
MILITARY SPECIFICATION SHEET

# CONNECTORS, ELECTRICAL, CIRCULAR, SCREW THREADS, HIGH SHOCK, HIGH DENSITY, SHIPBOARD, CRIMP CONTACTS DUMMY RECEPTACLE, WALL MOUNTING

This specification sheet is approved for use by the Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the accessories described herein shall consist of this document and the latest issue of specification MIL-C-28840

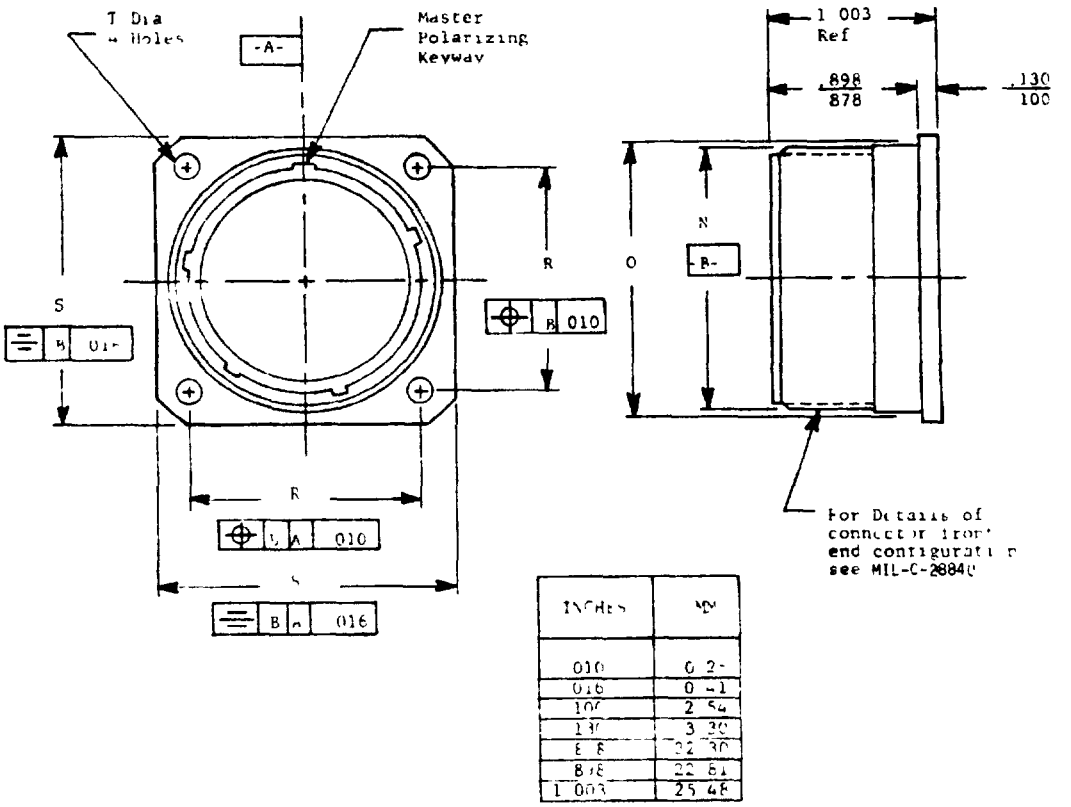


| INCHES | MM |
|---|---|
| 010 | 0 25 |
| 016 | 0 41 |
| 100 | 2 54 |
| 130 | 3 30 |
| .878 | 22 30 |
| .898 | 22 81 |
| 1 003 | 25 48 |

FIGURE 1 Dimensions and configuration



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:34Z
Check the source to verify that this is the current version before use.

(B)

TABLE I. Dimensions and configuration

| DESIG-NATOR 1/ | N DIA MAX | O REF MTG. HOLE | R. T.P. ℄ TO ℄ | S | T |
|---|---|---|---|---|---|
| A (11) | 750 (19 05) | 812 (20 62) | 750 (19 05) | 1.043 (26 49)<br>1 003 (25 48) | 130 (3 30)<br>115 (2 92) |
| B (13) | 875 (22 22) | 937 (23.80) | .843 (21.41) | 1 158 (29 41)<br>1.118 (28.40) | 130 (3 30)<br>.115 (2.92) |
| C (15) | 1 062 (26 97) | 1.124 (28 55) | .968 (24.59) | 1.278 (32.46)<br>1.238 (31.45) | .130 (3.30)<br>.115 (2.92) |
| D (17) | 1 125 (28 58) | 1 187 (30 15) | 1.015 (25.78) | 1 403 (35.64)<br>1.363 (34.62) | .130 (3.30)<br>.115 (2.92) |
| E (19) | 1.312 (33 32) | 1 374 (34 90) | 1.140 (28.96) | 1 528 (38 81)<br>1.488 (37.80) | 130 (3 30)<br>.115 (2.92) |
| F (23) | 1.500 (38 10) | 1 562 (39.67) | 1.281 (32.54) | 1.738 (44 15)<br>1.698 (43.13) | 130 (3.30)<br>.115 (2.92) |
| G (25) | 1 625 (41 28) | 1 687 (42 85) | 1 392 (35.36) | 1 838 (46 69)<br>1.798 (45 67) | 157 (3.99)<br>.142 (3.61) |
| H (29) | 1 812 (46 02) | 1 874 (47.60) | 1 568 (39.83) | 2 158 (54.81)<br>2.118 (53 80) | .157 (3.99)<br>.142 (3.61) |
| J (33) | 2 000 (50 80) | 2 062 (52 37) | 1.734 (44.04) | 2 348 (59 64)<br>2 308 (58 62) | .183 (4 65)<br>168 (4 27) |

NOTES

1 Shell sizes are provided within parentheses for information and are not a part of the designator.
2 Dimensions are in inches.
3. Metric equivalents (to the Nearest .01 mm) are given for general information only and are based upon 1.0 inch equals 25.4 mm.
4 Dimensions apply after plating
5 Normal mating keyway position shown For alternate keyway positions see MIL-C-28840



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:34Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I

Shell polarization: thru 6, key position


Marking: Part number on shell

Mating counterpart: Plug connectors specified in MIL-C-28840/16, /17, /18, /19, /26, /28, and /29

Material: Aluminum Alloy

Finish: Cadmium plate in accordance with QQ-P-416, type II, class 3 over nickel. Color: olive drab (500 hr salt spray)

EXAMPLE OF PART NUMBER M 28840/7 G 1

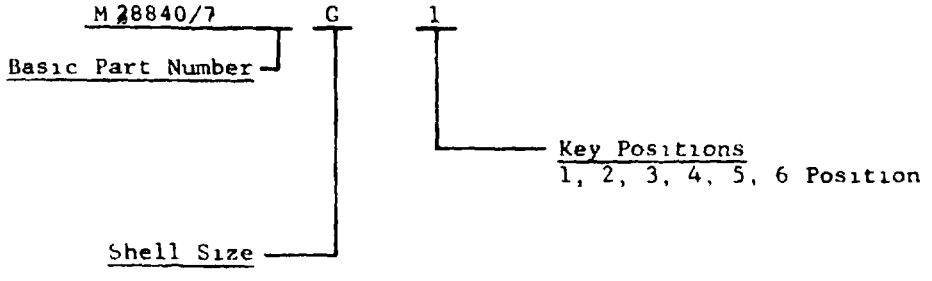


Preparing activity:
Navy - EC
(Project 5935-N174-6)

Review activities:
Navy - SH

User activities:
Navy - OS



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:34Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No 22-R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity

DOCUMENT IDENTIFIER AND TITLE
MIL-C-25340/13

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:34Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

**BUSINESS REPLY MAIL**

FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commander
Naval Electronic Systems Command
Defense Standardization Program Branch
Department Of The Navy
Washington, D.C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:34Z
Check the source to verify that this is the current version before use.