INCH-POUND

MIL-DTL-28840/7C
26 April 2007
SUPERSEDING
MIL-C-28840/7B(EC)
16 March 1979

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, SCREW THREADS, HIGH SHOCK, HIGH DENSITY, SHFSOARD, CRIMP CONTACTS, DUMMY RECEPTACLE, WALL MOUNTING

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-28840.

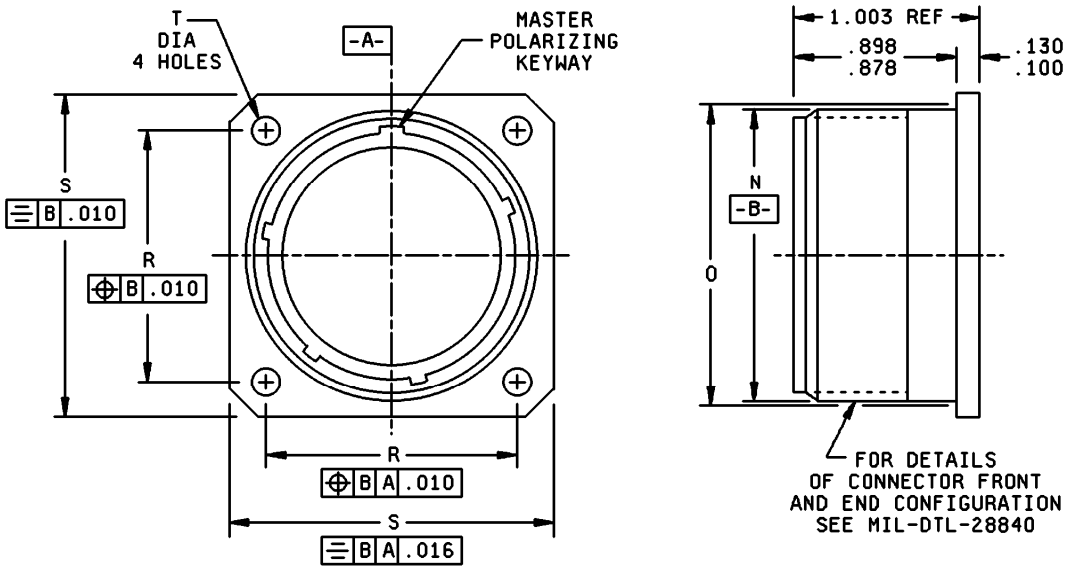

Inches	mm
.010	0.25
.016	0.41
.100	2.54
.130	3.30
.878	22.30
.898	22.81
1.003	25.48

FIGURE 1. Dimensions and configuration.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:34Z
Check the source to verify that this is the current version before use.

Designator 1/	N dia max	O Reference mating hole	R T.P. Centerline to centerline	S	T
A (11)	.750 (19.05)	.812 (20.62)	.750 (19.05)	1.043 (26.49) 1.003 (25.48)	.130 (3.30) .115 (2.92)
B (13)	.875 (22.22)	.937 (23.80)	.843 (21.41)	1.158 (29.41) 1.118 (28.40)	
C (15)	1.062 (26.97)	1.124 (28.55)	.968 (24.59)	1.278 (32.46) 1.238 (31.45)	
D (17)	1.125 (28.58)	1.187 (30.15)	1.015 (25.78)	1.403 (35.64) 1.363 (34.62)	
E (19)	1.312 (33.32)	1.374 (34.90)	1.140 (28.96)	1.528 (38.81) 1.488 (37.80)	
F (23)	1.500 (38.10)	1.562 (39.67)	1.281 (32.54)	1.738 (44.15) 1.698 (43.13)	
G (25)	1.625 (41.28)	1.687 (42.85)	1.392 (35.36)	1.838 (46.69) 1.798 (45.67)	.157 (3.99) .142 (3.61)
H (29)	1.812 (46.02)	1.874 (47.60)	1.568 (39.83)	2.158 (54.81) 2.118 (53 80)	
J (33)	2.000 (50.80)	2.062 (52.37)	1.734 (44.04)	2.348 (59.64) 2.308 (58.62)	.183 (4.65) .168 (4.27)

NOTES:
1. Shell sizes are provided within parentheses for information and are not a part of the designator.
2. Dimensions are in inches.
3. Metric equivalents are given for information only.
4. Dimensions apply after plating
5. Normal mating keyway position shown. For alternate keyway positions see MIL-DTL-28840.
6. Flange is solid.
7. Dummy receptacles are used when unmated plugs must be protected.

FIGURE 1. Dimensions and configuration – Continued.

REQUIREMENTS

Dimensions and configuration: See figure 1.
Shell polarization: 1 through 6, key position.
Marking: Part or Identifying Number (PIN) on shell.
Mating plugs: This receptacles mates with plugs in accordance with MIL-DTL-28840/16 through /19, /26, /28, and /29.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:34Z
Check the source to verify that this is the current version before use.

Material: Aluminum alloy.
Finish: Cadmium plate in accordance with SAE-AMS-QQ-P-416, type II, class 3 over nickel.
Color: Olive drab (500 hours salt spray).
Sealing gasket: Non-corrosive silicone or fluorosilicone elastomer.

PIN example:

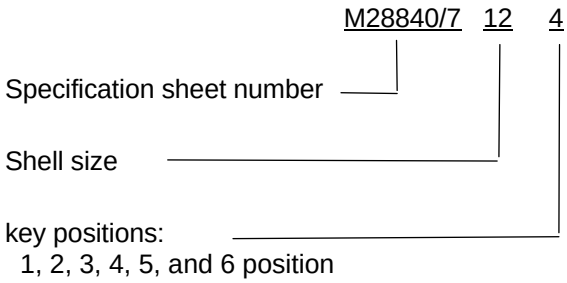

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-28840, this document references the following:

MIL-DTL-28840/16
MIL-DTL-28840/17
MIL-DTL-28840/18
MIL-DTL-28840/19
MIL-DTL-28840/26
MIL-DTL-28840/28
MIL-DTL-28840/29
SAE-AMS-QQ-P-416

CONCLUDING MATERIAL

Custodians:
Navy - EC
DLA - CC

Preparing activity:
DLA - CC

Review activities:
Navy - OS, SH

(Project 5935–2005-031)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:34Z
Check the source to verify that this is the current version before use.