INCH-POUND


MIL-DTL-28840/7D
23 October 2009
SUPERSEDING
MIL-DTL-28840/7C
26 April 2007

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, SCREW THREADS, HIGH SHOCK, HIGH DENSITY, SHIPBOARD, CRIMP CONTACTS, DUMMY RECEPTACLE, WALL MOUNTING

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-28840.

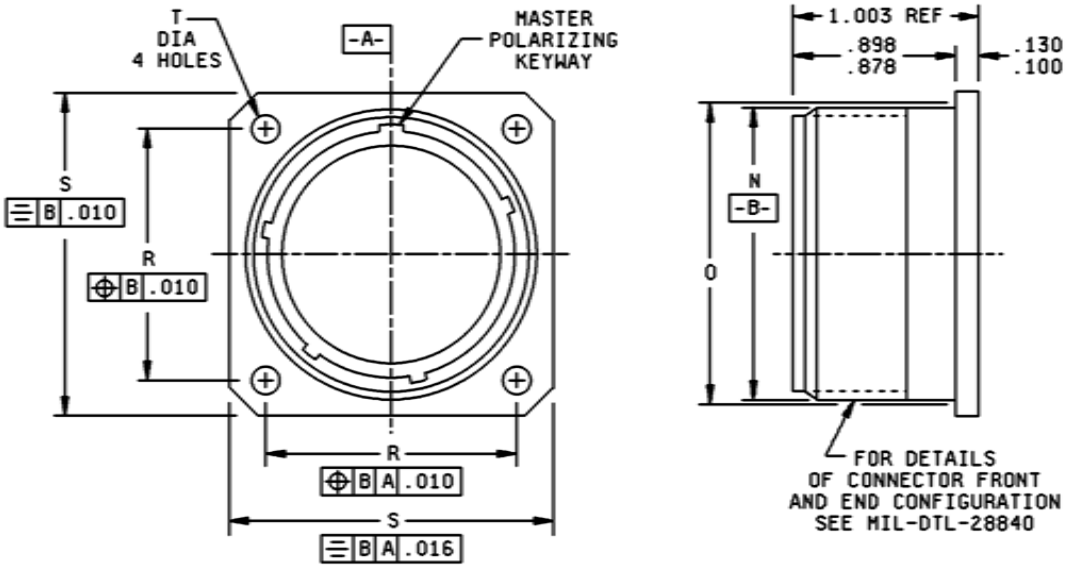

Inches	mm
.010	0.25
.016	0.41
.100	2.54
.130	3.30
.878	22.30
.898	22.81
1.003	25.48

FIGURE 1. Dimensions and configurations.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:34Z
Check the source to verify that this is the current version before use.

Designator See note 1	N dia max	O Reference mating hole	R T.P. Centerline to centerline	S	T
A (11)	.750 (19.05)	.812 (20.62)	.750 (19.05)	1.043 (26.49) 1.003 (25.48)	.130 (3.30) .115 (2.92)
B (13)	.875 (22.22)	.937 (23.80)	.843 (21.41)	1.158 (29.41) 1.118 (28.40)	
C (15)	1.062 (26.97)	1.124 (28.55)	.968 (24.59)	1.278 (32.46) 1.238 (31.45)	
D (17)	1.125 (28.58)	1.187 (30.15)	1.015 (25.78)	1.403 (35.64) 1.363 (34.62)	
E (19)	1.312 (33.32)	1.374 (34.90)	1.140 (28.96)	1.528 (38.81) 1.488 (37.80)	
F (23)	1.500 (38.10)	1.562 (39.67)	1.281 (32.54)	1.738 (44.15) 1.698 (43.13)	
G (25)	1.625 (41.28)	1.687 (42.85)	1.392 (35.36)	1.838 (46.69) 1.798 (45.67)	.157 (3.99) .142 (3.61)
H (29)	1.812 (46.02)	1.874 (47.60)	1.568 (39.83)	2.158 (54.81) 2.118 (53 80)	
J (33)	2.000 (50.80)	2.062 (52.37)	1.734 (44.04)	2.348 (59.64) 2.308 (58.62)	.183 (4.65) .168 (4.27)

NOTES:
1. Shell sizes are provided within parentheses for information and are not a part of the designator.
2. Dimensions are in inches.
3. Metric equivalents are given for information only.
4. Dimensions apply after plating
5. Normal mating keyway position shown. For alternate keyway positions see MIL-DTL-28840.
6. Flange is solid.
7. Dummy receptacles are used when unmated plugs must be protected.

FIGURE 1. Dimensions and configurations – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:34Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration: See figure 1.
Shell polarization: 1 through 6, key position.
Marking: Part or Identifying Number (PIN) on shell.
Mating plugs: This receptacles mates with plugs in accordance with MIL-DTL-28840/16 through /19, /26, /28, and /29.
Material: Aluminum alloy.
Finish: Finish in accordance with MIL-DTL-28840.
Color: Olive drab (500 hours salt spray).
Sealing gasket: Non-corrosive silicone or fluorosilicone elastomer.

PIN example:

M28840/7 G 1 **F**

Specification sheet number

Shell size

key positions:
1, 2, 3, 4, 5, and 6 position

Material and finish designator

No designator – aluminum alloy, cadmium plated
F – Wrought aluminum, pure electrodeposited aluminum – non-reflective
L - Wrought aluminum, Nickel Fluorocarbon Polymer – non-reflective
S - Wrought aluminum, zinc nickel – non-reflective

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Referenced documents. In addition to MIL-DTL-28840, this document references the following:

MIL-DTL-28840/16
MIL-DTL-28840/17
MIL-DTL-28840/18
MIL-DTL-28840/19
MIL-DTL-28840/26
MIL-DTL-28840/28
MIL-DTL-28840/29

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:34Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Navy - EC
DLA - CC

Preparing activity:
DLA - CC

Review activities:
Navy - OS, SH

(Project 5935-2007-219)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:34Z
Check the source to verify that this is the current version before use.