
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, THREADED, HIGH SHOCK, HIGH DENSITY, SHIPBOARD, BACKSHELL, 90°, CABLE SEALING AND SHIELD TERMINATION, CONNECTOR, ELECTRIC

This specification sheet is approved for use by the Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the accessories described herein shall consist of this document and the latest issue of specification MIL-C-28840.

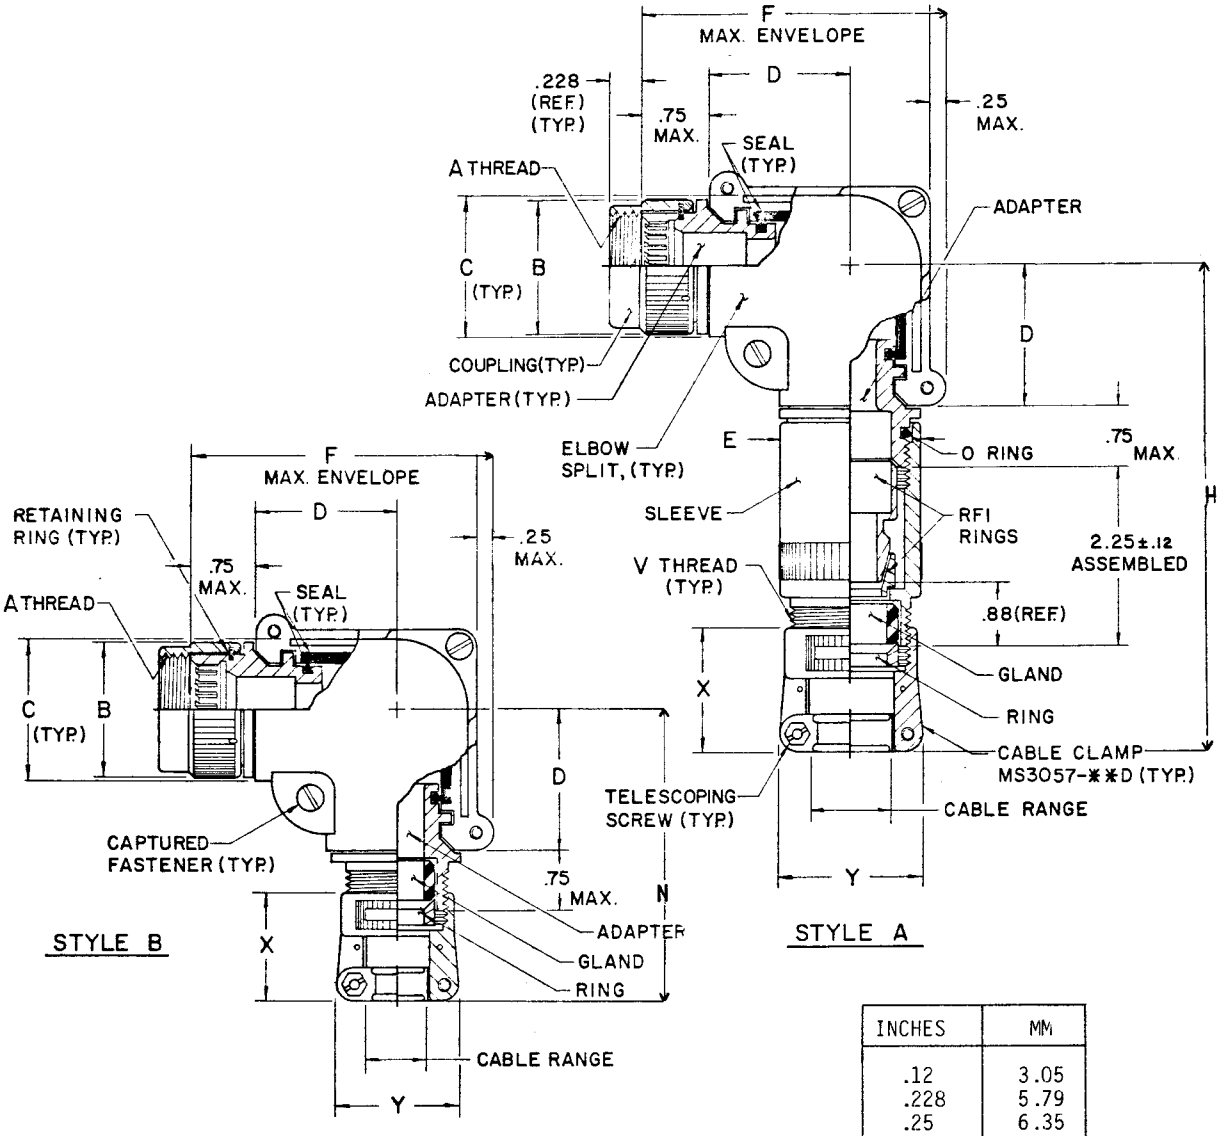

INCHES	MM
.12	3.05
.228	5.79
.25	6.35
.75	19.05
.88	22.35
2.25	57.15

FIGURE 1. Dimensions and configuration.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 20261O-20T19:35Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions and configuration.

BACK SHELL SIZE 5/	DASH NO.	DESIGNATOR 1/	A THREAD CLASS 2B	B MAX DIA	C MAX DIA	D MAX DIA	CABLE RANGE MAX	CABLE RANGE MIN	E MAX DIM	F MAX DIM	V THREAD CLASS 2*	X REF DIM	Y REF DIM	H MAX STYLE A	N MAX STYLE B
A	01	A(11)	.750-20 UNEF	1.028 (26.11)	1.031 (26.19)	1.031 (26.19)	.312 (7.92)	.188 (4.77)	1.156 (29.36)		.625-24 UNEF	1.281 (32.54)	.938 (23.82)	5.332 (134.43)	2.962 (75.23)
A	02	B(13)					.312 (7.92)	.188 (4.77)			.625-24 UNEF	1.281 (32.54)	.938 (23.82)	5.332 (134.43)	2.962 (75.23)
B	03	B(13)	.875-20 UNEF	1.141 (28.98)	1.031 (26.19)	1.031 (26.19)	.438 (11.12)	.281 (7.14)	1.156 (29.36)	2.614 (66.40)	.750-20 UNEF	1.281 (32.54)	1.125 (28.57)	5.332 (134.43)	2.962 (75.23)
A	04	C(15)					.312 (7.92)	.188 (4.77)			.625-24 UNEF	1.281 (32.54)	.938 (23.82)	5.457 (138.61)	3.087 (78.41)
B	05	C(15)	1.00-20 UNEF	1.263 (32.08)	1.281 (32.54)	1.156 (29.36)	.438 (11.12)	.281 (7.14)	1.281 (32.54)	2.864 (72.75)	.750-20 UNEF	1.281 (32.54)	1.125 (28.57)	5.457 (138.61)	3.087 (78.41)
C	06	C(15)					.562 (14.27)	.344 (8.74)			.875-20 UNEF	1.281 (32.54)	1.312 (33.32)	5.457 (138.61)	3.087 (78.41)
D	07	C(15)					.750 (19.05)	.438 (11.12)			1.188-18 UNEF	1.281 (32.54)	1.593 (40.62)	5.682 (144.32)	3.312 (84.12)
A	08	D(17)					.625 (15.87)	.375 (9.62)	1.406 (35.71)		1.000-20 UNEF	1.281 (32.54)	1.312 (33.32)	5.682 (144.32)	3.312 (84.12)
B	09	D(17)	1.125-18 UNEF	1.378 (35.23)	1.531 (38.89)	1.281 (32.54)	.750 (19.05)	.438 (11.12)		3.114 (79.10)	1.188-18 UNEF	1.312 (33.32)	1.593 (40.62)	5.713 (145.11)	3.343 (84.91)
C	10	D(17)					.938 (23.82)	.625 (15.87)	1.531 (38.89)		1.438-18 UNEF	1.406 (35.71)	1.750 (44.45)	5.807 (147.50)	3.437 (87.30)
A	11	E(19)	1.250-18 UNEF	1.513 (38.43)			.625 (15.87)	.375 (9.82)	1.406 (35.71)		1.000-20 UNEF	1.281 (32.54)	1.312 (33.32)	5.682 (144.32)	3.312 (84.12)
B	12	E(19)					.938 (23.82)	.625 (15.87)	1.531 (38.89)		1.438-18 UNEF	1.406 (35.71)	1.750 (44.45)	5.832 (148.13)	3.462 (87.93)
A	13	F(23)					.750 (19.05)	.438 (11.12)	1.406 (35.71)		1.188-18 UNEF	1.312 (33.32)	1.593 (40.62)	5.738 (145.75)	3.368 (85.55)
B	14	F(23)	1.438-18 UNEF	1.703 (43.51)	1.781 (45.24)	1.406 (35.71)	.938 (23.82)	.625 (15.87)	1.531 (38.89)		1.438-18 UNEF	1.406 (35.71)	1.390 (44.45)	5.832 (148.13)	3.462 (87.93)
C	15	F(23)					1.188 (30.17)	.812 (20.62)	1.781 (45.24)	3.364 (85.45)	1.750-18 UNS	1.593 (40.46)	2.093 (53.16)	6.019 (152.88)	3.649 (92.68)
A	16	G(25)					.938 (23.82)	.625 (15.87)	1.531 (38.89)		1.438-18 UNEF	1.406 (35.71)	1.750 (44.45)	5.832 (148.13)	3.462 (87.93)
B	17	G(25)	1.562-18 UNEF	1.825 (46.35)			1.188 (30.17)	.812 (20.62)	1.781 (45.24)		1.750-18 UNS	1.593 (40.46)	2.093 (53.16)	6.019 (152.88)	3.649 (92.68)
C	18	G(25)					1.250 (31.75)	.875 (22.23)			1.750-18 UNS	1.593 (40.46)	2.093 (53.16)	6.144 (156.06)	3.774 (95.86)
D	19	G(25)			2.031 (51.59)	1.531 (38.89)	1.380 (35.05)	1.000 (25.40)	2.156 (54.76)	3.614 (91.80)	2.000-18 UNS	1.625 (41.28)	2.343 (59.51)	6.176 (156.87)	3.806 (96.62)
A	20	H(29)	1.875-16 UN	2.143 (54.43)			1.188 (30.17)	.812 (20.62)	1.781 (45.24)		1.750-18 UNS	1.593 (40.46)	2.093 (53.16)	6.144 (156.06)	3.774 (95.86)
B	21	H(29)					1.380 (35.05)	1.000 (25.40)	2.156 (54.76)		2.000-18 UNS	1.625 (41.28)	2.343 (59.51)	6.176 (156.87)	3.806 (96.62)

Source: https://assist.dla.mil -- Downloaded: 202610-20T19:35Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions and configuration (continued)

BACK SHELL SIZE 5/	DASH NO.	DESIG-NATOR 1/	A THREAD CLASS 2B	B MAX DIM	C MAX DIM	D MAX DIM	CABLE RANGE MAX	CABLE RANGE MIN	E MAX DIM	F MAX DIM	V THREAD CLASS 2*	X REF DIM	Y REF DIM	H MAX STYLE A	N MAX STYLE B
A	22	J(33)	2.062-16 UNS	2.329 (59.16)	2.531 (64.29)	1.781 (45.24)	1.380 (35.05)	1.000 (25.40)	2.281 (57.94)	4.114 (104.50)	2.000-18 UNS	1.625 (41.28)	2.343 (59.51)	6.426 (163.22)	4.056 (103.02)
B	23	J(33)					1.625 (41.28)	1.250 (31.75)			2.250-16 UNS	1.900 (48.26)	2.750 (69.85)	6.701 (170.21)	4.331 (110.01)
B	24	A(11)	.750-20 UNEF	1.028 (26.11)	1.031 (26.19)	1.031 (26.19)	.438 (11.12)	.281 (7.14)	1.156 (29.36)	2.614 (66.40)	.750-20 UNEF	1.281 (32.54)	1.125 (28.57)	5.332 (135.43)	2.962 (75.23)
C	25	A(11)			1.281 (32.54)	1.156 (29.36)	.562 (14.27)	.344 (8.74)	1.281 (32.54)	2.864 (72.75)	.875-20 UNEF	1.281 (32.54)	1.312 (33.32)	5.457 (138.61)	3.087 (78.41)
C	26	B(13)	.875-20 UNEF	1.141 (28.98)	1.281 (32.54)	1.156 (29.36)	.562 (14.27)	.344 (8.74)	1.281 (32.54)		.875-20 UNEF	1.281 (32.54)	1.312 (33.32)	5.457 (138.61)	3.087 (78.41)
D	27	B(13)			1.531 (38.89)	1.281 (32.54)	.625 (15.87)	.375 (9.52)	1.406 (35.71)	3.114 (79.10)	1.000-20 UNEF	1.281 (32.54)	1.312 (33.32)	5.682 (144.32)	3.312 (84.12)
E	28	C(15)	1.000-20 UNEF	1.263 (32.08)			.625 (15.87)	.375 (9.52)			1.000-20 UNEF	1.281 (32.54)	1.312 (33.32)	5.682 (144.32)	3.312 (84.12)

NOTES:

1. Shell sizes are provided within parentheses for information and are not a part of the designator.
2. Dimensions are in inches.
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1.0 inch equals 25.4 mm.
4. Dimensions apply after plating.
5. Designator of backshell size within each shell size.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:35Z
Check the source to verify that this is the current version before use.


REQUIREMENTS

Dimensions and configurations: See figure 1 and table I.
Interface dimensions shall conform to MIL-C-28840, figure 7.

Material shall be aluminum alloy, in accordance with QQ-A-225, QQ-A-591, or QQ-A-601; or corrosion resistant steel, in accordance with QQ-S-763, class 316.

Finish: Aluminum components shall be cadmium plate, olive drab over electroless nickel. Corrosion resistant steel components shall be cadmium plate, black. The screws and washers shall be passivate in accordance with QQ-P-35.

Marking: The backshell shall be identified with the manufacturer's name or trade-mark and the part number. The example of the part number is as follows:

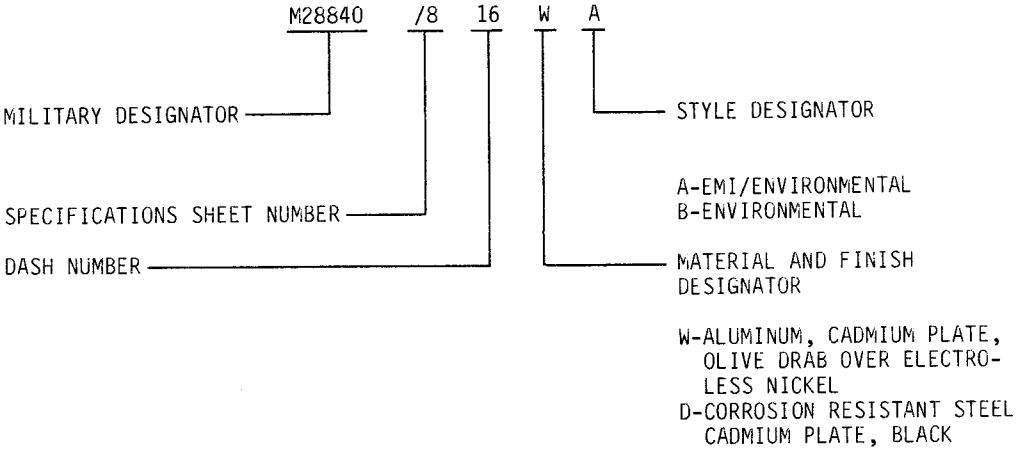

QUALIFICATION: One sample in each shell size for which qualification is desired shall be tested in accordance with MIL-C-28840, Table V, Group 5.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Navy - EC

(Project 5935-N248-1)

Source: https://assist.dla.mil -- Downloaded: 20261O-20T19:35Z
Check the source to verify that this is the current version before use.