
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR THREADED, HIGH SHOCK, HIGH DENSITY, SHIPBOARD, BACKSHELL, 45°, CABLE SEALING AND SHIELD TERMINATION, CONNECTOR, ELECTRIC

This specification sheet is approved for use by the Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense

The complete requirements for procuring the accessories described herein shall consist of this document and the latest issue of specification MIL-C-28840

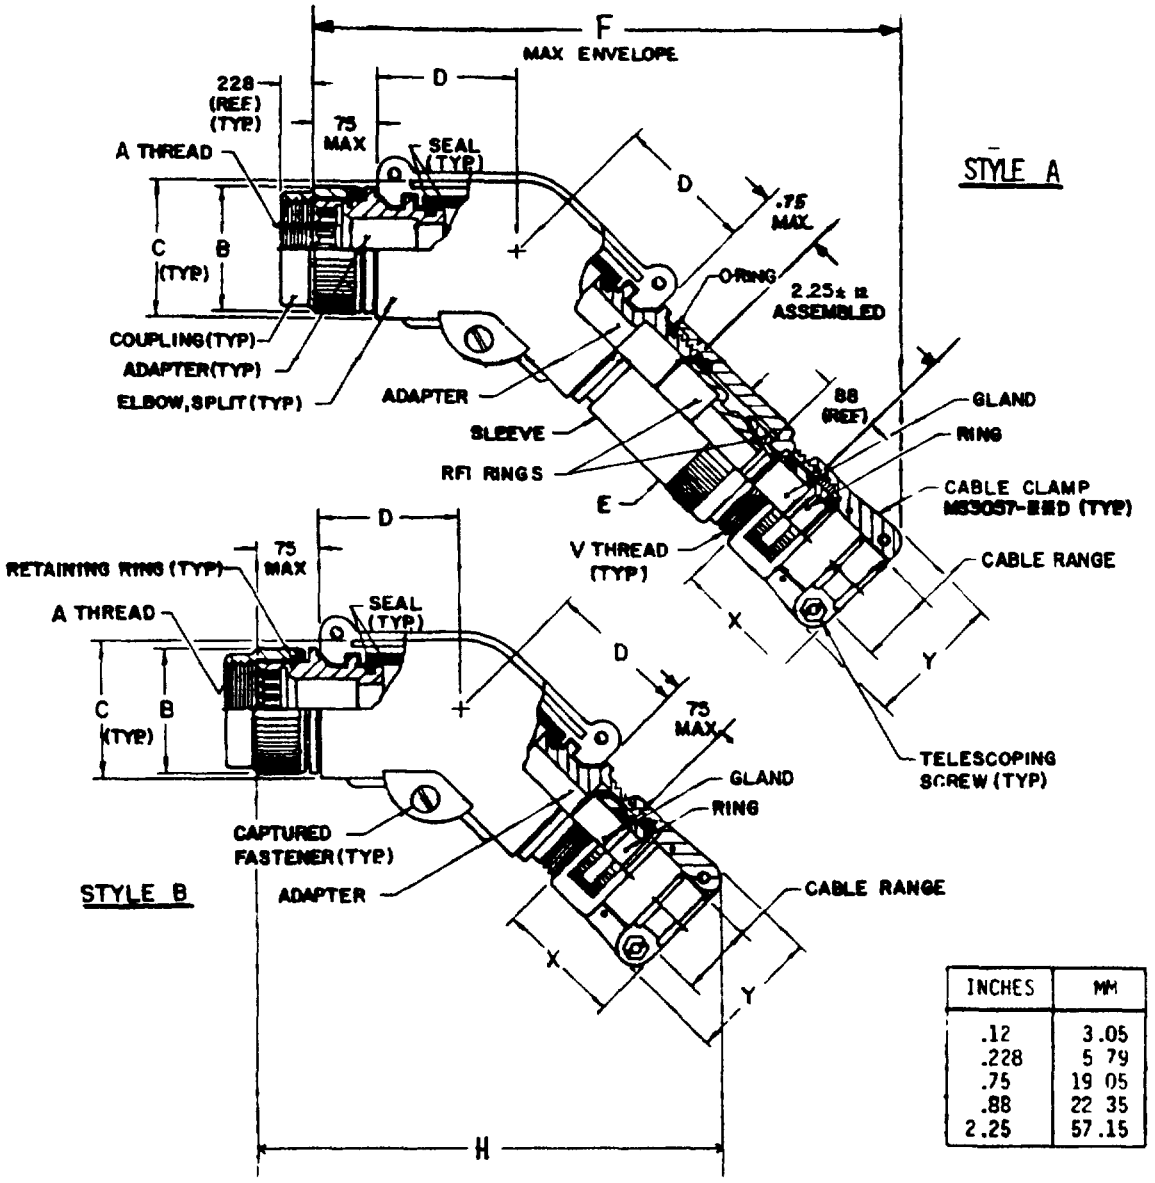

INCHES	MM
.12	3.05
.228	5 79
.75	19 05
.88	22 35
2.25	57.15

FIGURE 1 Dimensions and configuration.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:35Z
Check the source to verify that this is the current version before use.

TABLE I Dimensions and configuration

BACK SHELL SIZE 5/	CASH NO	DESIG-NATOR 1/	A THREAD	B MAX	C MAX	D MAX	CABLE RANGE MAX	CABLE RANGE MIN	E MAX	F MAX STYLE A	H MAX STYLE B	V THREAD CLASS 2*	X REF DIM	Y REF DIM
[illegible]	01	A(11)	750-20 UNEF	1.026 (26.11)	1 031 (26 19)	1 031 (26 19)	.312 (7.92)	.188 (4.77)	1 156 (29.36)	5 879 (149 33)	4.199 (106 65)	625-24 UNEF	1 281 (32 54)	938 (23.82)
[illegible]	02	B(13)	.875-20 UNEF	1.141 (28 98)			.312 (7.92)	.188 (4.77)		5 879 (149.33)	4 199 (106 65)	625-24 UNEF	1.281 (32 54)	938 (23.82)
[illegible]	03	B(13)					438 (11.12)	281 (7.14)		5 932 (150.67)	4 252 (108.00)	.750-20 UNEF	1 281 (32.54)	1 125 (28.57)
[illegible]	04	C(15)	1 000-20 UNEF	1.263 (32 08)	1.281 (32.54)	1 156 (29 36)	.312 (7.92)	.188 (4.77)	1.281 (32 54)	6 092 (154.74)	4 412 (112 06)	625-24 UNEF	1.281 (32.54)	938 (23.82)
[illegible]	05	C(15)					438 (11.12)	.281 (7.14)		6 146 (156 11)	4 466 (113 44)	750-20 UNEF	1 281 (32.54)	1 125 (28.57)
[illegible]	06	C(15)					562 (14.27)	344 (8.74)		6 202 (157 53)	4 522 (114.86)	875-20 UNEF	1.281 (32.54)	1 312 (33.32)
[illegible]	07	C(15)			1 513 (38 89)	1 281 (32 54)	.750 (19.05)	.438 (11.12)	1 406 (35 71)	6 533 (165.94)	4 853 (123.27)	1 188-18 UNEF	1.312 (33.32)	1.593 (40.62)
[illegible]	08	D(17)	1 125-18 UNEF	1 387 (35 23)			625 (15.87)	375 (9.52)		6 413 (162.89)	4 733 (120.22)	1 000-20 UNEF	1.281 (32.54)	1 312 (33.32)
[illegible]	09	D(17)					750 (19 05)	438 (11.12)		6 533 (165.94)	4 853 (123 27)	1 188-18 UNEF	1 312 (33.32)	1 395 (40.62)
[illegible]	10	D(17)					938 (23.82	625 (15 87)	1.531 (38.89)	6 636 (168.55)	4 956 (125 88)	1 438-18 UNEF	1 406 (35.71)	1 750 (44.45)
[illegible]	11	E(19)	1 250-18 UNEF	1 513 (38 43)			625 (15.87)	375 (9 52)	1 406 (35 71)	6 413 (162 89)	4 733 (120 22)	1 000-20 UNEF	1 281 (32 54)	1 312 (33.32)
[illegible]	12	E(19)			1.781 (45 24)	1 406 (35 71	938 (23.82)	625 (15 87)	1 531 (38.89)	6 846 (173 89)	5 166 (131 22)	1 438-18 UNEF	1 406 (35 71)	1 750 (44 45)
[illegible]	13	F(23)	1 438-18 UNEF	1.703 (43.51)			750 (19.05)	438 (11 12)	1 406 (35.71)	6 747 (171.37)	5 067 (128 70)	1 188-18 UNEF	1 312 (33.32)	1.593 (40.62)
[illegible]	14	F(23)					938 (23 82)	625 (18 87)	1 531 (38.69)	6 846 (173 89)	5 166 (131.22)	1 438-18 UNEF	1.406 (35.71)	1 750 (44.45)
[illegible]	15	F(23)					1.388 (30.17)	812 (20.62)	1 781 (45.62)	7 103 (180.42)	5 423 (138.23)	1 750-18 UNS	1.593 (40.46)	2 093 (53.16)
[illegible]	16	G(25)	1 562-18 UNEF	1.825 (46.35)			938 (23.82)	625 (15.87)	1 531 (38.89)	6 846 (173.89)	5.156 (130.96)	1 438-18 UNEF	1 406 (35.71)	1.750 (44.45)
[illegible]	17	G(25)					1.188 (30.17)	812 (20.62)	1.781 (45.24)	7 103 (180.42)	5 423 (138.23)	1 750-18 UNS	1 593 (40.46)	2.093 (53.16)
[illegible]	18	G(25)			2.031 (51 59)	1 531 (38.89)	1 250 (31.75)	875 (22.23)		7 316 (185.83)	5 636 (143.15)	1 750-18 UNS	1 593 (40.46)	2.093 (53.16)
[illegible]	19	G(25)					1 380 (35.05)	1 000 (25.40)	2 156 (54.76)	7 425 (188.60)	5 745 (145.92)	2 000-18 UNS	1 625 (41.28)	2.343 (59.51)
[illegible]	20	H(29)	1 875-16 UN	2.143 (54 43)			1 188 (30.17)	812 (20 62)	1 781 (45.24)	7 316 (185 83)	5 636 (143.15)	1 750-18 UNS	1 593 (40 46)	2.093 (53.16)
[illegible]	21	H(29)					1 380 (35 05)	1 000 (25 40)	2.156 (54 76)	7 425 (188 60)	5 745 (145 92)	2 000-18 UNS	1 625 (41 28)	2.343 (59 51)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:35Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions and configuration (continued)

BACK SHELL SIZE 5/	DASH NO	DESIG-NATOR 1/	A THREAD	B MAX	C MAX	D MAX	CABLE RANGE MAX	CABLE RANGE MIN	E MAX	F MAX STYLE A	H MAX STYLE B	V THREAD CLASS 2*	X REF DIM	Y REF DIM
A	22	J(33)	2 062-16 UNS	2.329 (59.16)	2 531 (64.29)	1.781 (45.24)	1 380 (35 05)	1.000 (25.40)	2.281 (57 94)	7 852 (199 44)	6.127 (156.77)	2 000-18 UNS	1 625 (41.28)	2.343 (59.51)
B	23	J(33)					1 625 (41.28)	1 250 (31.75)		8 134 (206.60)	6 454 (163.93)	2 250-16 UNS	1 900 (48.26)	2 750 (69.85)
B	24	A(11)	750-20 UNEF	1.028 (26.11)	1.031 (26.19)	1 031 (26.19)	438 (11.12)	.281 (7.14)	1.156 (29.36)	5 932 (150.67)	4.252 (108.00)	750-20 UNEF	1.281 (32.54)	1.125 (28.57)
C	25	A(11)			1.281 (32.54)	1.156 (29.36)	562 (14.27)	.344 (8.74)	1.281 (32.54)	6 202 (157.53)	4 522 (114.86)	875-20 UNEF	1 281 (32.54)	1.312 (33.32)
C	26	B(13)	875-20 UNEF	1.141 (28 98)	1.281 (32 54)	1 156 (29.36)	562 (14 27)	344 (8.74)	1.281 (32.54)	6 202 (157.53)	4 522 (114.86)	875-20 UNEF	1.281 (32 54)	1.312 (33.32)
D	27	B(13)			1.531 (38 89)	1 281 (32 54)	625 (15 87)	375 (9 52)	1.406 (35 71)	6 413 (162 89)	4 733 (120.22)	1 000-20 UNEF	1 281 (32 54)	1.312 (33.32)
E	28	C(15)	1 000-20 UNEF	1.263 (32.08)			625 (15 87)	375 (9 52)		6.413 (162 89)	4 733 (120 22)	1 000-20 UNEF	1.281 (32 54)	1.312 (33 32)

NOTES:

1. Shell sizes are provided within parentheses for information and are not a part of the designator
2. Dimensions are in inches
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1.0 inch equals 25 4 mm
4. Dimensions apply after plating.
5. Designator of backshell size within each shell size

Source: https://assist.dla.mil - Downloaded: 2026-10-20T19:35Z
Check the source to verify that this is the current version before use.


REQUIREMENTS

Dimensions and configurations See figure 1 and table I.
Interface dimensions shall conform to MIL-C-28840, figure 7.

Material shall be aluminum alloy, in accordance with QQ-A-225, QQ-A-591, or QQ-A-601, or corrosion resistant steel, in accordance with QQ-S-763, class 316

Finish Aluminum components shall be cadmium plate, olive drab over electroless nickel Corrosion resistant steel components shall be cadmium plate, black The screws and washers shall be passivate in accordance with QQ-P-35

Marking. The backshell shall be identified with the manufacturer's name or trade-mark and the part number The example of the part number is as follows

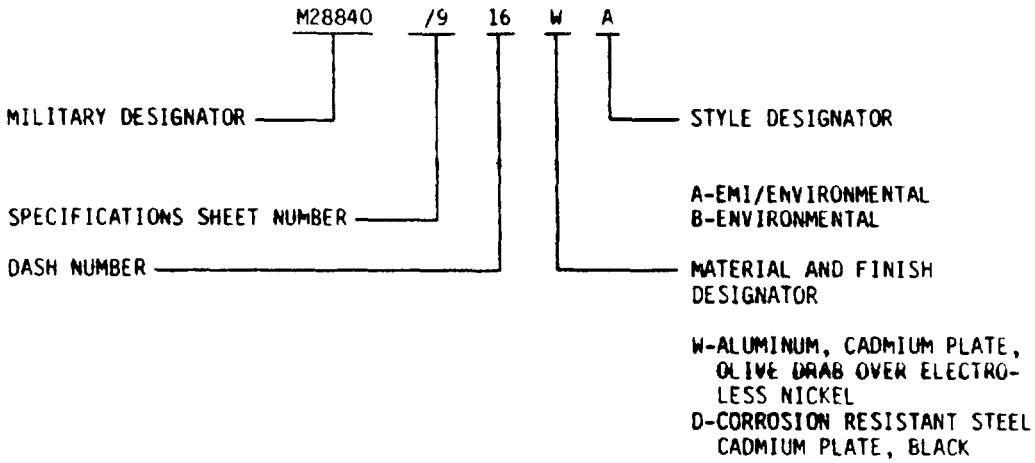

QUALIFICATION: One sample in each shell size for which qualification is desired shall be tested in accordance with MIL-C-28840, Table V, Group 5.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity
Navy - EC

(Project 5935-N248-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:35Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE. This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY
Naval Electronic Systems Command
Washington, DC 20363

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20363
ATTN: ELEX 8111

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:35Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-28840/9D(EC)	CONNECTORS, ELECTRICAL, CIRCULAR THREADED, HIGH SHOCK, HIGH DENSITY, SHIPBOARD, BACKSHELL, 45°, CABLE SEALING AND SHIELD TERMINATION, CONNECTOR, ELECTRIC

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)* _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:35Z
Check the source to verify that this is the current version before use.