17 May 1968
SUPERSEDING
MIL-B-13842B
21 June 1963

MILITARY SPECIFICATION

BAGS, SOILED CLOTHES

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

* 1.1 Scope.- This specification covers three types of cotton duck bags for soiled clothes.

1.2 Classification.- The bags shall be of the following types as specified (see 6.2).

Type II - Bag, Soiled Clothes, Large
Type III - Bag, Soiled Clothes, Intermediate

2. APPLICABLE DOCUMENTS

* 2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

T-C-571	-	Cords, Cotton; General and Special Purpose, Sash and Venetian Blind
V-T-285	-	Thread, Polyester
UU-P-268	-	Paper, Kraft, Untreated, Wrapping
CCC-C-419	-	Cloth, Duck, Cotton, Unbleached, Plied-Yarns, Army and Numbered
CCC-D-950	-	Dyeing and After Treating Processes for Cotton Cloths
DDD-L-20	-	Label; for Clothing, Equipage and Tentage, (General Use)
PPP-B-636	-	Box, Fiberboard
PPP-F-320	-	Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:28Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-G-16491 - Grommet, Metallic

STANDARDS

FEDERAL

Fed. Std. No. 751 - Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-147 - Palletized and Containerized Unit Loads 40" x 48" 4-Way (Partial) Pallet Skids, Runners, or Pallet-Type Base
MS - 16686 - Medical Services Symbol.

DRAWINGS

ARMY NATICK LABORATORIES

2-3-95 - Bag, Soiled Clothes, Large, Type II and Intermediate Type III; Assembly, Sections and Illustration
2-3-96 - Bag, Soiled Clothes, Large, Type II, Intermediate, Type III; Details.

(Figures 1 and 2 are minature reproductions of referenced drawings and are attached for information only.)

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

* 3.1 First article.- Unless otherwise specified (see 6.2), before production is commenced, a sample of the bag covered by this specification shall be submitted or made available to the contracting officer or his authorized representative for approval. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of the responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:28Z
Check the source to verify that this is the current version before use.

* 3.2 Materials and components.-

3.2.1 Bag, soiled clothes, large, type II.-

* 3.2.1.1 Cloth, duck, cotton.- The cloth shall conform to type I, No. 10 hard texture, 14.35 ounces per square yard of CCC-C-419.

* 3.2.1.2 Thread, polyester.- The thread shall be natural in color and shall conform to type I or II, class 1, subclass A of V-T-285. Thread sizes shall be as follows:

For all stitching except stitching indicated by "Z" on drawings	- Size FF for needle and bobbin
For stitching indicated by "Z" on drawing	- Size FF for needle, size F for bobbin

* 3.2.1.3 Cord, cotton.- The cord shall conform to type I, class 1, No. 6, 3/16 inch diameter, of T-C-571.

* 3.2.1.4 Grommets, metallic.- The grommets with washers shall conform to type III, class 3, No. 4 of MIL-G-16491.

3.2.2 Bag, soiled clothes, intermediate, type III.-

* 3.2.2.1 Cloth, duck, cotton.- The cloth shall conform to type I, No. 10 hard texture, 14.35 ounces per square yard of CCC-C-419.

* 3.2.2.1.1 Color and treatment.- The cloth shall be unbleached, desized, water-repellent and mildew-resistant treated in accordance with class B treatment of CCC-D-950.

3.2.2.2 Thread, polyester.- The polyester thread shall be as specified in 3.2.1.2.

* 3.2.2.3 Cord, cotton.- The cord shall conform to type I, class 3, No. 6, 3/16 inch diameter of T-C-571.

3.2.2.4 Grommets, metallic.- The grommets with washers shall conform to type III, class 1, No. 4 of MIL-G-16491.

3.3 Construction.- The construction shall conform in all respects to the drawings listed in section 2 and as specified herein.

3.3.1 Stitching, machine.-

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:28Z
Check the source to verify that this is the current version before use.

* 3.3.1.1 Stitch types.- Stitch types shall conform to Fed. Std. No. 751 as follows:

For all stitching except stitching indicated by "Z" on drawings	- Type 301, 5 to 7 stitches per inch
For stitching indicated by "Z" on drawings	- Type 401, 5 to 7 stitches per inch. The chain portion of 401 stitching shall not appear on the outside of the bags.

* 3.3.1.2 Thread breaks.- Thread breaks in stitching shall be overstitched not less than 1 inch at each break on stitch type 301 and not less than 1-1/2 inches on stitch type 401. Thread breaks in type 401 stitching may be overstitched with stitch type 301.

* 3.3.1.3 Stitching ends (type 301).- The ends of type 301 stitching shall be overstitched not less than 1 inch except where ends are turned under in a hem or held down by other stitching. Where stitching is performed automatically for stitch patterns such as box, box with cross-stitch, "W" stitching or straight line tacking; 3 or more tying, overlapping or backstitches shall be used to secure the ends of stitching.

* 3.3.1.4 Skipped stitches.- Where 2 or more consecutively skipped stitches occur in type 301 stitching, they shall be overstitched not less than 1 inch. Any skipped stitches in type 401 stitching shall be overstitched not less than 1-1/2 inches. Skipped stitches in type 401 stitching may be overstitched with type 301 stitching.

3.3.2 Setting of grommets.- Holes punched to receive the grommets shall be smaller than the outside diameter of the grommet barrel so that the barrel must be forced through the hole. The grommets shall be securely clinched without cutting the material.

3.4 Markings.-

* 3.4.1 Identification marking.- Identification markings shall conform to type IV, class 5 of DDD-L-20 and shall be applied in the location shown on the drawings.

* 3.4.2 Special markings.- The medical service symbol shall conform to type I of MS 16686 and shall appear on all bags in the size and locations indicated on drawings. The letters "U.S.", and nomenclature of the item shall be applied in the size characters and in the location indicated on the drawings and shall conform to type IV, class 9 of DDD-L-20. Class 9 markings shall be clearly legible after subjection to accelerated laundering.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:28Z
Check the source to verify that this is the current version before use.

* 3.4.3 Markings are not required for the type III bag when furnished for Naval shipboard use (see 6.2).

* 3.5 Workmanship.- Cloth components shall be clean and free of holes, cuts, tears, or cloth defects such as multiple floats, broken or missing yarns. Cord components shall be free of cuts, breaks, or abrasions. Seam allowances shall be maintained with seams sewed so that no run-offs, twists, or pleats or open seams shall result. Thread tension shall be maintained so that there shall be no loose or tight stitching. All thread ends shall be trimmed to 1/2 inch or less in length. Care shall be exercised in sewing to see that no needle chews occur. Metal components shall be free of burrs, sharp edges or corroded areas and shall not be broken or malformed.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 First article inspection.- When a preproduction sample is required, it shall be examined for defects listed in table I and dimensions specified.

* 4.3 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

* 4.3.1 Component and material inspection.- In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

* 4.3.2 Process examination.- Examination shall be made to determine that holes punched to receive grommets are in compliance with 3.3.2. Whenever nonconformance is noted correction shall be made to the item affected and to the process.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:28Z
Check the source to verify that this is the current version before use.

* 4.3.3. End product.- The lot shall consist of all completely fabricated bags of one type offered for inspection at one time. The sample unit shall be one completely fabricated bag. The inspection levels and acceptable quality levels (AQL's) shall be as specified in 4.3.3.3.

* 4.3.3.1 Visual examination.- The completely fabricated bag shall be examined for defects in table I.

* TABLE I.- Classification of defects for visual characteristics

Examine	Defect	Classification Major	Minor A	Minor B
Fabric	Hole, cut or tear	X		
	Any broken or missing yarn, multiple floats clearly visible at normal inspection distance (approximately 3 feet)		X	
Cord	Any cut, any break or abrasion		X	
Grommets	Improperly set, two or more teeth exposed			X
	Clinched loosely, allowing grommet to rotate in hole			X
	Clinched excessively tight, cutting fabric	X		
	Insecurely clinched; i.e., grommet or washer become disengaged	X		
	Corroded area			X
	Burr or sharp edge which may cause injury in handling or damage to fabric	X		
Seams and stitching	Open seam on stitch type 301:			
	- for more than 1/4 inch but not more than 1 inch		X	
	- for more than 1 inch	X		
	Open seam on stitch type 401:			
	- one row of stitching open for 1 inch or less			X
	- one row of stitching open for more than 1 inch		X	
	- both rows of stitching open (not necessarily at same location)	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:28Z
Check the source to verify that this is the current version before use.

* TABLE I.- Classification of defects for visual characteristics (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Seams and stitching (cont'd)				
	NOTE: A seam shall be classified as open when one or more stitches joining a seam are broken, or when one or more skipped or runoff stitches occur. On double stitched seams, a seam shall be classified as open when either one or both sides of seam are open.			
	Raw edges caught in stitching:			
	- more than 1 inch but not more than 3 inches			X
	- more than 3 inches		X	
	Thread breaks:			
	- overstitched less than 1-1/2 inches on stitch type 401			X
	- overstitched less than 1 inch on stitch type 301			X
	NOTE: Thread breaks not overstitched shall be classified as open seams.			
	Needle chews resulting in hole, cut or tear	X		
	Skipped stitches overstitched:			
	- less than 1 inch on stitch type 301 (where 2 or more stitches are skipped consecutively)			X
	- less than 1-1/2 inches on stitch type 401			X
	NOTE: Skipped stitches not overstitched shall be classified as open seams.			
	One or more required rows of stitching omitted (except on boxstitching)	X		
Boxstitching	Incomplete:			
	- one row of stitching omitted			X
	- two or more rows of stitching omitted		X	
	Any boxstitching less than specified length by more than 1/8 inch			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:28Z
Check the source to verify that this is the current version before use.

* TABLE I.- Classification of defects for visual characteristics (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Stitching ends	Overstitched less than 1 inch on stitch type 301 (except where ends are held down by other stitching, turned under in hem, or where stitching is performed automatically)		X	
	Secured with less than 3 tying, overlapping or backstitches when automatic stitching is performed		X	
Seam type	Wrong seam type	X		
	Seam pleated			X
Stitch type	Wrong stitch type	X		
Stitch tension	Loose, resulting in an exposed bobbin or top thread			X
	Tight, as evidenced by puckering on seams		X	
Stitches per inch	Less than minimum specified: - one stitch			X
	- two or more stitches		X	
	One or more stitches in excess of maximum specified			X
NOTE:	Variation in the number of stitches per inch, caused by the operator speeding up the machine in order to sew over heavy places or in turning corners, shall be classified as follows: a. Within the minor "A" defect classification - minor B defect b. Within the minor "B" defect classification - no defect			

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:28Z
Check the source to verify that this is the current version before use.

* TABLE I.- Classification of defects for visual characteristics (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Stitching margin	Larger than specified by more than 3/16 inch:			
	- for more than 2 inches but not more than 4 inches in length			X
	- for more than 4 inches in length		X	
Stitching indicated by "Z" on drawing	Chain portion of stitching shows on outside of bag	X		
Components and assembly	Any component or required operation omitted (unless otherwise classified herein)	X		
Hems	Formed on outside of bag	X		
Drawstring	Not threaded through grommets or both ends of cord not threaded through side grommet		X	
	Ends not overhand knotted			X
Handles	Not constructed as indicated on Drawing 2-3-96		X	
Body	Formed with more than two pieces of fabric		X	
Marking	Omitted, incorrect, illegible or misplaced			X
Cleanness	Grease or oil stains			X
	Thread ends not trimmed to 1/2 inch or less			X

* 4.3.3.2 Dimensional examination.- Examination shall be made of the bag for dimensional characteristics. Any dimension not within the specified tolerances shall be classified as a defect.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:28Z
Check the source to verify that this is the current version before use.

* 4.3.3.3 Inspection levels and AQL's.- The inspection levels and AQL's expressed in terms of defects per hundred units shall be as follows:

Examination	Inspection level	AQL
For defects applicable to 4.3.3.1	II	2.5 Major 6.5 Major and minor A defects combined 15.0 Total major, and minor A and B defects combined
For defects applicable to 4.3.3.2	S-3	10.0 One class

* 4.3.4 Examination of preparation for delivery requirements.- An examination shall be made to determine that packaging, packing and marking requirements are in compliance with section 5 of this specification. Defects shall be scored in accordance with table II. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be the number of shipping containers offered for delivery at one time. The inspection level shall be S-2 and the AQL shall be 2.5 expressed in terms of defects per hundred units.

* TABLE II.- Examination of preparation for delivery

Examine	Defect
Marking	Omitted; incorrect; illegible; or improper size, location, sequence or method of application
Materials	Any component missing or damaged
Workmanship	Contents of container not completely covered top or bottom with kraft paper
	Bulging or distortion of containers
Contents	Number per container is more or less than required

* 4.3.5 Examination of shipping container.- When shipping containers are required to be in accordance with PPP-B-636, examination for closure, waterproofing and reinforcing shall be made in accordance with the appendix of that specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:28Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.- Each bag, with the drawstring ends tucked inside the bag, shall be compactly folded. While folding, care shall be taken that the grommet edges are positioned within the folds. Five folded bags, of one type only, shall be stacked to form an even bundle and securely crosstied or tied at each end with cotton cord or twine.

* 5.1.2 Level C.- Bags shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

* 5.2.1 Level A.- Bags of one type only, packaged as specified in 5.1, shall be packed in the quantities as specified in table III within a close-fitting fiberboard shipping container conforming to grade V2s style RSC-L of PPP-B-636. Each box shall be fitted with a taped liner conforming to grade V3c of PPP-B-636. Each shipping container shall have the contents completely covered on the top and bottom with a sheet of 30 pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Each container shall be waterproofed, closed and reinforced with flat strapping or tape banding in accordance with the appendix of the box specification.

* 5.2.2 Level B.- Bags, of one type only, packaged as specified in 5.1, shall be packed in the quantities as specified in table III within a close-fitting fiberboard shipping container conforming to type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. Each box shall be fitted with a taped liner conforming to type CF, variety SW, class domestic, grade 275 of PPP-B-636. Each shipping container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Each container shall be closed in accordance with Method II as specified in the appendix of the container specification.

TABLE III.- Packing quantities of bags

Type	Quantity (each) per shipping container
II	15
III	15

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:28Z
Check the source to verify that this is the current version before use.

* 5.2.2.1 When specified (see 6.2) the shipping container shall be grade V3c or V3s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix of the container specification. The shipping container material may also be grade V4s of PPP-F-320.

5.2.3 Level C.- Bags, packaged as specified in 5.1, shall be packed in a manner to assure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

* 5.3 Palletization.- Bags packed as specified shall be palletized in accordance with load type I or MIL-STD-147, except that for overseas shipment the over-all height of the load shall not exceed 43 inches. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L. Container patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the container patterns specified in MIL-STD-147, the container pattern used shall be approved by the contracting officer.

5.4 Marking.- In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use.-

6.1.1 Bag, soiled clothes, large.- The type II bag is used as a general all purpose laundry bag for hand-carry in those instances where the conveyor or casters is not indicated. The bag is used jointly by the Medical Services of the Army, Navy and Air Force and appears in the Federal Supply Catalog, DOD Section, Medical Material as Bag, Soiled Clothes, Large.

6.1.2 Bag, soiled clothes, intermediate.- The type III bag is used by the Navy for storing bedding and linens aboard ship and requires the mildew resistant and water repellent treatment.

* 6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Stock number.
(c) Type required (see 1.2).
(d) First article.- When preproduction sample is not required (see 3.1).
(e) Whether type III bag will or will not be furnished for Naval shipboard use (see 3.4.3).
(f) Selection of applicable level of packaging and packing (see 5.1 and 5.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:28Z
Check the source to verify that this is the current version before use.

(g) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

* 6.3 The approximate weights (in pounds) of Bags, Soiled Clothes are:

Type II - 4.18
Type III - 3.31

6.4 Supersession data.- The type I and type IV bags of MIL-B-13842B are no longer required by the military services and have been deleted from this revision.

6.5 The margins of this specification are marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Navy - SA
Air Force - 82

Review activities:
Army - MD
Navy - SA
Air Force - 82, 85
DSA - DM


User activity:
Navy - MC

Preparing activity:


Army - GL

Project No. 8465-0351

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:28Z
Check the source to verify that this is the current version before use.

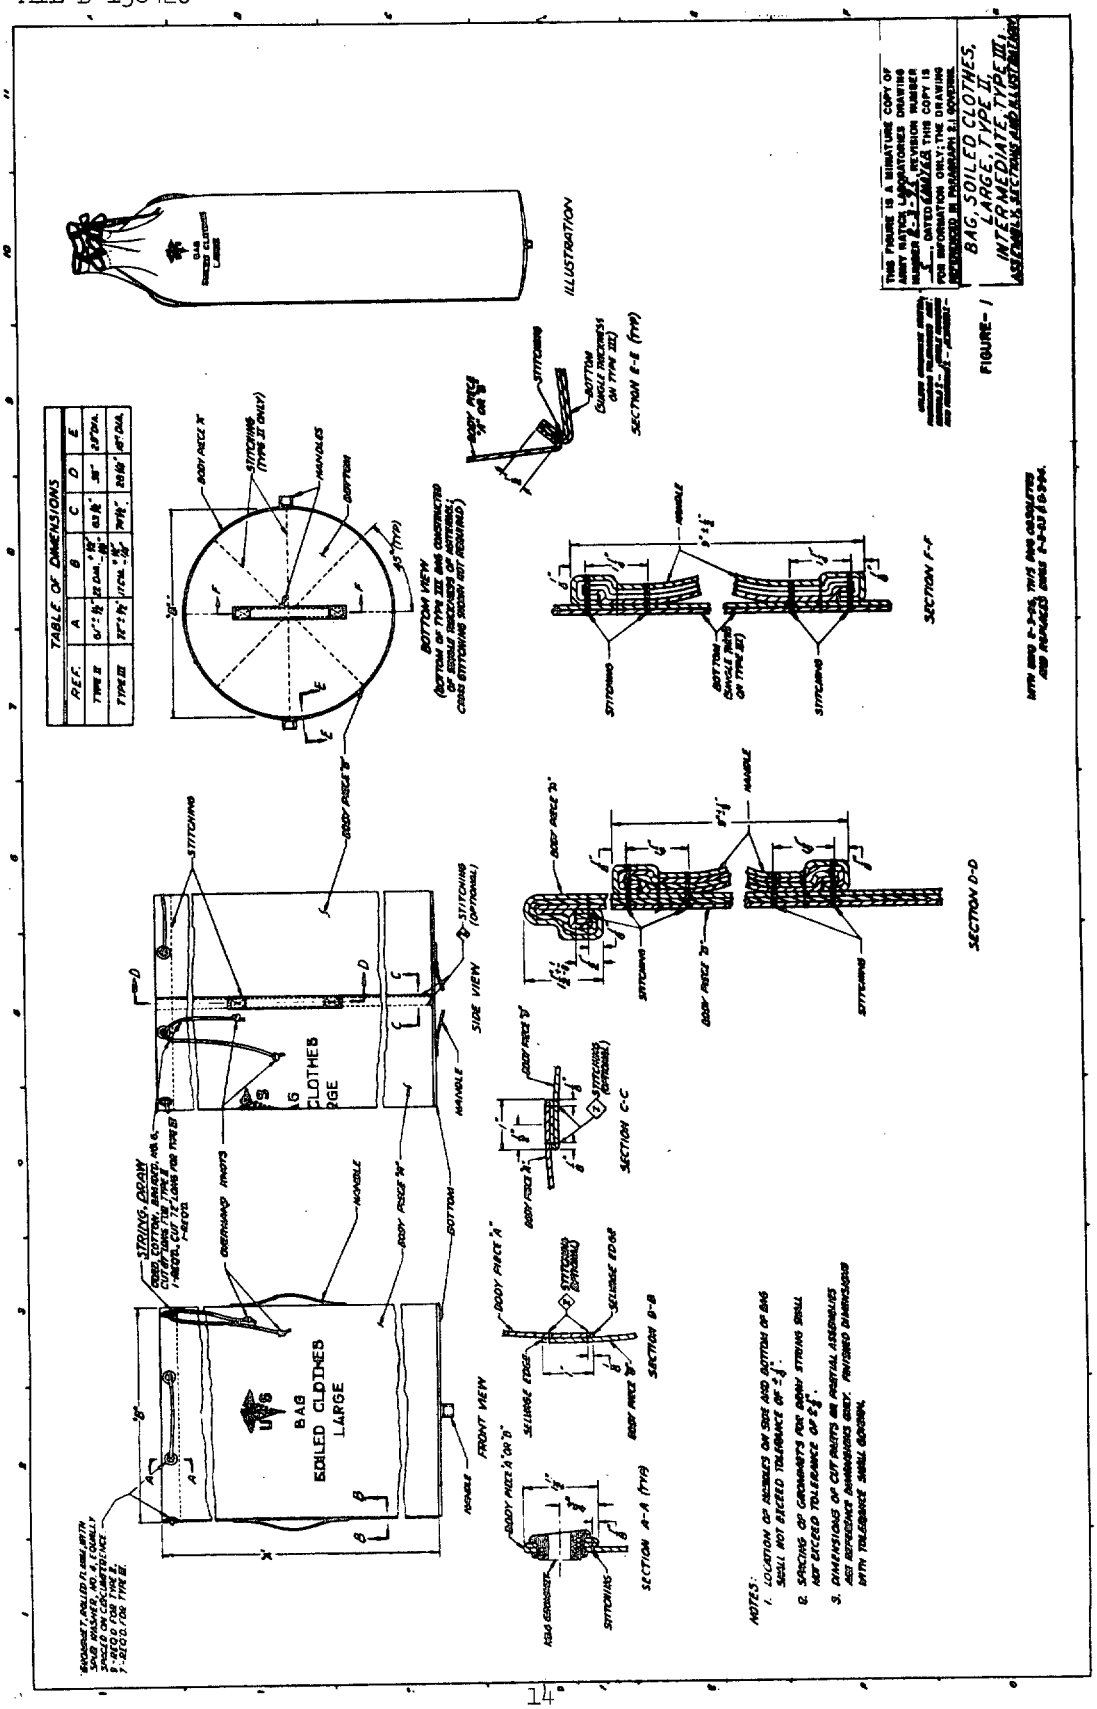

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:28Z
Check the source to verify that this is the current version before use.

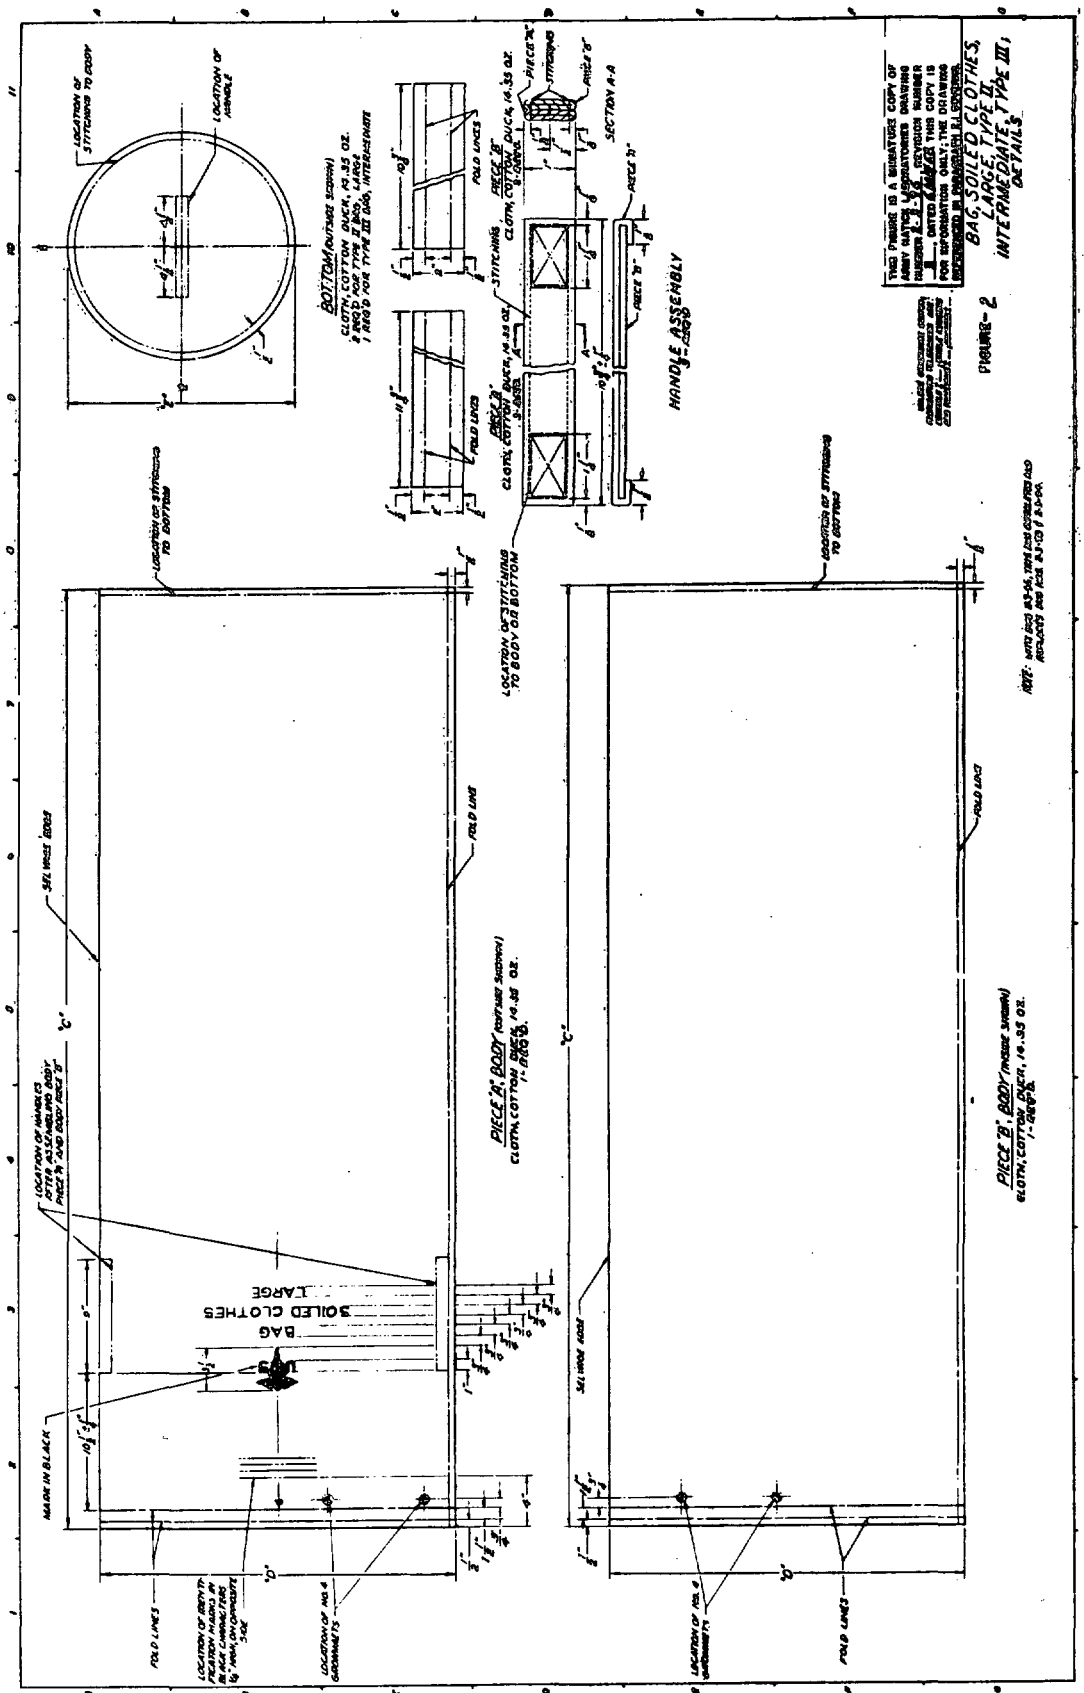

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:28Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

BAGS, SOILED CLOTHES, MIL-B-13842C

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

   ☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:28Z
Check the source to verify that this is the current version before use.