MIL-H-13837B(ME)
9 February 1971
SUPERSEDING
MIL-H-13837A(MO)
3 December 1965

MILITARY SPECIFICATION

HOOK, HOIST, BURTON-STYLE

1. SCOPE

1.1 This specification covers a forged-steel, burton-style, hoist hook.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

PPP-B-601	- Boxes, Wood, Cleated-Plywood.

Military

MIL-P-116	- Preservation, Methods of.

STANDARDS

Military

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of U. S. Military Property.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

FSC 4030

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:28Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Tariff Publishing Officer, Room 202, Union Station, 516 West Jackson Boulevard, Chicago, Illinois 60606.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., ATTN: Tariff Order Section, 1616 P Street NW, Washington, D. C. 20036.)

3. REQUIREMENTS

3.1 Description. The hook shall be as shown in figure 1.

3.2 First article.

3.2.1 Preproduction model. The supplier shall furnish a hook for examination and test within the time frame specified to prove, prior to starting production, that his production methods will produce hooks that comply with the requirements of this specification. Examination and tests shall be as specified in section 4 and shall be subject to surveillance and approval by the Government (see 6.3).

3.3 Material. Material shall be as specified herein.

3.3.1 Steel. Steel shall be carbon or alloy, having a minimum tensile strength of 60,000 pounds per square inch (psi) and a minimum yield strength of 35,000 psi. Steel shall be manufactured by the open-hearth or electric-furnace process.

3.4 Strength. The hook shall sustain a proof load of 6,000 pounds without permanent set or deformation, and a minimum ultimate strength load of 14,000 pounds without disengagement of the load by straightening of the hook.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:28Z
Check the source to verify that this is the current version before use.

3.5 Identification markings. The hook shall be identified in accordance with MIL-STD-130.

3.6 Workmanship. The hook shall be clean and free from cracks and sand, dirt, fins, pits, scale, and other harmful extraneous material. All edges shall be rounded or chamfered.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection. Inspection shall be classified as follows:

(a) Preproduction inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).
(c) Inspection of preparation for delivery (see 4.6).

4.3 Preproduction inspection.

4.3.1 Examination. The preproduction hook shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.3.2 Tests. The preproduction hook shall be tested as specified in 4.5.2.2 and 4.5.2.3. Failure of any test shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Sampling. Sampling for examination and tests shall be in accordance with MIL-STD-105.

4.4.2 Examination. Samples selected in accordance with 4.4.1 shall be examined as specified in 4.5.1. AQL shall be 1.5 percent defective.

4.4.3 Tests. Samples selected in accordance with 4.4.1 shall be tested as specified in 4.5.2.2 and 4.5.2.3. AQL shall be 4.0 percent defective.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:28Z
Check the source to verify that this is the current version before use.

4.5 Inspection procedure.

4.5.1 Examination. The hooks shall be examined for the following defects:

101. Dimensions not as specified.
102. Failure to conform to functional shape requirements.
103. Marking missing or illegible.
104. Workmanship not as specified.

4.5.2 Tests.

4.5.2.1 Test conditions. Tests shall be performed at the climatic conditions existing at the place of test. Strength tests specified in 4.5.2.2 and 4.5.2.3 shall be made on a tensile testing machine. Hooks shall be mounted with a 1-1/8-inch pin through the eye and a 1-1/8-inch pin seated in the curve of the hook. Attachment of the pins to the heads of the machine shall permit the hook to straighten and disengage. The load shall be applied at a uniform rate of 12 inches per minute.

4.5.2.2 Proof load. With the hook positioned in the testing machine as specified in 4.5.2.1, steadily apply a load until the proof load specified in 3.4 is reached. Nonconformance to 3.4 shall constitute failure of this test.

4.5.2.3 Ultimate strength. After completion of the proof load test specified in 4.5.2.2, one hook from each lot shall be tested to ultimate strength by steadily continuing to apply load to the hook until the ultimate load specified in 3.4 is reached. Nonconformance to 3.4 shall constitute failure of this test.

4.6 Inspection of preparation for delivery.

4.6.1 Quality conformance inspection of pack.

4.6.1.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.6.1.2 Sampling for examination. Sampling for examination shall be in accordance with MIL-STD-105.

4.6.1.3 Examination. Samples selected in accordance with 4.6.1.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:28Z
Check the source to verify that this is the current version before use.

105. Materials or containers not as specified. Each incorrect material or container shall constitute one defect.
106. Skids not provided for boxes with a gross weight exceeding 250 pounds for level A or B.
107. Hooks not coated with preservative as specified.
108. Marking illegible, incorrect, incomplete or missing.

5. PREPARATION FOR DELIVERY

5.1 Preservation. Preservation shall be level A or C as specified.

5.1.1 Level A. Each hook shall be cleaned, dried, and preserved in accordance with MIL-P-116, method I, by applying type P-1 preservative.

5.1.2 Level C. Hooks shall be preserved to afford protection against deterioration and damage during shipment from the supplier to the initial destination.

5.2 Packing. Packing shall be level A, B, or C as specified.

5.2.1 Level A. The hooks, preserved as specified in 5.1, shall be packed in close-fitting boxes conforming to PPP-B-601, overseas type, style optional. Strapping shall be zinc coated. Contents shall be blocked, braced, and cushioned as required to prevent damage to the shipping container.

5.2.2 Level B. Hooks shall be packed in the manner specified for level A, except that the boxes shall be domestic type and strapping need not be zinc coated.

5.2.3 Level C. The hooks shall be packed to assure carrier acceptance and safe delivery to destination at lowest rates in compliance with Uniform Freight Classification rules, or National Motor Freight Classification rules.

5.3 Marking. Marking shall be in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The burton-style hoist hook is intended for use in rapid handling of hatch cover beams, pipe, and similar items.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Time frame required for submission of preproduction model (see 3.2.1).
(c) Level of preservation and level of packing required (see 5.1 and 5.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:28Z
Check the source to verify that this is the current version before use.


6.3 Preproduction model. Any changes or deviations of production hooks from the approved preproduction model during production will be subject to the approval of the contracting officer. Approval of the preproduction model will not relieve the supplier of his obligation to furnish hooks conforming to this specification.

Custodian:
Army - ME

Preparing activity:
Army - ME

Project No. 4030-A017

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:28Z
Check the source to verify that this is the current version before use.

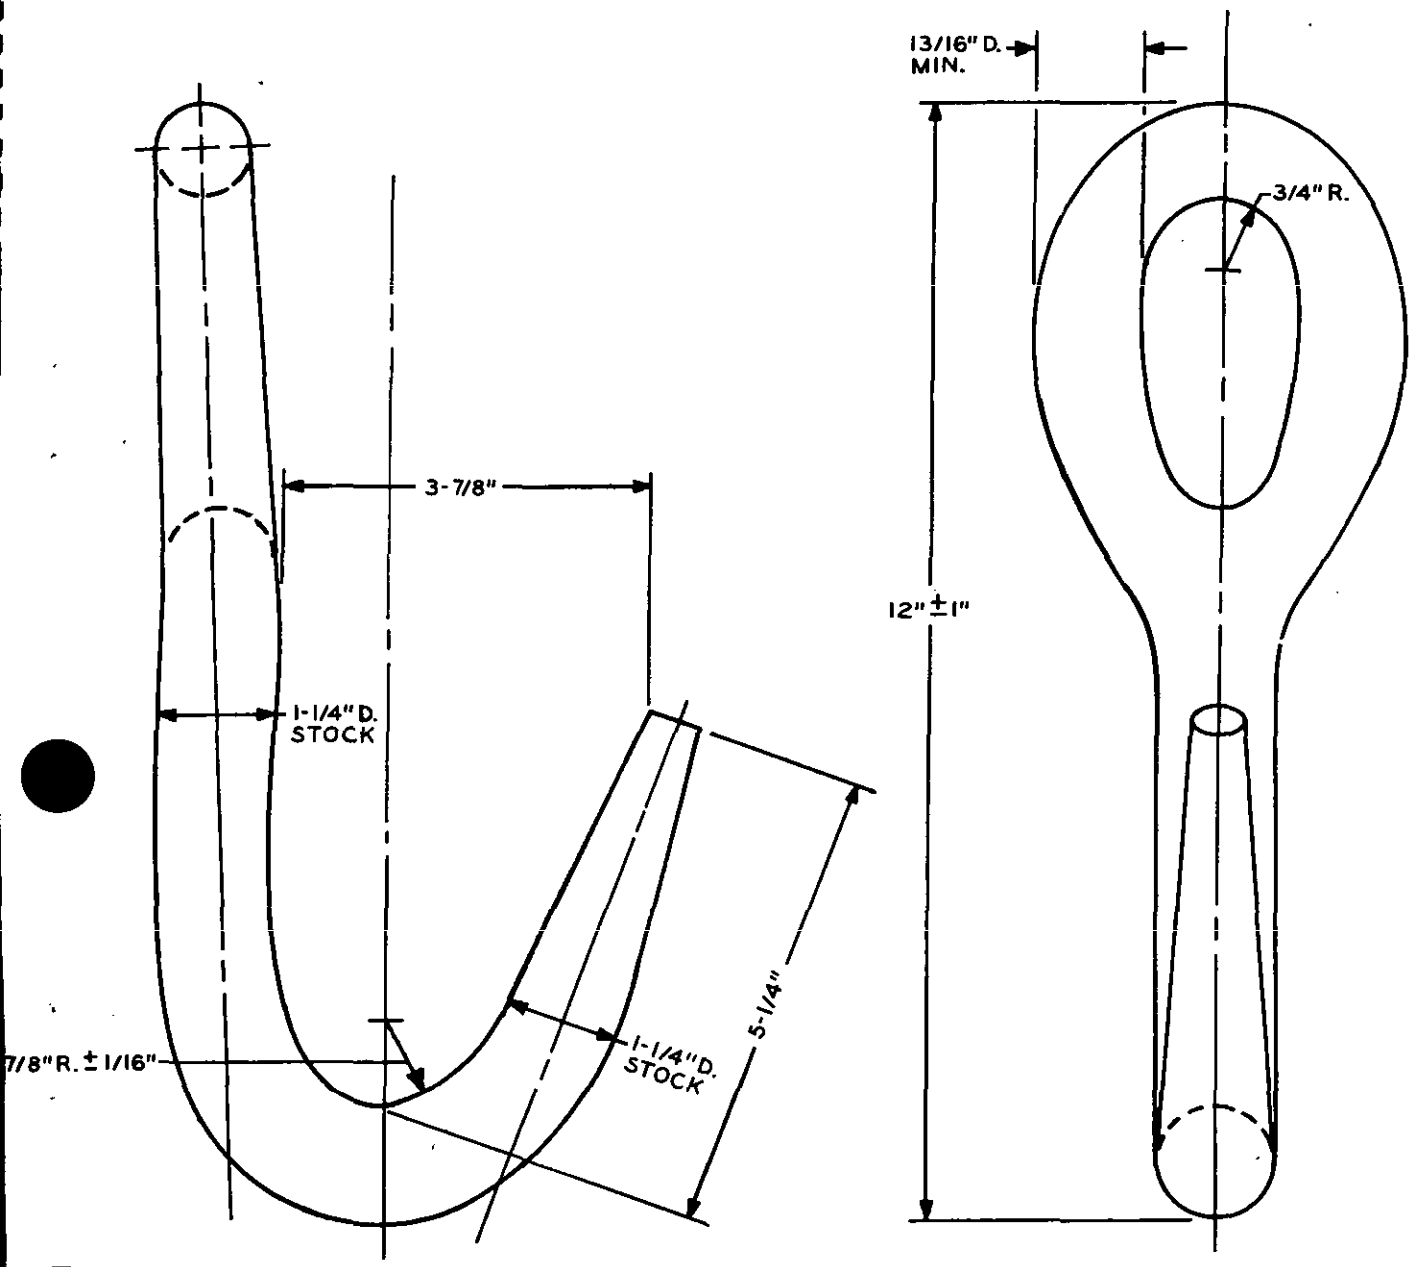

NOTE:
ALL TOLERANCES ± 1/8" UNLESS OTHERWISE NOTED

FIGURE 1, HOOK, HOIST, BURTON STYLE

X 345

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:28Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

MIL-H-13837B(ME) Hook, Hoist, Burton-Style

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:28Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US Army Mobility Equipment Research and
Development Center
ATTN: DRXFB-DS
Fort Belvoir, VA 22060

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:28Z
Check the source to verify that this is the current version before use.