MIL-R-13873(Ord)
23 December 1954
SUPERSEDING
Army 49-6
8 October 1938

MILITARY SPECIFICATION

REEL, WIRE, FIRING
MODEL 1942

1. SCOPE

1.1 This specification covers Model 1942 Firing Wire Reel for use in demolition purposes.

2. APPLICABLE DOCUMENTS

2.1 The following specifications, standards, drawings and publications, and specifications and drawings referenced thereon, of the issue in effect on date of invitation for bids, form a part of this specification:

SPECIFICATIONS

FEDERAL

FF-N-101	-Nails; Spikes; Staples; and Tacks
UU-T-116	-Tape; Paper, Gummed, Water-Resistant
QQ-W-414	-Wire, Steel; Bookbinders'

MILITARY

MIL-A-101	-Adhesive, Water-Resistant, For Sealing Fiberboard Boxes
JAN-P-106	-Packaging And Packing For Overseas Shipment-Boxes; Wood, Nailed
JAN-P-108	-Packaging And Packing For Overseas Shipment-Boxes, Fiberboard (V-Board And W-Board), Exterior And Interior
MIL-G-2550	-General Specification For Ammunition Except Small Arms Ammunition

STANDARDS

MILITARY

MIL-STD-129	-Marking For Shipment And Storage

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:31Z
Check the source to verify that this is the current version before use.

DRAWINGS

ORDNANCE CORPS

P-84755 -Reel, Wire, Firing, Model 1942. Assembly

PUBLICATIONS

U. S. ARMY TECHNICAL MANUAL

TM 38-230 -Preservation Packaging, and Packing of Military Supplies and Equipment

ORDNANCE CORPS

PA-SIP-M6-J-Reel, Wiring, Firing Model 1942

(Copies of specifications, drawings, standards and publications required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Material.-The material and parts shall be in accordance with applicable drawings and specifications.

3.2 The reel shall comply with all requirements specified on Drawing P-84755 and all drawings referenced thereon, and with all requirements specified in applicable specifications.

3.3 Workmanship.-All parts shall be free of chips, dirt, grease, rust, and other foreign material. The cleaning method used shall not be injurious to any of the parts nor shall the parts be contaminated by the cleaning agents used.

4. QUALITY ASSURANCE PROVISIONS

4.1 Lot.-A lot shall consist of all firing wire reels assembled by one manufacturer in one unchanged process in accordance with the same drawing, same drawing revision, same specification, and same specification revision.

4.2 Inspection.-Inspection shall be as specified in Specification MIL-G-2550 and Standard Inspection Procedure PA-SIP-M6-J.

4.3 Tests.-There are no tests applicable to this specification.

5. PREPARATION FOR DELIVERY

5.1 Packaging.

5.1.1 Inner packaging.-The two handles of the reel shall be packaged in an interior carton. The carton shall be Style RSC, W5S or W6S fiberboard, having side dimensions of 12 1/4 by 5 1/2 by 2 1/2 inches in accordance with Specification JAN-P-108. The two reel handles shall be packed, one on top of the other, with a filler, W5S or W6S fiberboard, complying with Specification JAN-P-108, between handles. To insure tight packing, additional fillers shall be added. Top and bottom, inner and outer flaps, shall be secured with water-resistant adhesive complying with Specification MIL-A-101.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:31Z
Check the source to verify that this is the current version before use.

5.1.2 Outer packaging.-The two handles of the reel packed as specified in 5.1.1, and the reel shall be packaged in an outer carton. The carton shall be Style RSC, V3S fiberboard, having inside dimensions of 12 3/8 by 12 1/8 by 9 3/4 inches in accordance with Specification JAN-P-108. The reel and carton shall be packed as follows using the interior dunnage specified on figure 1. The bottom support shall be inserted, legs up, in the carton. The interior carton shall be placed between the flanges of the reel and the reel shall be inserted, crank handle up, in the carton so that the axle bearing piece is parallel between legs of the bottom support. The positioning support shall be inserted between interior carton and carton. The top support shall be positioned over the crank handle. Fillers, W5S or W6S fiberboard, complying with Specification JAN-P-108, shall be added on top of contents as required, to insure tight packing. Top and bottom, inner and outer flaps, shall be secured with water-resistant gummed paper tape complying with Specification UU-T-116 as shown in figure 4-10, Section IV of U. S. Army Technical Manual TM 38-230.

5.2 Packing.-Two cartons packed as specified in 5.1.2, shall be overpacked with a wooden box complying with Style 4 of Specification JAN-P-106. The box shall be closed and strapped in accordance with Appendix I of Specification JAN-P-106.

5.3 Marking.-Marking shall be as specified in Standard MIL-STD-129.

5.4 Data cards.-Data card information shall be as specified in Specification MIL-G-2550.


6. NOTES

6.1 Ordering data.-Procurement documents should specify the title, number and date of this specification.


NOTICE.-This specification, together with specifications and drawings pertaining to it and bearing a "Notice " of similar restrictions, is intended for use only in connection with procurement by the United States Government, and shall not be reproduced either wholly or in part except when authorized in connection with Government procurement, nor be used for any other purpose except when specifically authorized by the Chief of Ordnance.

Custodian:
Army-Ordnance Corps


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:31Z
Check the source to verify that this is the current version before use.

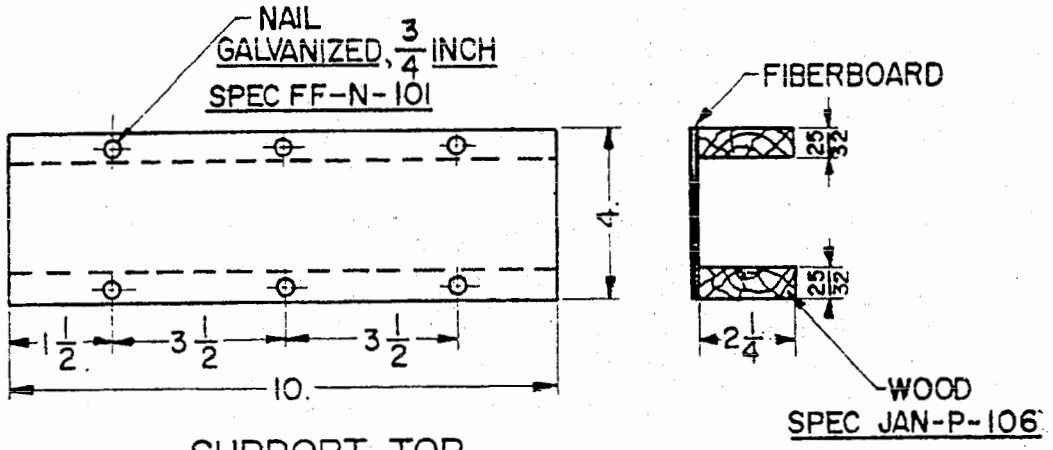

SUPPORT, TOP
FIBERBOARD, W5S OR W6S
SPEC JAN-P-108

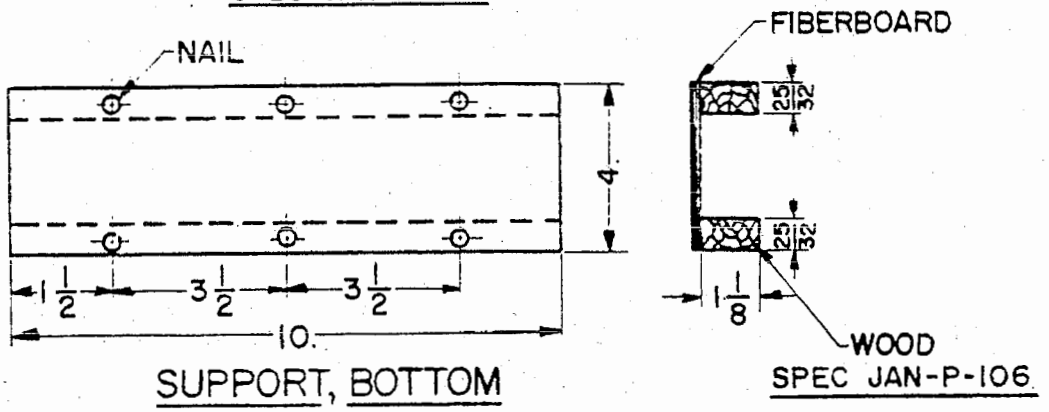

SUPPORT, BOTTOM
FIBERBOARD, W5S OR W6S
SPEC JAN-P-108

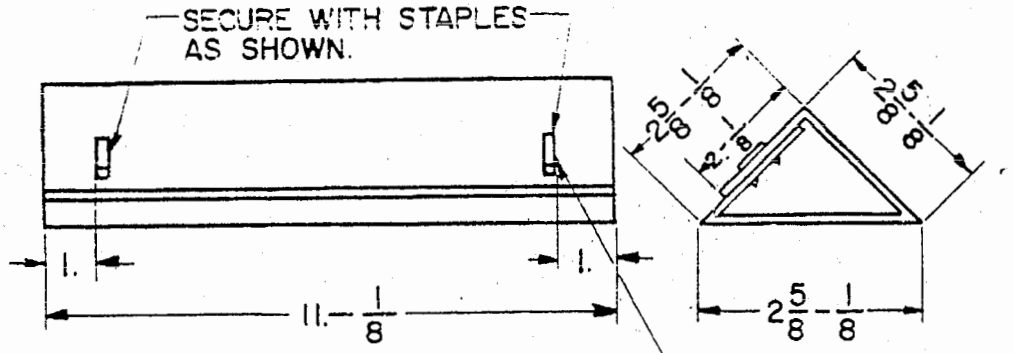

SUPPORT, POSITIONING
FIBERBOARD, W5S OR W6S
SPEC JAN-P-108

FIGURE I

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:31Z
Check the source to verify that this is the current version before use.