The documentation and process conversion measures necessary to comply with this revision shall be completed by 8 April 2016.

INCH-POUND

MIL-PRF-19500/501F
8 January 2016
SUPERSEDING
MIL-PRF-19500/501E
4 September 2013

PERFORMANCE SPECIFICATION SHEET

* TRANSISTOR, DARLINGTON, PNP, SILICON, POWER,
ENCAPSULATED (THROUGH-HOLE MOUNT PACKAGE),
TYPES 2N6051 AND 2N6052,
QUALITY LEVELS JAN, JANTX, AND JANTXV

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-19500.

1. SCOPE

* 1.1 Scope. This specification covers the performance requirements for PNP, Darlington, silicon, power transistors. Three levels of product assurance (JAN, JANTX, and JANTXV) are provided for each encapsulated device.

* 1.2 Package outlines. The device package outlines are as follows: TO-3 in accordance with figure 1 for all encapsulated device types.

1.3 Maximum ratings. Unless otherwise specified, $T_C$ = +25°C.

| Type | $P_T$ (1) $T_C$ = +25°C | $P_T$ (1) $T_C$ = +100°C | $R_{\theta JC}$ | $V_{CBO}$ | $V_{CEO}$ | $V_{EBO}$ | $I_C$ | $I_B$ | $T_J$ and $T_{STG}$ |
|---|---|---|---|---|---|---|---|---|---|
| | W | W | °C/W | V dc | V dc | V dc | A dc | A dc | °C |
| 2N6051 | 150 | 75 | 1.0 | -80 | -80 | -5 | -12 | -0.2 | -55 to +175 |
| 2N6052 | 150 | 75 | 1.0 | -100 | -100 | -5 | -12 | -0.2 | -55 to +175 |

(1) Derate linearly at 1.00 W/°C above $T_C$ > +25°C (see figure 2).

Comments, suggestions, or questions on this document should be addressed to DLA Land and Maritime, ATTN: VAC, P.O. Box 3990, Columbus, OH 43218-3990, or emailed to Semiconductor@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil/.

AMSC N/A

FSC 5961

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:29Z
Check the source to verify that this is the current version before use.

1.4 Primary electrical characteristics. Unless otherwise specified, $T_C$ = +25°C.

| Limit | $h_{FE2}$ (1) $V_{CE}$ = -3 V dc $I_C$ = -6 A dc | $h_{FE3}$ (1) $V_{CE}$ = -3 V dc $I_C$ = -12 A dc | $h_{fe}$ $V_{CE}$ = -3 V dc $I_C$ = -5 A dc f = 1 kHz | $\lvert h_{fe} \rvert$ $V_{CE}$ = -3 V dc $I_C$ = -5 A dc f = 1 MHz | $C_{obo}$ 100 kHz ≤ f ≤ 1 MHz $V_{CB}$ = -10 V dc $I_E$ = 0 | Pulse response | |
|---|---|---|---|---|---|---|---|
| | | | | | | $t_{on}$ | $t_{off}$ |
| | | | | | pF | µs | µs |
| Min | 1,000 | 150 | | 10 | | | |
| Max | 18,000 | | 1,000 | 250 | 300 | 2 | 10 |

| Limit | $V_{BE(sat)}$ $I_C$ = -12 A dc $I_B$ = -120 mA dc (1) | $V_{CE(sat)1}$ $I_C$ = -12 A dc $I_B$ = -120 mA dc (1) | $V_{CE(sat)2}$ $I_C$ = -6 A dc $I_B$ = -24 mA dc (1) |
|---|---|---|---|
| | V dc | V dc | V dc |
| Min | | | |
| Max | -4.0 | -3.0 | -2.0 |

(1) Pulsed see 4.5.1.

* 1.5 Part or Identifying Number (PIN). The PIN is in accordance with MIL-PRF-19500, and as specified herein. See 6.4 for PIN construction example and 6.5 for a list of available PINs.

* 1.5.1 JAN certification mark and quality level for encapsulated devices. The quality level designators for encapsulated devices that are applicable for this specification sheet from the lowest to the highest level are as follows: “JAN”, “JANTX”, and “JANTXV”.

* 1.5.2 Device type. The designation system for the device types of transistors covered by this specification sheet are as follows.

* 1.5.2.1 First number and first letter symbols. The transistors of this specification sheet use the first number and letter symbols "2N".

* 1.5.2.2 Second number symbols. The second number symbols for the transistors covered by this specification sheet are as follows: "6051" and "6052".

* 1.5.3 Lead finish. The lead finishes applicable to this specification sheet are listed on QPDSIS-19500.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:29Z
Check the source to verify that this is the current version before use.

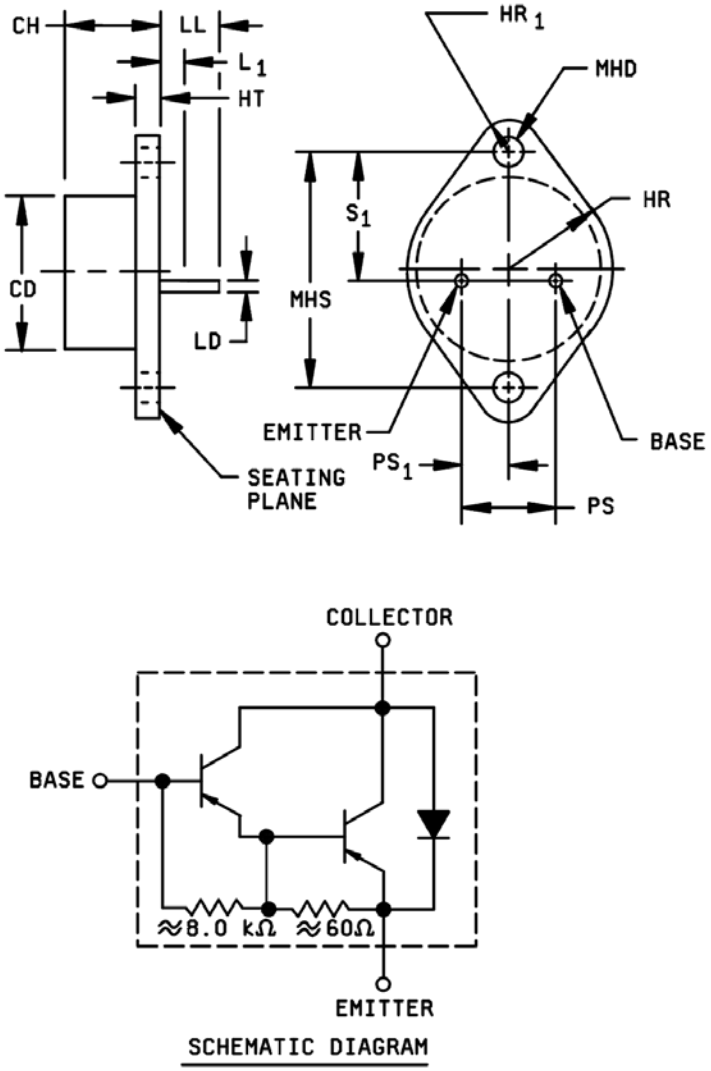



FIGURE 1. Physical dimensions (TO-3) and schematic circuit.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:29Z
Check the source to verify that this is the current version before use.

| Ltr | Dimensions | | | | Notes |
|---|---|---|---|---|---|
| | Inches | | Millimeters | | |
| | Min | Max | Min | Max | |
| CD | | .875 | | 22.23 | 3 |
| CH | .250 | .328 | 6.35 | 8.33 | |
| HR | .495 | .525 | 12.57 | 13.34 | |
| $HR_1$ | .131 | .188 | 3.33 | 4.78 | 6 |
| HT | .060 | .135 | 1.52 | 3.43 | |
| LD | .038 | .043 | 0.97 | 1.09 | 4, 5, 9 |
| LL | .312 | .500 | 7.92 | 12.70 | 4, 5, 9 |
| $L_1$ | | .050 | | 1.27 | 5, 9 |
| MHD | .151 | .161 | 3.84 | 4.09 | 7 |
| MHS | 1.177 | 1.197 | 29.90 | 30.40 | |
| PS | .420 | .440 | 10.67 | 11.18 | |
| $PS_1$ | .205 | .225 | 5.21 | 5.72 | 5 |
| $S_1$ | .655 | .675 | 16.64 | 17.15 | |

NOTES:
1. Dimensions are in inches.
2. Millimeters are given for general information only.
3. Body contour is optional within zone defined by CD.
4. These dimensions shall be measured at points .050 inch (1.27 mm) to .055 inch (1.40 mm) below seating plane. When gauge is not used, measurement shall be made at seating plane.
5. Both terminals.
6. At both ends.
7. Two holes.
8. The collector shall be electrically connected to the case.
9. LD applies between $L_1$ and LL. Lead diameter shall not exceed twice LD within $L_1$.
10. The seating plane of the header shall be flat within .001 inch (0.03 mm), concave to .004 inch (0.10 mm), convex inside a .930 inch (23.62 mm) diameter circle on the center of the header, and flat within .001 inch (0.03 mm) concave to .006 inch (0.15 mm), convex overall.
11. In accordance with ASME Y14.5M, diameters are equivalent to $\phi$x symbology.

FIGURE 1. Physical dimensions (TO-3) and schematic circuit - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:29Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

* 2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-19500 - Semiconductor Devices, General Specification for.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-750 - Test Methods for Semiconductor Devices.

* (Copies of these documents are available online at http://quicksearch.dla.mil/).

2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 General. The individual item requirements shall be as specified in MIL-PRF-19500 and as modified herein.

3.2 Qualification. Devices furnished under this specification shall be products that are manufactured by a manufacturer authorized by the qualifying activity for listing on the applicable qualified manufacturer's list (QML) before contract award (see 4.2 and 6.3).

3.3 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500.

3.4 Interface and physical dimensions. The interface and physical dimensions shall be as specified in MIL-PRF-19500 and on figure 1 herein.

3.4.1 Lead finish. Lead finish shall be solderable in accordance with MIL-PRF-19500, MIL-STD-750, and herein. Where a choice of lead finish is desired, it shall be specified in the acquisition document (see 6.2).

3.5 Marking. Marking shall be in accordance with MIL-PRF-19500.

3.6 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in paragraph 1.3, 1.4, and table I.

3.7 Electrical test requirements. The electrical test requirements shall be as specified in table I.

3.8 Workmanship. Semiconductor devices shall be processed in such a manner as to be uniform in quality and shall be free from other defects that will affect life, serviceability, or appearance.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:29Z
Check the source to verify that this is the current version before use.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3).

c. Conformance inspection (see 4.4 and table I and II).

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500 and as specified herein.

4.2.1 Group E qualification. Group E inspection shall be performed for qualification or re-qualification only. In case qualification was awarded to a prior revision of the specification sheet that did not request the performance of table III tests, the tests specified in table III herein that were not performed in the prior revision shall be performed on the first inspection lot of this revision to maintain qualification.

4.3 Screening (JANTX and JANTXV levels). Screening shall be in accordance with table E-IV of MIL-PRF-19500, and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

| Screen (see table E-IV of MIL-PRF-19500) | Measurement |
|---|---|
| | JANTX and JANTXV levels only |
| (1) 3c | Thermal impedance (see 4.3.2). |
| 9 | $I_{CEX1}$ |
| 11 | $I_{CEX1}$, $h_{FE2}$.<br>Subgroup 2 of table I herein;<br>$\Delta I_{CEX1}$ = 100 percent of initial value or -2 μA dc, whichever is greater. |
| 12 | See 4.3.1. |
| 13 | Subgroup 2 of table I herein;<br>$\Delta I_{CEX1}$ = 100 percent of initial value or- 2 μA dc, whichever is greater;<br>$\Delta h_{FE2}$ = ±40 percent of initial value. |

(1) Shall be performed anytime after temperature cycling, screen 3a; and does not need to be repeated in screening requirements.

4.3.1 Power burn-in conditions. Power burn-in conditions are as follows:

$T_J$ = +162.5°C ±12.5°C; $V_{CE} \geq$ -10 V dc, $T_A \leq$ +100°C.

NOTE: No heat sink or forced air cooling on the devices shall be permitted.

* 4.3.2 Thermal impedance. The thermal impedance measurements shall be performed in accordance with method 3131 of MIL-STD-750 using the guidelines in that method for determining $I_M$, $I_H$, $t_H$, $t_{SW}$, (and $V_H$ where appropriate). See table III, group E, subgroup 4 herein.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:29Z
Check the source to verify that this is the current version before use.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with table E-V of MIL-PRF-19500, and table I herein. Electrical measurements (end-points) shall be in accordance with table I, subgroup 2 herein.

* 4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-VIB (JAN, JANTX and JANTXV) of MIL-PRF-19500 and as follows. Delta measurements shall be in accordance with table II herein.

* 4.4.2.1 Quality levels JAN, JANTX and JANTXV, table E-VIB of MIL-PRF-19500.

| Subgroup | Method | Conditions |
|---|---|---|
| * B3 | 1037 | $V_{CB} \geq$ -10 V dc; $\Delta T_J$ = between cycles $\geq$ +100°C. $t_{on} = t_{off}$ = 3 minutes. No heat sink or forced-air cooling on the devices shall be permitted. |
| B5 | | Not applicable. |

* 4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-VII of MIL-PRF-19500 and as follows. Delta measurements shall be in accordance with table II herein.

| Subgroup | Method | Conditions |
|---|---|---|
| * C2 | 2036 | Test condition A, weight = 10 pounds (4.5 kg), t = 15 s. |
| C5 | 3131 | See 4.3.2, $R_{\theta JC}$ = 1°C/W. |
| * C6 | 1037 | $V_{CB} \geq$ -10 V dc, $\Delta T_J$ between cycles $\geq$ +100°C, $t_{on} = t_{off}$ = 3 minutes. No heat sink or forced-air cooling on the devices shall be permitted. |

* 4.4.4 Group E inspection. Group E inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-IX of MIL-PRF-19500 and as specified herein. Delta measurements shall be in accordance with table II herein and applies to subgroup E1 and E2.

4.5 Method of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows.

4.5.1 Pulse measurements. Conditions for pulse measurement shall be as specified in section 4 of MIL-STD-750.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:29Z
Check the source to verify that this is the current version before use.

* TABLE I. Group A inspection.

| Inspection 1/ | MIL-STD-750 | | Symbol | Limit | | Unit |
|---|---|---|---|---|---|---|
| | Method | Conditions | | Min | Max | |
| Subgroup 1 | | | | | | |
| Visual and mechanical examination | 2071 | | | | | |
| Subgroup 2 | | | | | | |
| Thermal impedance 2/ | 3131 | See 4.3.2 | $Z_{\theta JX}$ | | | °C/W |
| Breakdown voltage collector to emitter | 3011 | Bias condition D; $I_C$ = -100 mA dc, pulsed (see 4.5.1) | $V_{(BR)CEO}$ | | | |
| 2N6051 | | | | -80 | | V dc |
| 2N6052 | | | | -100 | | V dc |
| Collector to emitter cutoff current | 3041 | Bias condition A; $V_{BE}$ = +1.5 V dc | $I_{CEX1}$ | | | |
| 2N6051 | | $V_{CE}$ = -80 V dc | | | -.01 | mA dc |
| 2N6052 | | $V_{CE}$ = -100 V dc | | | -.01 | mA dc |
| Collector to emitter cutoff current | 3041 | Bias condition D | $I_{CEO}$ | | -1 | mA dc |
| 2N6051 | | $V_{CE}$ = -40 V dc | | | | |
| 2N6052 | | $V_{CE}$ = -50 V dc | | | | |
| Emitter to base cutoff current | 3061 | Bias condition D; $V_{BE}$ = -5 V dc, | $I_{EBO}$ | | -2 | mA dc |
| Base to emitter non-saturated | 3066 | Test condition B; $I_C$ = -6 A dc, $V_{CE}$ = -3 V dc, pulsed (see 4.5.1) | $V_{BE}$ | | -2.8 | V dc |
| Base to emitter saturated | 3066 | Test condition A; $I_C$ = -12 A dc, $I_B$ = -120 mA dc, pulsed (see 4.5.1) | $V_{BE(sat)}$ | | -4.0 | V dc |
| Collector to emitter saturated voltage | 3071 | $I_C$ = -12 A dc; $I_B$ = -120 mA dc pulsed (see 4.5.1) | $V_{CE(sat)1}$ | | -3.0 | V dc |
| Collector to emitter saturated voltage | 3071 | $I_C$ = -6 A dc; $I_B$ = -24 mA dc, pulsed (see 4.5.1) | $V_{CE(sat)2}$ | | -2.0 | V dc |
| Forward current transfer ratio | 3076 | $V_{CE}$ = -3 V dc; $I_C$ = -1 A dc, pulsed (see 4.5.1) | $h_{FE1}$ | 1,000 | | |
| Forward current transfer ratio | 3076 | $V_{CE}$ = -3 V dc; $I_C$ = -6 A dc, pulsed (see 4.5.1) | $h_{FE2}$ | 1,000 | 18,000 | |
| Forward current transfer ratio | 3076 | $V_{CE}$ = -3 V dc; $I_C$ = -12 A dc, pulsed (see 4.5.1) | $h_{FE3}$ | 150 | | |

See footnotes at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:29Z
Check the source to verify that this is the current version before use.

* TABLE I. Group A inspection - Continued.

| Inspection 1/ | MIL-STD-750 | | Symbol | Limits | | Unit |
|---|---|---|---|---|---|---|
| | Method | Conditions | | Min | Max | |
| Subgroup 3 | | | | | | |
| High temperature operation: | | $T_A$ = +150°C | | | | |
| Collector to emitter cutoff current | 3041 | Bias condition A, $V_{BE}$ = +1.5 V dc | $I_{CEX2}$ | | | |
| 2N6051 | | $V_{CE}$ = -80 V dc | | | -5.0 | mA dc |
| 2N6052 | | $V_{CE}$ = -100 V dc | | | -5.0 | mA dc |
| Low temperature operation: | | $T_A$ = -55°C | | | | |
| Forward current transfer ratio | 3076 | $V_{CE}$ = -3 V dc, $I_C$ = -6 A dc, pulsed (see 4.5.1) | $h_{FE4}$ | 300 | | |
| Subgroup 4 | | | | | | |
| Small signal short circuit forward current transfer ratio | 3206 | $V_{CE}$ = -3 V dc; $I_C$ = -5 A dc; f = 1 kHz | $h_{fe}$ | 1,000 | | |
| Magnitude of small-signal short-circuit forward-current transfer ratio | 3306 | $V_{CE}$ = -3 V dc, $I_C$ = -5 A dc, f = 1.0 MHz | $\|h_{fe}\|$ | 10 | 250 | |
| Open circuit output capacitance | 3236 | $V_{CB}$ = -10 V dc; $I_E$ = 0; 100 kHz ≤ f ≤ 1 MHz | $C_{obo}$ | | 300 | pF |
| Pulse response | | See figure 3 | | | | |
| Turn-on time | | $V_{CC}$ = -30 V dc, $I_C$ = -5 A dc, $I_{B1}$ = -20 mA dc | $t_{on}$ | | 2.0 | µs |
| Turn-off time | | $V_{CC}$ = -30 V dc, $I_C$ = -5 A dc, $I_{B1}$ = $I_{B2}$, = -20 mA dc | $t_{off}$ | | 10 | µs |

See footnotes at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:29Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

| Inspection 1/ | MIL-STD-750 | | Symbol | Limits | | Unit |
|---|---|---|---|---|---|---|
| | Method | Conditions | | Min | Max | |
| Subgroup 5 | | | | | | |
| Safe operating area (dc) | 3051 | $T_C$ = +25°C +10°C, -0°C, t ≥ 1s, 1 cycle, see figure 4 | | | | |
| Test 1 | | $V_{CE}$ = -12.5 V dc, $I_C$ = -12 A dc | | | | |
| Test 2 | | $V_{CE}$ = -30 V dc, $I_C$ = -5 A dc | | | | |
| Test 3<br>2N6051<br>2N6052 | | <br>$V_{CE}$ = -70 V dc, $I_C$ = -200 mA dc<br>$V_{CE}$ = -90 V dc, $I_C$ = -155 mA dc | | | | |
| Safe operating area (switching) | 3053 | Load condition B, (clamped inductive load), $T_A$ = +25°C, $t_r + t_f \leq 1.0$ µs duty cycle ≤ 2 percent, $t_p$ = 1 ms, (vary to obtain $I_C$), $R_s$ = 0.1 ohms, $R_{BB1}$ = 80 ohms, $V_{BB1}$ = 16 V dc, $R_{BB2}$ = 100 ohms, $V_{BB2}$ = 1.5 V dc, $V_{CC}$ = 20 V dc, $I_C$ = 12 A dc, $R_L \leq 2$ ohms, L = 10 mH (Stancor C-2688 or equivalent); | | | | |
| 2N6051<br>2N6052 | | clamp voltage = -80 +0, -5 V dc,<br>clamp voltage = -100 +0, -5 V dc.<br>Device fails if clamp voltage not reached, see figure 5 | | | | |
| Electrical measurements | | See table I, subgroup 2 | | | | |
| Subgroups 6 & 7 | | | | | | |
| Not applicable | | | | | | |

1/ For sampling plan, see MIL-PRF-19500.
2/ This test required for the following end-point measurements only:
Group B, subgroups 2 and 3 (JAN, JANTX, and JANTXV).
Group C, subgroups 2 and 6.
Group E, subgroup 1.

TABLE II. Groups B, C, and E delta measurements. 1/ 2/ 3/

| Step | Inspection | MIL-STD-750 | | Symbol | Limit | | Unit |
|---|---|---|---|---|---|---|---|
| | | Method | Conditions | | Min | Max | |
| 1 | Forward - current transfer ratio | 3076 | $V_{CE}$ = -3 V dc, $I_C$ = -6 A dc, pulsed (see 4.5.1) | $\Delta h_{FE2}$ | ±40 percent | | |

1/ The delta measurements for table E-VIB (JAN, JANTX, and JANTXV) of MIL-PRF-19500 are subgroups 3 and 6, see table II herein, step 1.
2/ The delta measurements for table E-VII of MIL-PRF-19500 are subgroup 6, see table II herein, step 1.
3/ The delta measurements for table E-IX of MIL-PRF-19500 are subgroup 1 and 2, see table II herein, step 1.




Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:29Z
Check the source to verify that this is the current version before use.

TABLE III. Group E inspection (all quality levels) - for qualification and re-qualification only.

| Inspection | MIL-STD-750 | | Sample plan |
|---|---|---|---|
| | Method | Conditions | |
| Subgroup 1 | | | 45 devices c = 0 |
| Temperature cycling | 1051 | 500 cycles. | |
| Hermetic seal | 1071 | | |
| Fine leak<br>Gross leak | | | |
| Electrical measurements | | See table I, subgroup 2 and table II herein. | |
| Subgroup 2 | | | 45 devices c = 0 |
| Blocking life | 1048 | Test temperature = +125°C; $V_{CB}$ = 80 percent rated; T = 1,000 hours. | |
| Electrical measurements | | See table I, subgroup 2 and table II herein. | |
| Subgroup 4 | | | Sample size N/A |
| Thermal impedance curves | | See MIL-PRF-19500. | |
| Subgroup 8 | | | 45 devices c = 0 |
| Reverse stability | 1033 | Condition B. | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:29Z
Check the source to verify that this is the current version before use.

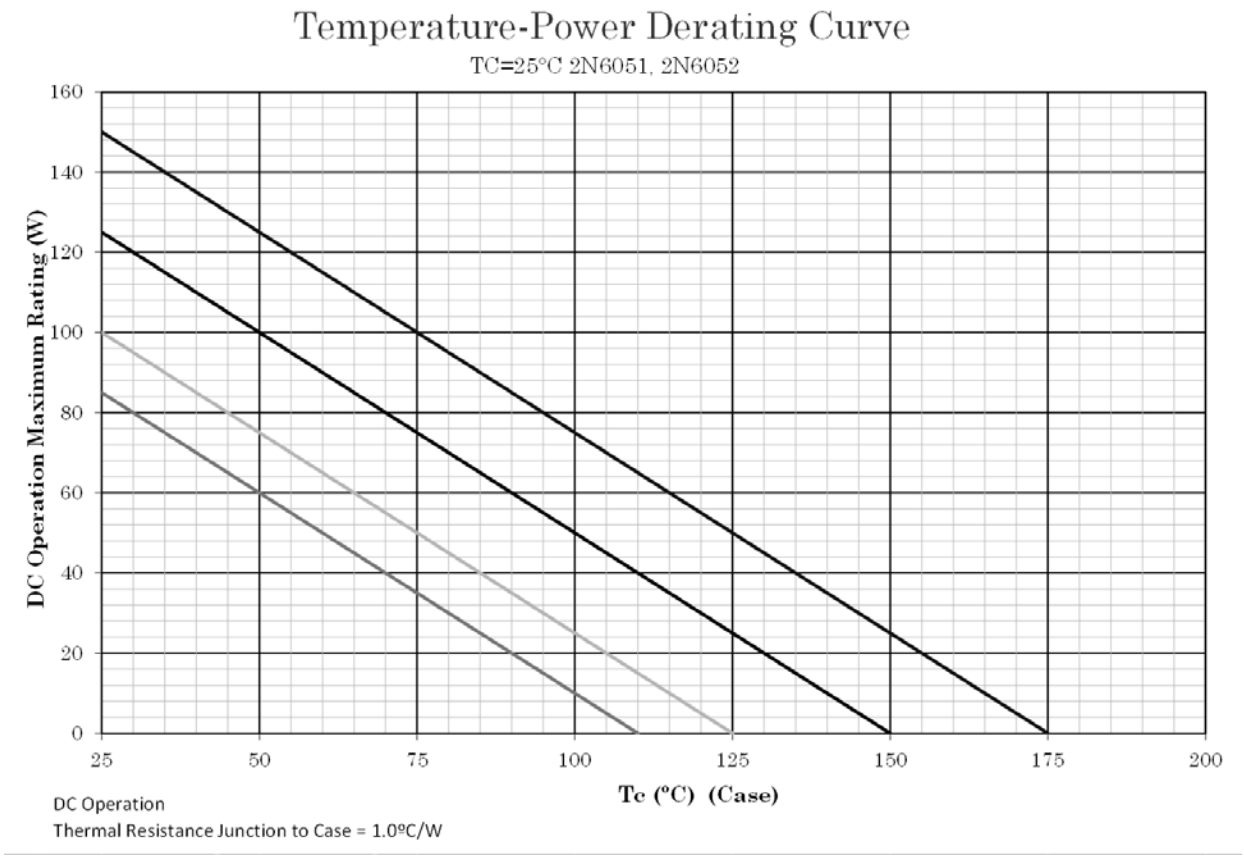



NOTES:

1. This is the true inverse of the worst case thermal resistance value. All devices are capable of operating at $\leq T_J$ specified on this curve. Any parallel line to this curve will intersect the appropriate power for the desired maximum $T_J$ allowed.
2. Derate design curve constrained by the maximum junction temperature ($T_J \leq 175°C$) and power rating specified. (See 1.3 herein.)
3. Derate design curve chosen at $T_J \leq 150°C$, where the maximum temperature of electrical test is performed.
4. Derate design curve chosen at $T_J \leq 125°C$, and 110°C to show power rating where most users want to limit $T_J$ in their application.

FIGURE 2. Temperature-power derating for 2N6051 AND 2N6052.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:29Z
Check the source to verify that this is the current version before use.

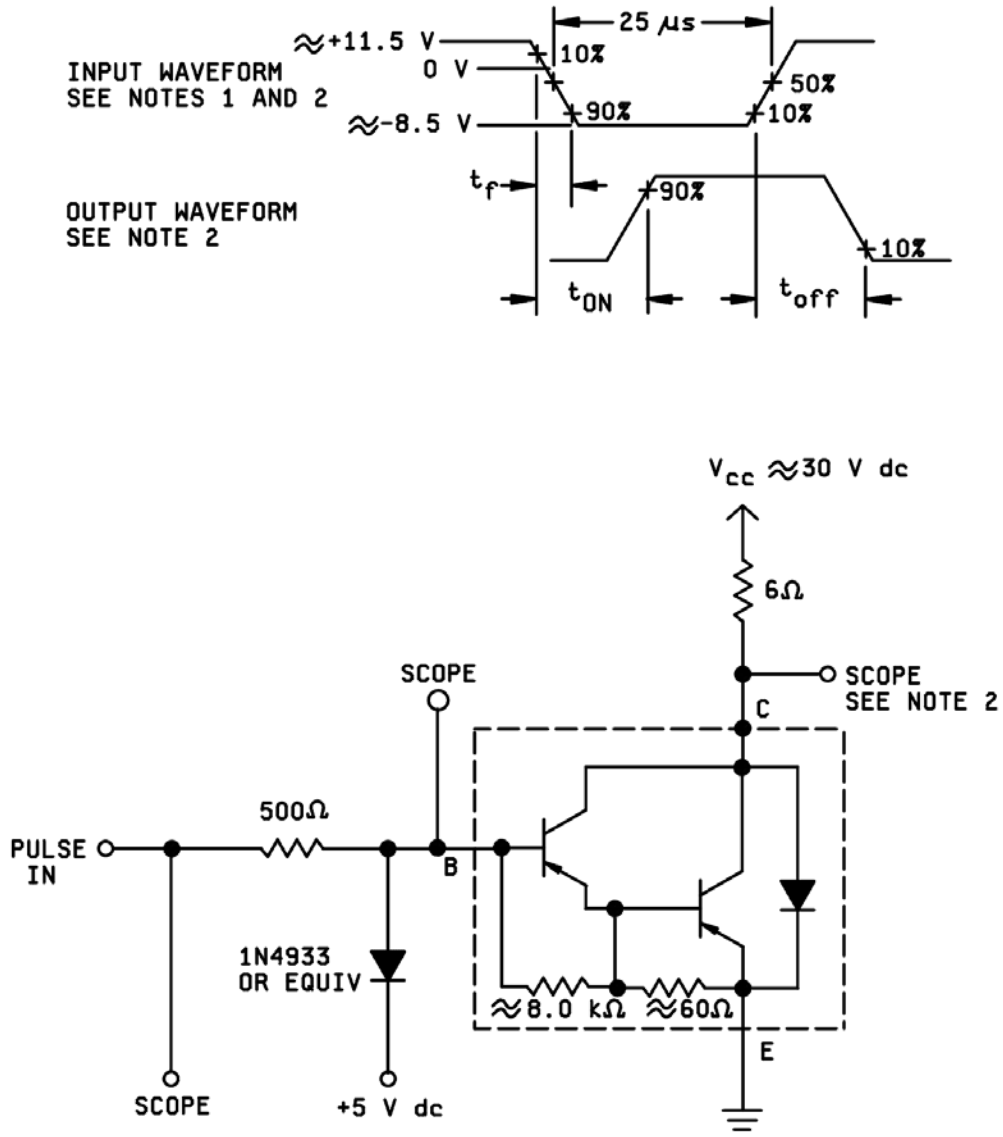


NOTES:

1. The input waveform is supplied by a pulse generator with the following characteristics: $t_r \leq 20$ ns, $t_f \leq 20$ ns, $Z_{out} = 50\ \Omega$, PW = 2.0 µs, duty cycle ≤ 2 percent.
2. Output wave forms are monitored on an oscilloscope with the following characteristics: $t_r \leq 2.0$ ns, $Z_{in} \geq 20\ k\Omega$, $C_{in} \leq 11.5$ pF.
3. Resistors shall be noninductive types.
4. The dc power supplies may require additional by-passing in order to minimize ringing.

FIGURE 3. Pulse response test circuit.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:29Z
Check the source to verify that this is the current version before use.

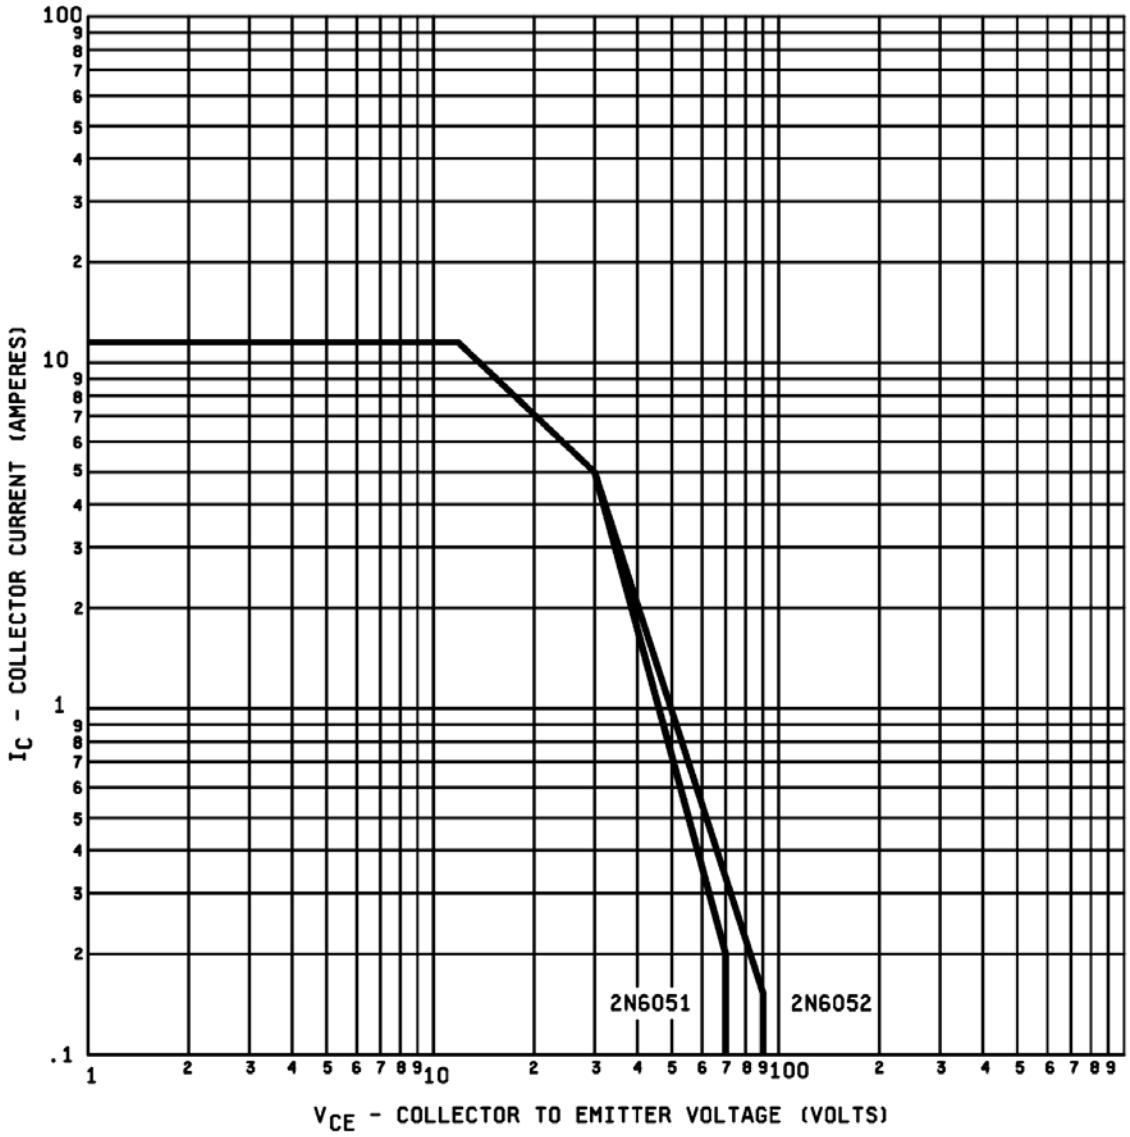



FIGURE 4. Maximum safe operating area graph (continuous dc).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:29Z
Check the source to verify that this is the current version before use.

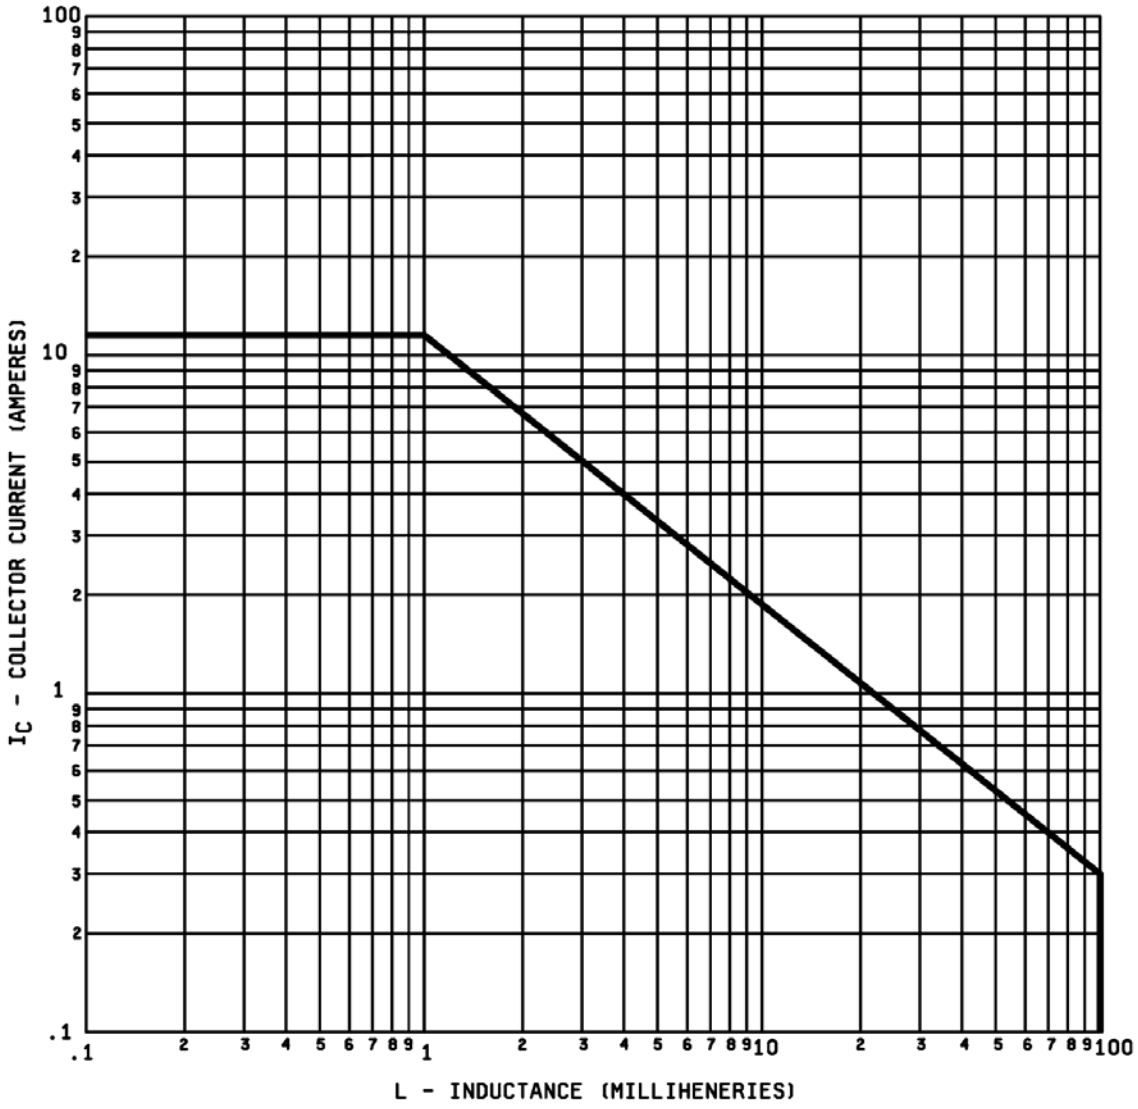



FIGURE 5. Safe operating area for switching between saturation and cutoff (unclamped inductive load).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:29Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the Military Service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory. The notes specified in MIL-PRF-19500 are applicable to this specification.)

6.1 Intended use. Semiconductors conforming to this specification are intended for original equipment design applications and logistic support of existing equipment.

* 6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Packaging requirements (see 5.1).


c. Lead finish (see 3.4.1).

* d. The complete PIN, see 1.5 and 6.5.

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List (QML 19500) whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from DLA Land and Maritime, ATTN: VQE, P.O. Box 3990, Columbus, OH 43218-3990 or e-mail vqe.chief@dla.mil. An online listing of products qualified to this specification may be found in the Qualified Products Database (QPD) at https://assist.dla.mil.

* 6.4 PIN construction example.

* 6.4.1 Encapsulated devices The PINs for encapsulated devices are constructed using the following form.

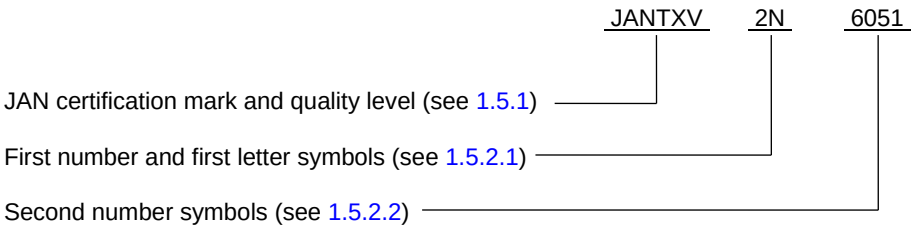




Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:29Z
Check the source to verify that this is the current version before use.

* 6.5 List of PINs. The following is a list of possible PINs available on this specification sheet.

* 6.5.1 List of PINs for encapsulated devices. The following is a list of possible PINs for encapsulated devices available on this specification sheet.

| PINs for devices of the base quality level | PINs for devices of the "TX" quality level | PINs for devices of the "TXV" quality level |
|---|---|---|
| JAN2N6051 | JANTX2N6051 | JANTXV2N6051 |
| JAN2N6052 | JANTX2N6052 | JANTXV2N6052 |

* 6.6 Request for new types and configurations. Requests for new device types or configurations for inclusions in this specification sheet should be submitted to: DLA Land and Maritime, ATTN: VAC, Post Office Box 3990, Columbus, OH 43218-3990 or by electronic mail at Semiconductor@.dla.mil or by facsimile (614) 693-1642 or DSN 850-6939.

6.7 Changes from previous issue. The margins of this specification are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - CR
Navy - EC
Air Force - 85
NASA - NA
DLA - CC

Review activities:
Air Force - 19, 99

Preparing activity:
DLA - CC

(Project 5961-2016-007)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:29Z
Check the source to verify that this is the current version before use.