The documentation and process conversion measures necessary to comply with this document shall be completed by 26 August 2026.

INCH-POUND

MIL-PRF-19500/554F
W/AMENDMENT 3
31 March 2026
SUPERSEDING
MIL-PRF-19500/554F
w/AMENDMENT 2
25 May 2020

PERFORMANCE SPECIFICATION SHEET

# SEMICONDUCTOR DEVICE DIODE, SILICON, SCHOTTKY BARRIER, FAST RECOVERY, TYPE 1N6392, JAN, JANTX, JANTXV, AND JANHC

This specification is approved for use by the all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-19500.

## 1. SCOPE

1.1 Scope. This specification covers the performance requirements for a silicon, fast recovery, Schottky barrier semiconductor diode intended for use as a power rectifier in reverse battery protection, converters, and power supply applications. Three levels of product assurance are provided for each encapsulated device (JAN, JANTX, and JANTXV). One level of product assurance (JANHC) is provided for each unencapsulated device type.

1.2 Package outlines. The device package outlines are as follows: Stud mount case DO-203AB (formerly DO-5) in accordance with figure 1 for all encapsulated device types. See figure 2 for unencapsulated devices.

1.3 Maximum ratings. Unless otherwise specified $T_A$ = 25°C.

| Type | $V_{RRM}$ and $V_{RWM}$ (1) | $V_{RSM}$ | $V_R$ (1) | $I_{FM}$ (2) $T_C$ = +115°C | $I_O$ (3) $T_C$ = +115°C | $I_{FSM}$ | $T_J$ $T_{STG}$ | Max $R_{\theta JC}$ |
|---|---|---|---|---|---|---|---|---|
| | V(pk) | V(pk) | V dc | A dc | A dc | A (pk) | °C | °C/W |
| 1N6392 | 45 | 54 | 45 | 60 | 54 | 1,000 | -55 to +175 | 1.0 |

(1) Full rated $V_{RRM}$ and $V_{RWM}$ is applicable over the range of $T_C$ = -55°C to + 173°C for $I_{FM}$ = 0. Full rated $V_R$ is applicable over the temperature range of $T_C$ = -55°C to +166°C. When $V_R$ = 45 V dc and $T_C$ = +166°C, then $T_J$ = +175°C.
(2) Average current with a 50 percent duty cycle square wave including reverse amplitude equal to the magnitude of full rated $V_{RWM}$. Derate linearly at 1.09 A dc/°C for $T_C$ > +115°C.
(3) Average current with an applied sine wave peak value equal to the magnitude of full rated $V_{RWM}$. For temperature-current derating curves, see figure 3.

Comments, suggestions, or questions on this document should be addressed to DLA Weapons Support, ATTN: VAC, P.O. Box 3990, Columbus, OH 43218-3990, or emailed to Semiconductor@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

FSC 5961

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:13Z
Check the source to verify that this is the current version before use.

1.4 Primary electrical characteristics. Unless otherwise noted, at $T_C$ = +25°C.

| Type | Max $V_{FM1}$ $I_{FM}$ = 120 A (pk) | Max $V_{FM2}$ $I_{FM}$ = 10 A (pk) | Max $I_{RM}$; $V_{RM}$ = 45 V (pk) | | Max $C_T$ $V_R$ = 5 V dc |
|---|---|---|---|---|---|
| | | | $T_J$ = +25°C | $T_J$ = +175°C | |
| | V (pk) | V (pk) | mA (pk) | mA (pk) | pF |
| 1N6391 | 0.85 | 0.54 | 2.0 | 200 | 3,000 |

1.5 Part or Identifying Number (PIN). The PIN is in accordance with MIL-PRF-19500, and as specified herein. See 6.4 for PIN construction example and 6.5 for a list of available PINs.

1.5.1 JAN brand and quality level indicator.

1.5.1.1 JAN certification mark and quality level for encapsulated devices. The quality level designators for encapsulated devices that are applicable for this specification sheet from the lowest to the highest level are as follows: "JAN", "JANTX", and "JANTXV".

1.5.1.2 JAN certification mark and quality level for unencapsulated devices (die). The quality level designators for unencapsulated devices (die) that are applicable for this specification sheet from the lowest to the highest level are as follows: "JANHC".

1.5.2 Device type. The designation system for the device types of diodes covered by this specification sheet are as follows.

1.5.2.1 First number and first letter symbols. The diodes of this specification sheet use the first number and letter symbols "1N".


1.5.2.2 Second number symbols. The second number symbols for the diodes covered by this specification sheet are as follows: "6392".

1.5.3 Lead finish. The lead finishes applicable to this specification sheet are listed on QML-19500.

1.5.4 Die identifiers for unencapsulated devices (manufacturers and critical interface identifiers). The manufacturer die identifier that is applicable for this specification sheet is "A".



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:13Z
Check the source to verify that this is the current version before use.

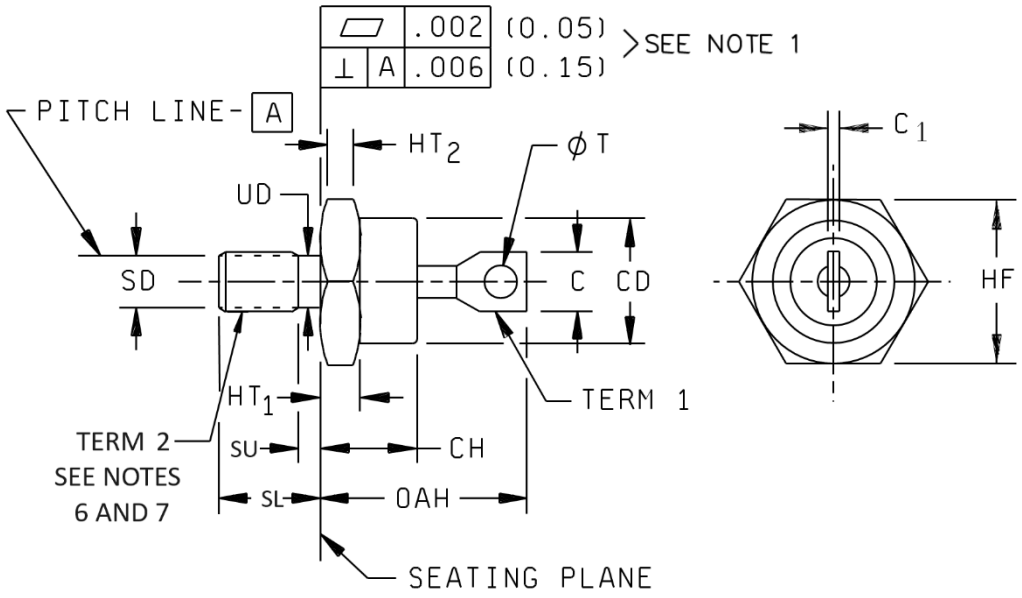



| Symbol | Dimensions | | | | Notes | Symbol | Dimensions | | | | Notes |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | in | in | mm | mm | | | in | in | mm | mm | |
| | Min | Max | Min | Max | | | Min | Max | Min | Max | |
| C | | .375 | | 9.53 | 3 | OAH | .750 | 1.00 | 19.05 | 25.40 | |
| $C_1$ | .025 | .080 | 0.64 | 2.03 | 3 | SD | | | | | 7 |
| CD | | .667 | | 16.94 | 4 | SL | .422 | .453 | 10.72 | 11.51 | |
| CH | | .450 | | 11.43 | | SU | | .090 | | 2.29 | 8 |
| HF | .669 | .688 | 17.00 | 17.48 | 5 | UD | .220 | .249 | 5.59 | 6.32 | |
| $HT_1$ | .115 | .200 | 2.92 | 5.08 | 6 | ΦT | .140 | .175 | 3.56 | 4.45 | |
| $HT_2$ | .060 | | 1.52 | | 6 | | | | | | |

NOTES:
1. Dimensions are in inches. Millimeters are given for general information only.
2. See 3.4.2 for the polarity of the terminals.
3. The angular orientation and peripheral configuration of terminal 1 is undefined, however, the major surfaces over dimensions C and $C_1$ shall be flat.
4. Dimension CD shall not exceed dimension HF.
5. A chamfer or undercut on one or both ends of the hex portion is optional; minimum base diameter at seating plane .600 inch (15.24 mm).
6. Device must not be damaged by torque of 30 inch-pound applied to .25-28 UNF-2B nut assembled on thread.
7. Threads are .25-28 UNF-2A in accordance with FED-STD-H28, "Screw-Thread Standards for Federal Services". Maximum pitch diameter (SD) of plated threads shall be basic pitch diameter .2268 inch (5.76 mm).
8. Length of incomplete or undercut threads of dimension UD.

FIGURE 1. Physical dimensions for stud mount DO−203AB package.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:13Z
Check the source to verify that this is the current version before use.

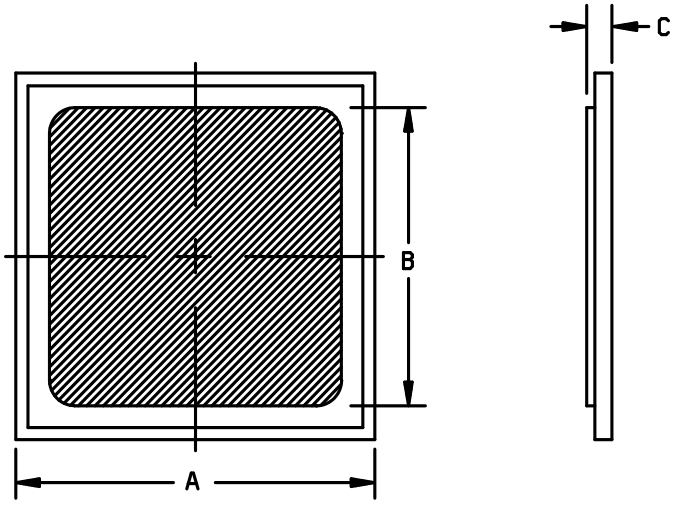


| Letter | Dimensions | | | |
|---|---|---|---|---|
| | in | in | mms | mm |
| | Min | Max | Min | Max |
| A | .210 | .220 | 5.38 | 5.46 |
| B | .190 | .210 | 5.03 | 5.08 |
| C | .012 | .013 | .30 | .33 |

NOTES:
1. Dimensions are in inches. Millimeters are given for general information only.
2. The metallization characteristics of the die are as follows:
   Anode (front) Ti / Ni / Ag 2,000Å, 2,500 Å, 20,000 Å
   Cathode (back) Ti / Ni / Ag 2,000 Å, 5,000 Å, 5,000 Å

FIGURE 2. Physical dimensions for JANHC die (A version).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:13Z
Check the source to verify that this is the current version before use.

2. APPLICABLE PUBLICATIONS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-19500 - Semiconductor Devices, General Specification for.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-750 - Test Methods for Semiconductor Devices.

(Copies of these documents are available online at https://quicksearch.dla.mil/.)

2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 General. The individual item requirements shall be as specified in MIL-PRF-19500 and as modified herein.

3.2 Qualification. Devices furnished under this specification shall be products that are manufactured by a manufacturer authorized by the qualifying activity for listing on the applicable qualified manufacturer's list (QML) before contract award (see 4.2 and 6.3).

3.3 Abbreviations, symbols, and definitions. The abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500.

3.4 Interface and physical dimensions. The interface and physical dimensions shall be as specified in MIL-PRF-19500, figures 1 (DO−203AB), and 2 (die) herein.

3.4.1 Lead finish. Lead finish shall be solderable in accordance with MIL-PRF-19500, MIL-STD-750, and herein. Where a choice of lead finish is desired, it shall be specified in the acquisition document (see 6.2).

3.4.2 Polarity. Devices in DO−203AB package (see figure 1) shall have the anode connected to term 1 and the cathode connected to term 2. The polarity of unpackaged JANHC die shall be as identified on figure 2.

3.4.3 Diode construction. These devices shall be constructed in a manner and using material which enable the diodes to meet the applicable requirements of MIL-PRF-19500 and this document.

3.5 Marking. Marking shall be in accordance with MIL-PRF-19500.

3.6 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in 1.3, 1.4, and table I.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:13Z
Check the source to verify that this is the current version before use.

3.7 Electrical test requirements. The electrical test requirements shall be specified in table I herein.

3.8 Workmanship. Semiconductor devices shall be processed in such a manner as to be uniform in quality and shall be free from other defects that will affect life, serviceability, or appearance.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3).

c. Conformance inspection (see 4.4).

d. Element evaluation (see 4.6).

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500 and as specified herein.

4.2.1 Group E qualification. Group E inspection shall be performed for qualification or requalification only. In case qualification was awarded to a prior revision of the specification sheet that did not request the performance of table II tests, the tests specified in table II herein that were not performed in the prior revision shall be performed on the first inspection lot of this revision to maintain qualification.

4.2.2 JANHC devices. JANHC devices shall be qualified in accordance with MIL-PRF-19500.

4.3 Screening of encapsulated devices (JANTX and JANTXV levels only). Screening shall be in accordance with table E-IV of MIL-PRF-19500, and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

| Screen | Measurements for JANTXV and JANTX levels |
|---|---|
| 3a | Condition C |
| (1) 3b | Surge current, see 4.3.1. |
| 3c | Thermal impedance, see 4.3.2. |
| 4 | Not applicable |
| 9 | Not applicable |
| 10 | Not applicable |
| (2) 11 | Reverse energy test (see 4.5.3), followed by $V_{FM1}$ and $I_{RM1}$ of table I, subgroup 2. |
| 12 | Burn-in, see 4.3.3. |
| (3) 13 | $V_{FM1}$ and $I_{RM1}$ of table 1, subgroup 2;<br>$\Delta V_{FM1}$ = 0.05 V (pk),<br>$\Delta I_{RM1}$ = ±100 percent or 5 mA (pk), whichever is greater.<br>Scope display evaluation (see 4.5.5). |

(1) Surge current shall precede thermal response. These tests shall be performed anytime after screen 3a and before screen 10.
(2) $I_{RM1}$ shall not be indicative of an open condition.
(3) All devices shall be subjected to the scope display evaluation test, and reverse energy test.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:13Z
Check the source to verify that this is the current version before use.

4.3.1 Surge current. Surge current shall be performed in accordance with test method 4066 of MIL-STD-750, with the following conditions: $I_{FSM}$ = 1,000 A, 6 surges, $t_P$ = 8.3 ms, 1/2 sine wave, or rectangular pulse of equivalent $I_{RMS}$, $I_O$ = 0, $V_{RWM}$ = 0, duty factor one percent minimum, $T_A$ = 25°C.

4.3.2 Thermal impedance. The thermal impedance measurements shall be performed in accordance with method 3101 or 4081 as applicable of MIL-STD-750 using the guidelines in that method for determining $I_M$, $I_H$, $t_H$, $t_{SW}$ ($V_C$ and $V_H$ where appropriate). Measurement delay time ($t_{MD}$) = 300 µs max. See table II, subgroup 4 herein.

4.3.3 Burn-in. Burn-in shall be performed in accordance with condition A of test method 1038 of MIL-STD-750, with the following conditions: $T_J$ = +150°C minimum, $V_R$ = 36 V dc, $I_O$ = 0, t = 48 hours.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500 and as specified herein.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with table E-V of MIL-PRF-19500, and table I herein.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-VIB (JAN, JANTX, and JANTXV) of MIL-PRF-19500, and as follows.

| Subgroup | Method | Condition |
|---|---|---|
| B2 | 4066 | Condition A; $I_{FSM}$ = 1,000 A (pk); 10 surges of 8.3 ms each at 1 minute intervals; $I_O$ = 45 A dc; $V_{RM}$ = 45 V (pk), +100°C < $T_C$ < +125°C. |
| B3 | 1048 | $T_J$ = +150°C minimum, $V_R$ = 36 V dc. $I_O$ = 0, t = 48 hours. |
| B5 | 4081 | See 4.3.2. |

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-VII of MIL-PRF-19500, and as follows.

| Subgroup | Method | Condition |
|---|---|---|
| C2 | 2036 | Test condition A, 15 lbs (6.80 kg), t = 15 s.<br>Test condition F (method B), 15 pounds (6.80 kg), t = 15 s.<br>Test condition D1, 3 inch-pound (0.34 newton meter), t = 15 s.<br>Test condition D2, 30 inch-pound (3.38 newton meter), t = 15 s. |
| C5 | 4081 | $R_{\theta JC}$ = 1.0°C/W maximum in accordance with 4.3.2 except $t_H$ = 25 s (minimum), n = 22, c = 0. |
| C6 | 1048 | $T_J$ = +150°C minimum, $V_R$ = 36 V dc. $I_O$ = 0. |
| C6 | 1037 | Operational power cycling, $I_F$ = 50 A dc, $T_{C(low)}$ = +40°C +0°C, -15°C; $T_{C(high)}$ = 115°C +5°C, -0°C; 22 devices, c = 0, (see 4.5.6). |

4.4.4 Group E inspection. Group E inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E−IX of MIL-PRF-19500 and table II herein. Electrical measurements (end-points) shall be in accordance with table I, subgroup 2 herein.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:13Z
Check the source to verify that this is the current version before use.

4.5 Methods of inspection. Methods of inspection shall be as specified in appropriate tables and as follows.

4.5.1 Pulse response measurements. The conditions for pulse response measurements shall be as specified in section 4 of MIL-STD-750.

4.5.2 Inspection conditions. Unless otherwise specified in MIL-PRF-19500 or herein, all inspections shall be conducted at a case temperature ($T_C$) of +25°C ± 3°C.

4.5.3 Peak reverse energy test. The peak reverse energy test shall be performed as specified on figure 4. The Schottky rectifier under test must be capable of absorbing the reverse energy, as defined, and meet the electrical requirements of table I, subgroup 4 herein.

4.5.4 Reverse current at peak reverse voltage, alternate test. The reverse current at peak reverse voltage test requirement may be satisfied by performing the reverse energy test of 4.5.3 and measuring breakdown voltage to ensure $V_{BR} \geq 54$ V (pk) with $I_{RM} = 2.0$ A (pk).

4.5.5 Scope display evaluation. A curve trace visual display of the reverse characteristics (voltage versus current) shall be made using a calibration of 10 mA per division vertical sensitivity, and 10 V dc for each division horizontal sensitivity. Increase the reverse voltage until the reverse current reaches 50 mA minimum to 70 mA maximum. Observe the curve characteristics. Any device with an erratic pattern, such as double trace, other than capacitance effects, intermittence, discontinuities other than zener noise at the knee of the curve, or shorts shall be removed from the lot. Time limit for this test shall be 5 seconds minimum. This test shall be the last test performed on the device in the 100 percent screening tests. The percent defective result for evaluation against the percent defective allowed (PDA) shall be determined prior to the results of this test.

4.5.6 DC intermittent operation life. DC intermittent operation life shall be performed in accordance with test method 1037 of MIL-STD-750. One complete cycle for this test shall consist of the following two steps: Step 1, heat the case to the $T_C$ (high) specified by passing the specified forward current through the diode under test. The reverse voltage shall be only enough to permit the reverse current to flow, and in any event should be a maximum of 5 V dc. Step 2, remove the applied current and allow the case temperature to cool to the $T_C$ (low) specified. No time limit is applicable to the steps, but the cycling must be continuous until the required number of cycles has been completed. It is permissible to force cool the device during step 2.

This test shall be considered a qualification test only, and needs to be performed during the initial qualification and as applicable to verify the adequacy of a design change.

4.6 Element evaluation of unencapsulated die. The element evaluation of unencapsulated die shall be in accordance with appendix G of MIL-PRF-19500.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:13Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

| Inspection 1/ | MIL-STD-750 | | Symbol | Limit | Limit | Unit |
|---|---|---|---|---|---|---|
| | Method | Conditions | | Min | Max | |
| Subgroup 1 | | | | | | |
| Visual and mechanical examination | 2071 | | | | | |
| Subgroup 2 | | | | | | |
| Thermal impedance | 3101 | See 4.3.2 | $Z_{\theta JX}$ | | | °C/W |
| Forward voltage | 4011 | Condition B; $I_{FM}$ = 120 A (pk) pulsed (see 4.5.1) | $V_{FM1}$ | | 0.85 | V (pk) |
| | | Condition B; $I_{FM}$ = 60 A (pk) pulsed (see 4.5.1) | $V_{FM2}$ | | 0.70 | V (pk) |
| | | Condition B; $I_{FM}$ = 10 A (pk) pulsed (see 4.5.1) | $V_{FM3}$ | | 0.54 | V (pk) |
| Reverse current | 4016 | Condition A or B, $V_{RM}$ = 45 V (pk) pulsed (see 4.5.1) | $I_{RM1}$ | | 2.0 | mA (pk) |
| Subgroup 3 | | | | | | |
| High temperature operation | | | | | | |
| Reverse current leakage | 4016 | Condition A or B, $V_{RM}$ = 45 V (pk) pulsed (see 4.5.1)<br>$T_J$ = +175°C<br>$T_J$ = +125°C | <br>$I_{RM2}$<br>$I_{RM3}$ | | <br>200<br>60 | <br>mA (pk)<br>mA (pk) |
| Low temperature operation | | $T_C$ = -55°C | | | | |
| Reverse current leakage | 4016 | Condition A or B, $V_{RM}$ = 45 V (pk) pulsed (see 4.5.1) | $I_{RM4}$ | | 400 | mA (pk) |
| Forward voltage | 4011 | Condition B; $I_{FM}$ = 10 A (pk) pulsed (see 4.5.1) | $V_{FM4}$ | | 0.72 | V (pk) |
| Subgroup 4 | | | | | | |
| Reverse current leakage at peak reverse voltage | 4016 | Peak reverse energy test (see 4.5.3), condition A or B, $V_{RSM}$ = 54 V (pk); Alternate test (see 4.5.4). | $I_{RM5}$ | | 2.0 | A (pk) |
| Capacitance | 4001 | $V_R$ = 5 V dc; f = 100 KHz ≤ f ≤ 1 Mhz | $C_T$ | | 3,000 | pF |

See footnote at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:13Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

| Inspection 1/ | MIL-STD-750 | | Symbol | Limit | Limit | Unit |
|---|---|---|---|---|---|---|
| | Method | Conditions | | Min | Max | |
| Subgroup 4 | | | | | | |
| Reverse current leakage at peak reverse voltage | 4016 | Peak reverse energy test (see 4.5.3), $V_{RSM}$ = 54 V (pk); Alternate test, see 4.5.4. | $I_{RM5}$ | | 2.0 | A (pk) |
| Capacitance | 4001 | $V_R$ = 5 V dc; f = 100 KHz ≤ f ≤ 1 Mhz | $C_T$ | | 3,000 | pF |
| Subgroup 5 | | | | | | |
| Not applicable | | | | | | |
| Subgroup 6 | | | | | | |
| Forward surge current | 4066 | Condition A; $I_{FSM}$ = 1,000 A (pk); 10 surges of $t_p$ = 8.3 ms each at 1 minute intervals, superimposed on $I_O$ = 22.5 A dc; $V_{RWM}$ = rated $V_{RWM}$ (see 1.3); $T_A$ = +100°C. | | | | |
| Electrical measurements | | See subgroup 2 of this table. | | | | |
| Subgroup 7 | | | | | | |
| Not applicable | | | | | | |

1/ For sampling plan, see MIL-PRF-19500.




Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:13Z
Check the source to verify that this is the current version before use.

TABLE II. Group E inspection (all quality levels) for qualification and requalification only.

| Inspection | MIL-STD-750 | | Sampling plan |
|---|---|---|---|
| | Method | Conditions | |
| Subgroup 1 | | | 45 devices, c = 0 |
| Thermal shock | 1056 | 100 cycles, 0° to 100°C. | |
| Hermetic seal | 1071 | | |
| Electrical measurement | | See table I, subgroup 2. | |
| Subgroup 2 | | | 45 devices, c = 0 |
| Steady-state reverse bias | 1038 | Test condition A, 1,000 hours. | |
| Electrical measurements | | See table I, subgroup 2. | |
| Subgroup 4 | | | Sample size = N/A |
| Thermal impedance curves | | See MIL-PRF-19500. | |
| Subgroup 5 | | | |
| Not applicable | | | |
| Subgroup 10 | | | 22 devices, c = 0 |
| Surge current | 4066 | Condition A; $T_A$ = +25°C; $I_{FSM}$ = 1000 A, 100 surges | |
| Electrical measurements | | See table I, subgroup 2. | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:13Z
Check the source to verify that this is the current version before use.

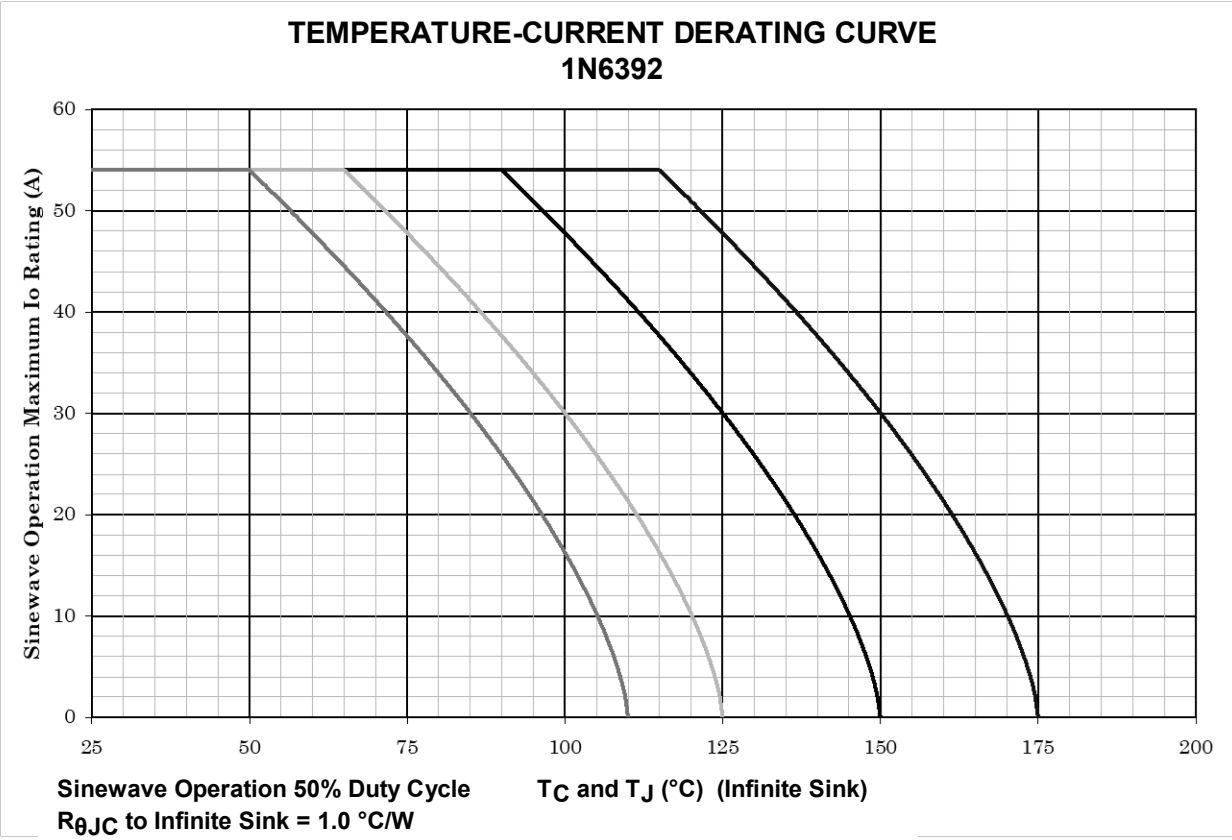


NOTE: Max finish-alloy temp = +175°C


NOTES:

1. All devices are capable of operating at ≤ $T_J$ specified on this curve. Any parallel line to this curve will intersect the appropriate power for the desired maximum $T_J$ allowed.
2. Derate design curve constrained by the maximum junction temperature ($T_J$ ≤ 175°C) and current rating specified. (See 1.3 herein.)
3. Derate design curves chosen at $T_J$ ≤ 150°C, 125°C, and 110°C to show current rating where most users want to limit $T_J$ in their application.

FIGURE 3. Temperature current derating curve.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:13Z
Check the source to verify that this is the current version before use.

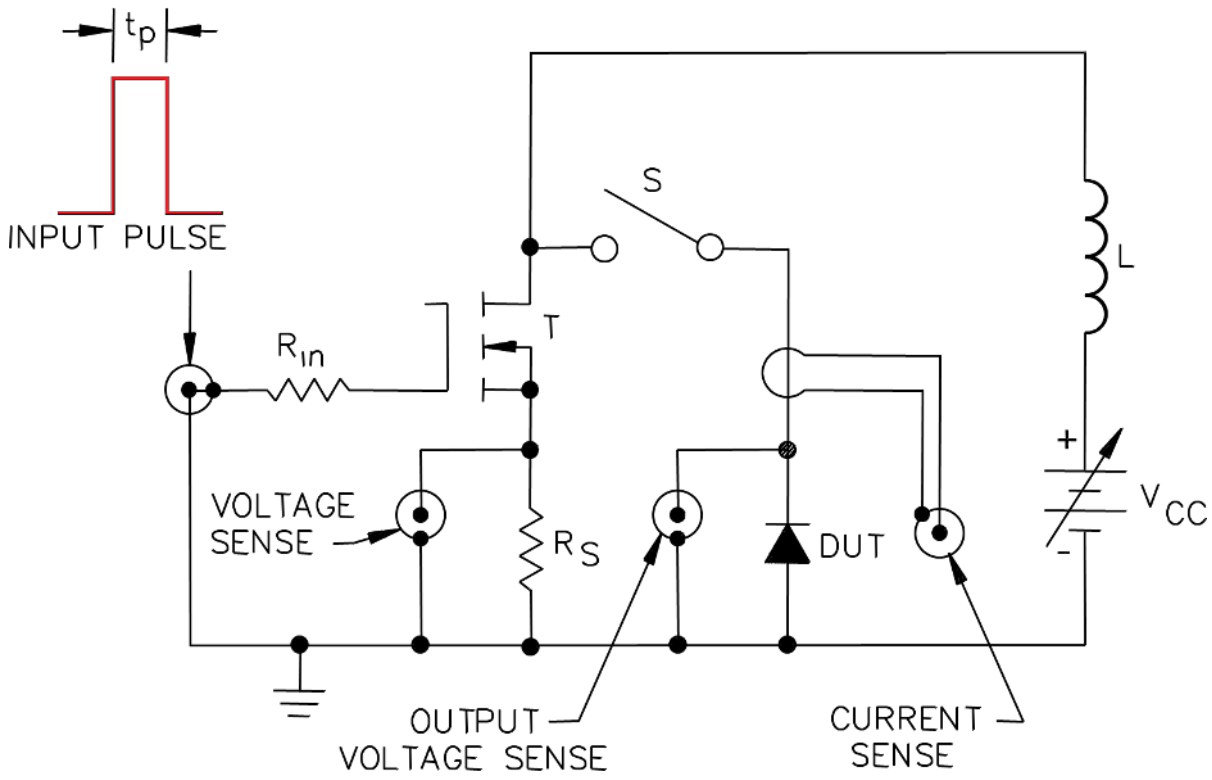


PROCEDURES:

1. With S open, adjust pulse width to test current of 2 amps across $R_S$.
2. Close S, verify test current with current sense.
3. Read peak output voltage (see 4.5.3).

NOTES:

| | | |
|---|---|---|
| 1. | Input pulse | $R_{in}$ = 50 ohms, 1 watt |
| 2. | $V_G$ = 10 volts | $R_S$ = 0.1 ohms, 1 watt |
| 3. | $R_G$ = 50 ohms | $V_{CC}$ ≈ 10 volts |
| 4. | Pulse width ≈ 30 µs | L = 260 µH |
| 5. | Duty cycle ≤ 1percent | T = IRF130/2N6756 or equivalent |

FIGURE 4. Peak reverse energy test circuit.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:13Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the Military Service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory. The notes specified in MIL-PRF-19500 are applicable to this specification.)

6.1 Intended use. Semiconductors conforming to this specification are intended for original equipment design applications and logistic support of existing equipment.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Packaging requirements (see 5.1).


c. Lead finish (see 3.4.1).

d. The complete PIN, see 1.5 and 6.5.

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List (QML 19500) whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from DLA Weapons Support, ATTN: VQE, P.O. Box 3990, Columbus, OH 43218-3990 or e-mail vqe.chief@dla.mil. An online listing of products qualified to this specification may be found in the Qualified Products Database (QPD) at https://qpldocs.dla.mil.

6.4 PIN construction examples.


6.4.1 Encapsulated devices The PINs for encapsulated devices are constructed using the following form.

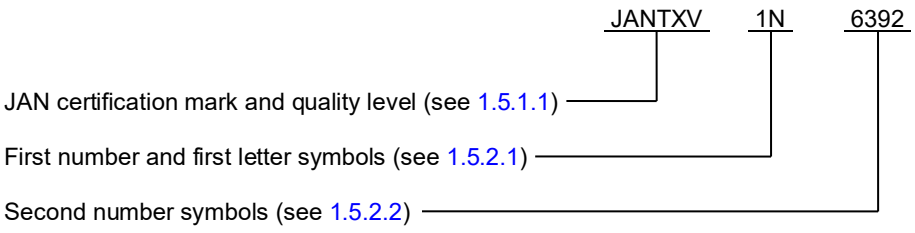




Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:13Z
Check the source to verify that this is the current version before use.

6.4.2 Un-encapsulated devices. The PINs for un-encapsulated devices are constructed using the following form.

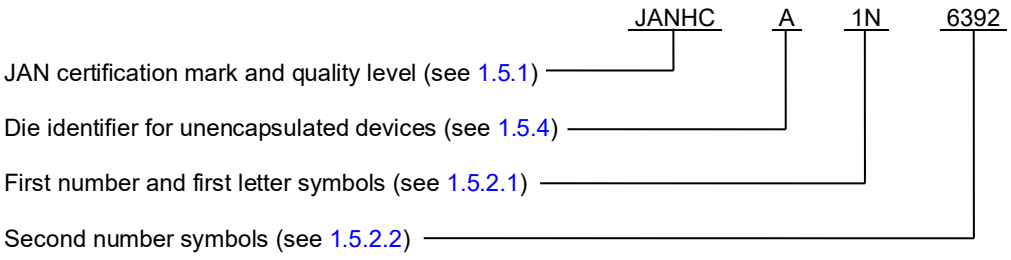


6.5 List of PINs.

6.5.1 List of PINs for encapsulated devices. The following is a list of possible PINs for encapsulated devices available on this specification sheet: JAN1N6392, JANTX1N6392, and JANTXV1N6392.

6.5.2 List of PINs and ordering information for unencapsulated devices. The following is a list of possible PINs available on this specification sheet. The qualified die suppliers with the applicable letter version will be identified on the QML.

| Die ordering information | |
|---|---|
| Type | Manufacturer |
| | 43611 |
| 1N6392 | JANHCA1N6392 |

6.6 Amendment notations. The margins of this specification are marked with vertical bars to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

CONCLUDING MATERIAL

Custodians:
Air Force − 85
NASA − NA
DLA − CC

Review activities:
Air Force − 19

Preparing activity:
DLA − CC

(Project 5961−2026−004)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:13Z
Check the source to verify that this is the current version before use.