The documentation and process conversion measures necessary to comply with this revision shall be completed by 27 February 2024.

INCH-POUND

MIL-PRF-19500/597G
w/AMENDMENT 3
27 November 2023
SUPERSEDING
MIL-PRF-19500/597G
w/AMENDMENT 2
17 October 2018

PERFORMANCE SPECIFICATION SHEET

TRANSISTOR, QUAD, FIELD EFFECT, N-CHANNEL, SILICON,
14-PIN DUAL INLINE PACKAGE, TYPE 2N7334,
QUALITY LEVELS JAN, JANTX, JANTXV, JANS, JANHC, AND JANKC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-19500.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for quad N-channel, enhancement-mode, MOSFET, power transistor with avalanche energy ratings (E_{AS} and E_{AR}) and maximum avalanche current (I_{AR}). Four levels of product assurance (JAN, JANTX, JANTXV, and JANS) are provided for each hermetic encapsulated device type as specified in MIL-PRF-19500. Two levels of product assurance (JANHC and JANKC) are provided for each unencapsulated device type (die) as specified in MIL-PRF-19500.

1.2 Physical dimensions. The device package styles are as follows: 14 pin dual-in line package in accordance with figure 1 and unencapsulated die in accordance with figures 2 and 3 for device types JANHC and JANKC.

1.3 Maximum ratings. Unless otherwise specified, T_A = +25°C.

P_T (1) T_C = +25°C (free air)		V_{GS}	I_{D1} (2) (3)	I_{D2} (2)	I_S	E_{AS}	E_{AR}
(1 die)	(4 die)		T_C = +25°C	T_C = +100°C			
W	W	V dc	A dc	A dc	A dc	mj	mj
1.4	2.5	±20	1.0	0.6	1.0	75	0.14

I_{AR} (2)	I_{DM} (4)	T_{op} and T_{STG}	Maximum $r_{DS(on)}$ (1) V_{GS} = 10 V dc, I_D = I_{D2}		$R_{\theta JA1}$ maximum (1 die)	$R_{\theta JA2}$ maximum (4 die)	$R_{\theta JC}$ maximum (1 die)
			T_J = +25°C	T_J = +150°C			
A	A(pk)	°C	ohm	ohm	°C/W	°C/W	°C/W
1.0	4.0	-55 to +150	0.70	1.4	90	50	17

Comments, suggestions, or questions on this document should be addressed to DLA Land and Maritime, ATTN: VAC, P.O. Box 3990, Columbus, OH 43218-3990, or emailed to Semiconductor@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A FSC 5961

* DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:53Z
Check the source to verify that this is the current version before use.

1.3 Maximum ratings – Continued.

(1) Derate linearly 11 mW/°C for T_C > +25°C for one die.
(2) The following formula derives the maximum theoretical I_D limit. I_D is limited by package and internal wires and may be limited by pin diameter: $$I_D = \sqrt{\frac{T_{JM} - T_C}{(R_{\theta JC}) \times (R_{DS}(on) \text{ at } T_{JM})}}$$
(3) See figure 4, maximum drain current graph.
(4) I_{DM} = 4 I_{D1}; I_{D1} as calculated in note 2.

1.4 Primary electrical characteristics. Unless otherwise specified, T_C = +25°C.

Type	Minimum $V_{(BR)DSS}$ V_{GS} = 0 V I_D = 1 mA dc	$V_{GS(th)1}$ $V_{DS} \geq V_{GS}$ I_D = 0.25 mA		Maximum I_{DSS1} V_{GS} = 0 V V_{DS} = 80 percent of rated V_{DS}	Maximum $r_{DS(on)1}$ (1) V_{GS} = 10 V dc $I_D = I_{D2}$ T_J = +25°C
	V dc	V dc		µA dc	ohms
		Min	Max		
2N7334	100	2.0	4.0	25	0.70

(1) Pulsed (see 4.5.1).

1.5 Part or Identifying Number (PIN). The PIN is in accordance with MIL-PRF-19500, and as specified herein. See 6.4 for PIN construction example and 6.5 for a list of available PINs.

1.5.1 JAN certification mark and quality level.

1.5.1.1 Quality level designators for encapsulated devices. The quality level designators for encapsulated devices that are applicable for this specification sheet from the lowest to the highest level are as follows: "JAN", "JANTX", "JANTXV", and "JANS".

1.5.1.2 Quality level designators for unencapsulated devices (die). The quality level designators for unencapsulated devices (die) that are applicable for this specification sheet from the lowest to the highest level are as follows: "JANHC" and "JANKC".

1.5.2 Device type. The designation system for the device types of transistors covered by this specification sheet are as follows.

1.5.2.1 First number and first letter symbols. The transistors of this specification sheet use the first number and letter symbols "2N".


1.5.2.2 Second number symbols. The second number symbols for the transistors covered by this specification sheet is "7334".

1.5.3 Suffix symbols. Suffix symbols are not applicable for this specification sheet.

1.5.4 Lead finish. The lead finishes applicable to this specification sheet are listed on QML-19500.

1.5.5 Die identifiers for unencapsulated devices (manufacturers and critical interface identifiers). The manufacturer die identifiers that are applicable for this specification sheet are "A" and "B" (see 6.4 and figures 2 and 3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:53Z
Check the source to verify that this is the current version before use.

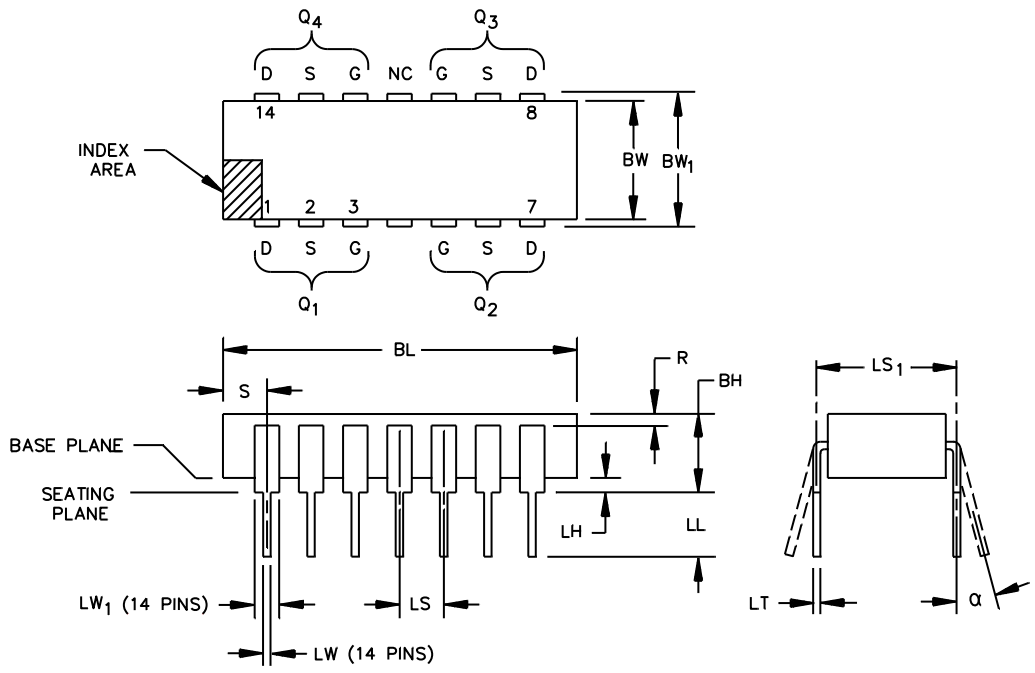


Symbol	Dimensions				Notes
	In	In	mm	mm	
	Min	Max	Min	Max	
BH	.105	.175	2.67	4.45	4
BL	.690	.770	17.53	19.56	5
BW	.280	.310	7.11	7.87	5
BW_1	.290	.325	7.37	8.26	6
LH	.025	.055	0.64	1.40	4, 7
LL	.125	.175	3.18	4.45	4
LT	.008	.012	0.203	0.305	

Symbol	Dimensions				Notes
	In	In	mm	mm	
	Min	Max	Min	Max	
LS	.100 TP		2.54 TP		8
LS_1	.300 TP		7.62 TP		
LW	.015	.021	0.381	0.533	7
LW_1	.038	.060	0.97	1.52	
R	.010		0.25		
S	.030	.095	0.76	2.41	
α	0°	15°	0°	15°	9

NOTES:
1. Dimensions are in inches. Millimeters are for general information only.
2. Pin-out: G = gate, S = source, D = drain, and NC = not connected.
3. Index area: A notch or a pin 1 identification mark shall be located adjacent to pin 1. The manufacturer's identification shall not be used as a pin 1 identification mark.
4. This dimension shall be measured with the device seated in JEDEC Seating Plane Gauge GS–003.
5. This dimension includes allowance for glass overrun, meniscus, and lid to base mismatch.
6. Lead center when α is 0°. Dimension BW_1 shall be measured at the centerline of the leads.
7. Outlines on which the seating plane is coincident with the base plane (dimension LH = 0), terminal standoffs are not required, and dimension LW_1 may equal dimension LW along any part of the lead above the seating/base plane.
8. Leads within .005 inch (0.13 mm) radius of True Position (TP) at seating gauge plane with maximum material condition and unit installed.
9. Dimension α applies to spread leads prior to installation.

FIGURE 1. Physical dimensions and configuration of MS-030AB (see 6.8).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:53Z
Check the source to verify that this is the current version before use.

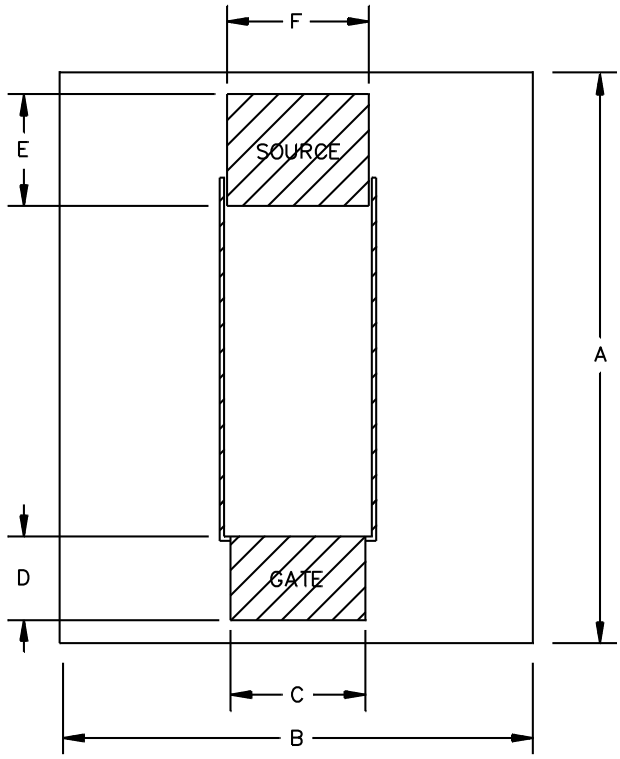


Letter	Dimensions			
	Inches	Inches	Millimeters	Millimeters
	Minimum	Maximum	Minimum	Maximum
A	.082	.092	2.08	2.34
B	.059	.069	1.49	1.75
C	.021	.031	0.53	0.78
D	.013	.023	0.33	0.58
E	.014	.024	0.35	0.61
F	.020	.030	0.51	0.76

NOTES:
1. Dimensions are in inches. Millimeters are given for general information only.
2. Unless otherwise specified, tolerance is ± .005 inch (0.13 mm).
3. The physical characteristics of the die thickness are as follows: The back metals are chromium, nickel, and silver (Cr, Ni, and Ag). The top metal is aluminum (Al).
4. The back contact of the die (not shown) is the drain.
5. Die thickness is .0187 inch (0.475 mm) ±.001 inch (0.025 mm).

FIGURE 2. Physical dimensions of die JANHCA and JANKCA (A version).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:53Z
Check the source to verify that this is the current version before use.

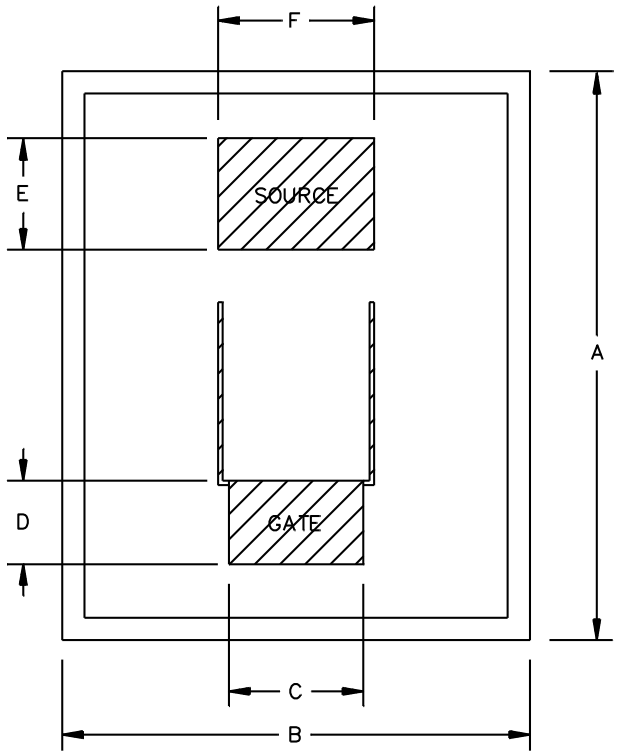

Letter	Dimensions			
	Inches	Inches	Millimeters	Millimeters
	Minimum	Maximum	Minimum	Maximum
A	.082	.089	2.08	2.26
B	.062	.066	1.58	1.68
C	.019	.021	0.48	0.53
D	.012	.014	0.30	0.36
E	.013	.015	0.33	0.38
F	.022	.024	0.56	0.61

NOTES:
1. Dimensions are in inches. Millimeters are given for general information only.
2. Unless otherwise specified, tolerance is ±.005 inch (0.13 mm).
3. The physical characteristics of the die are as follows: The back metals are chromium, nickel, and silver (Cr, Ni, and Ag). The top metal is aluminum (Al).
4. The back contact of the die (not shown) is the drain.
5. Die thickness is .015 inch (0.38 mm) ±.001 inch (0.025 mm).

FIGURE 3. Physical dimensions of die JANHCB and JANKCB (B-version).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:53Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-19500 – Semiconductor Devices, General Specification for.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-750 – Test Methods for Semiconductor Devices.

* (Copies of these documents are available online at https://quicksearch.dla.mil.)

2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 General. The individual item requirements shall be as specified in MIL-PRF-19500 and as modified herein.

3.2 Qualification. Devices furnished under this specification shall be products that are manufactured by a manufacturer authorized by the qualifying activity for listing on the applicable qualified manufacturer's list (QML) before contract award (see 4.2 and 6.3).

3.3 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500.

I_{AS}	Rated avalanche current, nonrepetitive.
nC	nano coulomb.
T_{JM}	Junction temperature, maximum.

3.4 Interface and physical dimensions. The interface requirements and physical dimensions shall be as specified in MIL-PRF-19500 and on figure 1 (MS-030AB) and figures 2 and 3 (unencapsulated die) herein.

3.4.1 Lead finish. Unless otherwise specified, the lead finish shall be solderable as defined in MIL-STD-750, MIL-PRF-19500, and herein. Where a choice of lead finish is desired, it shall be specified in the acquisition document (see 6.2).

3.4.2 Pin out. The pin out of the device types shall be as shown on figures 1, 2, and 3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:53Z
Check the source to verify that this is the current version before use.

3.5 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in 1.3, 1.4, and table I herein.

3.5.1 Electrostatic discharge sensitive (ESDS). The devices covered by this specification sheet have been classified as ESDS. The devices shall be handled in accordance with the ESD program established to comply with the requirements of MIL-PRF-19500 to avoid damage due to the accumulation of static charge. The following handling practices shall be followed:

a. Devices shall be handled on benches with conductive handling devices.

b. Ground test equipment, tools, and personnel handling devices.

c. Do not handle devices by the leads.

d. Store devices in conductive foam or carriers.

e. Avoid use of plastic, rubber, or silk in MOS areas.

f. Maintain relative humidity above 50 percent if practical.

g. Care shall be exercised, during test and troubleshooting, to apply not more than maximum rated voltage to any lead.

h. Gate must be terminated to source, R ≤ 100 kΩ, whenever bias voltage is to be applied drain to source.

3.6 Electrical test requirements. The electrical test requirements shall be as specified in table I.

3.7 Marking. Marking shall be in accordance with MIL-PRF-19500.

3.8 Workmanship. Devices shall be processed in such a manner as to be uniform in quality and shall be free from other defects that will affect life, serviceability, or appearance.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3).

c. Conformance inspection (see 4.4, tables I and II).

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500, and as specified herein.

4.2.1 JANHC and JANKC devices. Qualification for JANHC and JANKC devices shall be as specified in MIL-PRF-19500.

4.2.2 Group E qualification. Group E inspection shall be performed for qualification or re-qualification only. In case qualification was awarded to a prior revision of the specification sheet that did not request the performance of table II tests, the tests specified in table II herein that were not performed in the prior revision shall be performed on the first inspection lot of this revision to maintain qualification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:53Z
Check the source to verify that this is the current version before use.

4.3 Screening.

4.3.1 Screening of packaged devices (quality levels JANS, JANTX and JANTXV only). Screening of packaged devices shall be in accordance with table E-IV of MIL-PRF-19500, and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

Screen	Measurements for Quality level JANS (1) (2)	Measurements for Quality levels JANTX and JANTXV (1) (2)
(3)	Gate stress test (see 4.3.1.1).	Gate stress test (see 4.3.1.1).
(3) (4)	Method 3470 of MIL-STD-750, (see 4.3.1.2) optional.	Method 3470 of MIL-STD-750, (see 4.3.1.2) optional.
3c (3)	Method 3161 of MIL-STD-750, (see 4.3.1.3).	Method 3161 of MIL-STD-750, (see 4.3.1.3).
9	See table I, subgroup 2 herein.	See table I, subgroup 2 herein.
10	Method 1042 of MIL-STD-750, test condition B.	Method 1042 of MIL-STD-750, test condition B.
11	Subgroup 2 of table I herein; ΔI_{GSSF1} = ±20 nA dc or ±100 percent of initial value, whichever is greater. ΔI_{GSSR1} = ±20 nA dc or ±100 percent of initial value, whichever is greater. ΔI_{DSS1} = ±25 µA dc or ±100 percent of initial value, whichever Is greater.	Subgroup 2 of table I herein.
12	Method 1042 of MIL-STD-750, test condition A, t = 240 hours	Method 1042 of MIL-STD-750, test condition A.
13	Subgroups 2 and 3 of table I herein; ΔI_{GSSF1} = ±20 nA dc or ±100 percent of initial value, whichever is greater. ΔI_{GSSR1} = ±20 nA dc or ±100 percent of initial value, whichever is greater. ΔI_{DSS1} = ±25 µA dc or ±100 percent of initial value, whichever is greater. $\Delta r_{DS(on)1}$ = ±20 percent of initial value. $\Delta V_{GS(th)1}$ = ±20 percent of initial value.	Subgroup 2 of table I herein; ΔI_{GSSF1} = ±20 nA dc or ±100 percent of initial value, whichever is greater. ΔI_{GSSR1} = ±20 nA dc or ±100 percent of initial value, whichever is greater. ΔI_{DSS1} = ±25 µA dc or ±100 percent of initial value, whichever is greater. $\Delta r_{DS(on)1}$ = ±20 percent of initial value. $\Delta V_{GS(th)1}$ = ±20 percent of initial value.

(1) At the end of the test program, I_{GSSF1}, I_{GSSR1} and I_{DSS1} are measured.
(2) An out-of-family program to characterize I_{GSSF1}, I_{GSSR1}, I_{DSS1} and $V_{GS(th)1}$ shall be invoked.
(3) Shall be performed anytime before screen 9.
(4) This test method in no way implies a repetitive avalanche energy rating. This test need not be performed in group A when performed as a screen.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:53Z
Check the source to verify that this is the current version before use.

4.3.1.1 Gate stress test. Apply V_{GS} = +30 V minimum for t = 250 µs minimum.

4.3.1.2 Single pulse avalanche energy (E_{AS}). The single pulse avalanche energy capability shall be determined in accordance with method 3470 of MIL-STD-750. The following details shall apply:

a.	Peak current (I_{AS})	I_{D1}.
b.	Peak gate voltage (V_{GS})	10 V.
c.	Gate to source resistor (R_{GS})	25 ≤ R_{GS} ≤ 200Ω.
d.	Initial case temperature	+25°C +10°C, –5°C.
e.	Inductance	$\left[\frac{2E_{AS}}{(I_{D1})^2}\right]\left[\frac{V_{BR} - V_{DD}}{V_{BR}}\right]$ mH minimum.
f.	Number of pulses to be applied	1 pulse minimum.
g.	Supply voltage (V_{DD})	25 V minimum.

4.3.1.3 Thermal impedance . The thermal impedance measurements shall be performed in accordance with method 3161 of MIL-STD-750 using the guidelines in that method for determining I_M, I_H, t_H, t_{SW}, t_{MD} (and V_H where appropriate). See figure 5 herein for thermal response curves. See table II, group E, subgroup 4 herein.

4.3.2 Screening of unencapsulated die (JANHC and JANKC). Screening of JANHC and JANKC unencapsulated die shall be in accordance with appendix G of MIL-PRF-19500. The burn-in duration for JANKC level shall follow the JANS requirements; the JANHC level shall follow the JANTX requirements of table E-IV of MIL-PRF-19500. As a minimum, die shall be 100 percent probed in accordance with group A.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500, and as specified herein. Alternate conformance inspection flow in accordance with appendix E of MIL-PRF-19500 is allowed.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with table E-V of MIL-PRF-19500, and table I herein.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-VIA (JANS) or table E-VIB (JAN, JANTX, and JANTXV) of MIL-PRF-19500, and herein.

4.4.2.1 Quality level JANS (table E-VIA of MIL-PRF-19500).

Subgroup	Method	Conditions
B3	1051	Condition G.
B5	1042	Condition A (Steady-state reverse bias), V_{DS} = 80 percent of rated, T_A = +175°C, t = 120 hours.
B5	1042	Condition B (Steady-state gate bias), V_{GS} = 80 percent of rated, T_A = +175°C, t = 24 hours.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:53Z
Check the source to verify that this is the current version before use.

4.4.2.2 Quality levels JAN, JANTX, and JANTXV (table E-VIB of MIL-PRF-19500).

	Subgroup	Method	Conditions
	B2	1051	Condition G.
*	B3	1042	Condition A (Steady-state reverse bias), V_{DS} = 80 percent of rated, T_A = +150°C, t = 160 hours. Condition B (Steady-state gate bias), V_{GS} = 80 percent of rated, T_A = +150°C, t = 24 hours.
	B5 and B6		Not applicable.

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-VII of MIL-PRF-19500 and as follows herein.

	Subgroup	Method	Conditions
	C2	2036	Condition E: The sampling plan applies to the number of leads tested. A minimum of three devices shall be tested.
	C5	3161	See 4.3.1.3.
*	C6	1042	Condition A (Steady-state reverse bias), V_{DS} = 80 percent of rated, T_A = +150°C, t = 340 hours. Electrical measurements in accordance with table I, subgroup 2 herein. Condition B (Steady-state gate bias), V_{GS} = 80 percent of rated, T_A = +150°C, t = 24 hours.

4.4.4 Group E inspection. Group E inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-IX of MIL-PRF-19500 and as specified in table II herein.

4.5 Method of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows.

4.5.1 Pulse response measurements. Conditions for pulse response measurement shall be as specified in section 4 of MIL-STD-750.

4.5.2 Thermal resistance. Thermal resistance measurements shall be performed in accordance with method 3161 of MIL-STD-750. $R_{\theta JA1}$ maximum = 90°C/W, for each die. $R_{\theta JA1}$ shall be performed on each die. The following details shall apply:

a.	I_M measuring current	10 mA.
b.	I_H drain heating current	0.15 A minimum.
c.	t_H heating time	Steady-state (see method 3161 of MIL-STD-750 for definition).
d.	V_H drain-source heating voltage	15 V minimum.
e.	t_{MD} measurement time delay	30 to 60 µs.
f.	t_{SW} sample window time	10 µs maximum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:53Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

Inspection 1/	MIL-STD-750		Symbol	Limit	Limit	Unit
	Method	Conditions		Min	Max	
Subgroup 1						
Visual and mechanical inspection	2071					
Subgroup 2						
Thermal impedance 2/	3161	See 4.3.1.3	$Z_{\theta JC}$		10	°C/W
Breakdown voltage, drain-to-source	3407	Bias condition C V_{GS} = 0 V dc, I_D = 1 mA dc,	$V_{(BR)DSS}$	100		V dc
Gate-to-source voltage (threshold)	3403	$V_{DS} \geq V_{GS}$, I_D = 0.25 mA dc	$V_{GS(th)1}$	2.0	4.0	V dc
Gate current (forward)	3411	Bias condition C, V_{GS} = +20 V dc, V_{DS} = 0	I_{GSSF1}		+100	nA dc
Gate current (reverse)	3411	Bias condition C, V_{GS} = -20 V dc, V_{DS} = 0	I_{GSSR1}		-100	nA dc
Drain current	3413	Bias condition C, V_{GS} = 0 V dc, V_{DS} = 80 percent of rated V_{DS}	I_{DSS1}		25	µA dc
Static drain-to-source on-state resistance	3421	Bias condition A, V_{GS} = 10 V dc, pulsed (see 4.5.1) I_D = rated I_{D2} (see 1.3), I_D = I_{D1} (see 1.3)	 $r_{DS(on)1}$ $r_{DS(on)2}$		 0.70 0.80	 Ω Ω
Forward voltage	4011	Condition A, V_{GS} = 0 V, I_D = I_{D1}	V_{SD}		1.5	V
Subgroup 3						
High temperature operation:		T_C = T_J = +125°C				
Gate current	3411	Bias condition C, V_{GS} = +20 V dc and -20 V dc, V_{DS} = 0 V dc	I_{GSS2}		±200	nA dc
Drain current	3413	Bias condition C, V_{GS} = 0 V dc, V_{DS} = 80 percent of rated V_{DS}	I_{DSS2}		0.25	mA dc
Static drain-to-source on-state resistance	3421	Bias condition A, V_{GS} = 10 V dc, I_D = rated I_{D2}, pulsed (see 4.5.1)	$r_{DS(on)3}$		1.4	Ω

See footnotes at end table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:53Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection – Continued.

Inspection 1/	MIL-STD-750		Symbol	Limit	Limit	Unit
	Method	Conditions		Min	Max	
Subgroup 3 – Continued						
Gate-to-source voltage (threshold)	3403	$V_{DS} \geq V_{GS}$, I_D = 0.25 mA dc	$V_{GS(th)2}$	1.0		V dc
Low temperature operation:		$T_C = T_J$ = –55°C				
Gate-to-source voltage (threshold)	3403	$V_{DS} \geq V_{GS}$, I_D = 0.25 mA dc	$V_{GS(th)3}$		5.0	V dc
Subgroup 4						
Switching time test	3472	I_D = rated I_{D1}, V_{GS} = 10 V dc, R_g = 7.5Ω, V_{DD} = 50 percent of $V_{BR(DSS)}$				
Turn-on delay time			$t_{d(on)}$		20	ns
Rise time			t_r		25	ns
Turn-off delay time			$t_{d(off)}$		40	ns
Fall time			t_f		40	ns
Subgroup 5						
Single pulse unclamped inductive switching 3/	3470	See 4.3.1.2, n = 116, c = 0	E_{AS}			
Electrical measurements		See subgroup 2 of this table				
Safe operating area test for power MOSFETs	3474	V_{DS} = 80 percent of rated $V_{BR(DSS)}$, I_D = .25 A, t_p = 10 ms, (see figure 6)				
Electrical measurements		See subgroup 2 of this table				
Subgroup 6						
Not applicable						

See footnotes at end table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:53Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection – Continued.

Inspection 1/	MIL-STD-750		Symbol	Limit	Limit	Unit
	Method	Conditions		Min	Max	
Subgroup 7						
Gate charge	3471	Condition B				
On-state gate charge			$Q_{g(on)}$		15	nC
Gate to source charge			Q_{gs}		7.5	nC
Gate to drain charge			Q_{gd}		7.5	nC
Reverse recovery time	3473	Condition A, d_i/d_t = 100 A/µs, $V_{DD} \leq 30$ V dc; $I_D = I_{D1}$, (see 1.3)	t_{rr}		200	ns

1/ For sampling plan, see MIL-PRF-19500.
2/ For end-point electrical measurements, this test is required for the following subgroups:
Table E-VIA of MIL-PRF-19500, Group B, subgroup 3 and 4 (quality level JANS);
Table E-VIB of MIL-PRF-19500, Group B, subgroup 2 and 3 (quality levels JAN, JANTX, and JANTXV);
Table E-VII of MIL-PRF-19500, Group C, subgroup 2 and 6 (all quality levels);
Table E-IX of MIL-PRF-19500, Group E, subgroup 1 (all quality levels).
3/ This test need not be performed in group A if performed in screening.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:53Z
Check the source to verify that this is the current version before use.

TABLE II. Group E inspection (all quality levels) for qualification or re-qualification only. 1/

	Inspection	MIL-STD-750		Sample plan
		Method	Conditions	
	Subgroup 1			45 devices c = 0
	Temperature cycling (air to air)	1051		
	Hermetic seal Fine leak Gross leak	1071		
	Electrical measurements		See table I, subgroup 2.	
	Subgroup 2 2/			45 devices c = 0
*	Steady-state reverse bias	1042	Condition A, 1,000 hours.	
	Electrical measurements		See table I, subgroup 2.	
*	Steady-state gate bias	1042	Condition B, 1,000 hours	
	Electrical measurements		See table I, subgroup 2.	
	Subgroup 4			Sample size N/A
	Thermal impedance curves		See MIL-PRF-19500.	
	Subgroup 5			
	Not applicable			
	Subgroup 6			11 devices
	Electrostatic discharge sensitivity	1020		
	Subgroup 11			22 devices c = 0
	Test procedure for measuring dv/dt during reverse recovery of power MOSFET transistors	3476	Test conditions shall be derived by the manufacturer.	

1/ JANHC and JANKC devices are qualified in accordance with appendix G of MIL-PRF-19500.
2/ A separate sample for each test may be selected.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:53Z
Check the source to verify that this is the current version before use.


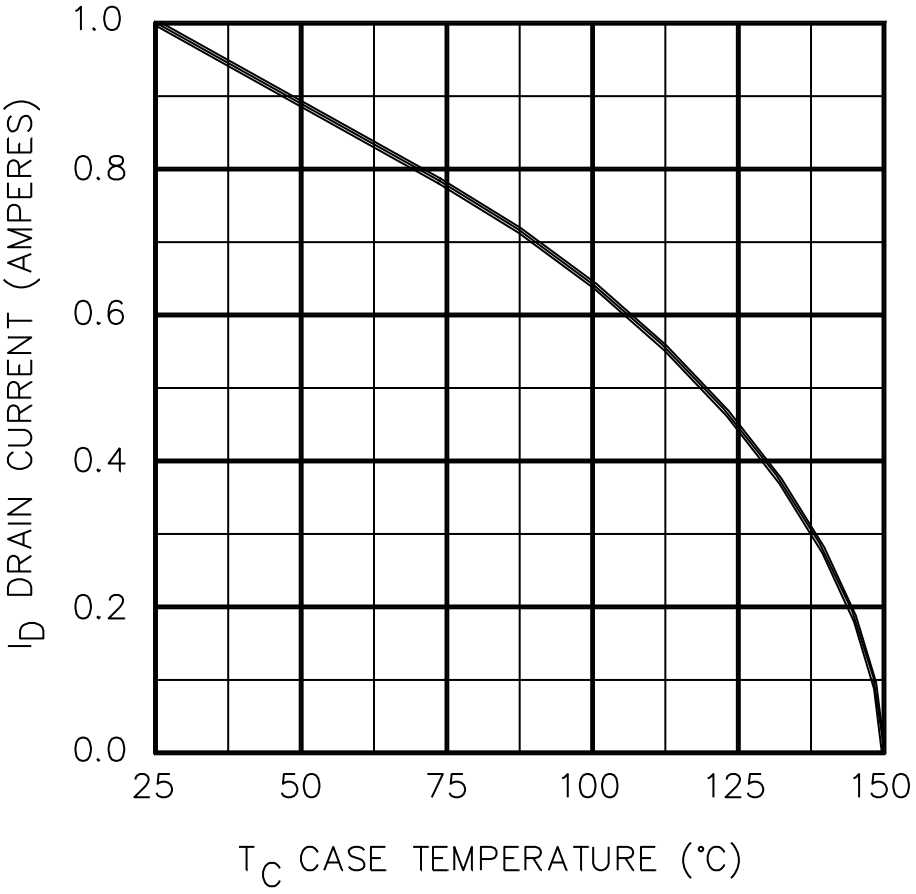


FIGURE 4. Maximum drain current versus case temperature.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:53Z
Check the source to verify that this is the current version before use.

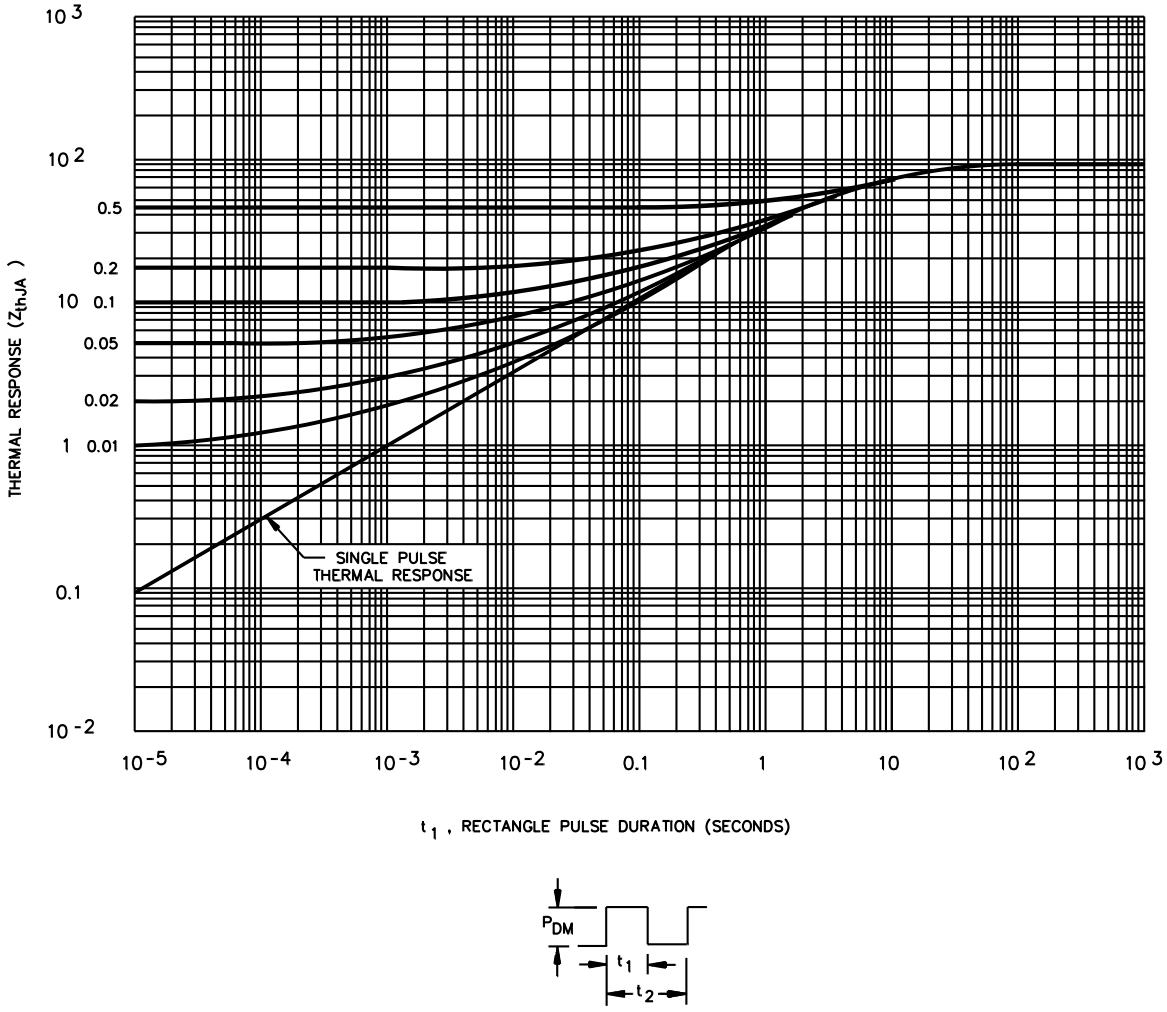


NOTES:

1. The curves are from bottom to top are: Single pulse, D = 0.01, D = 0.02, D = 0.05, D = 0.1, and D = 0.5.
2. Pulse duration magnitude = P_{DM}.
3. Duty factor D = t_1 / t_2.
4. Peak T_J = P_{DM} x Z_{thJA} + T_C.
5. Thermal impedance, junction to ambient = Z_{thJA} = $Z_{\theta JA}$.

FIGURE 5. Thermal response curves.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:53Z
Check the source to verify that this is the current version before use.

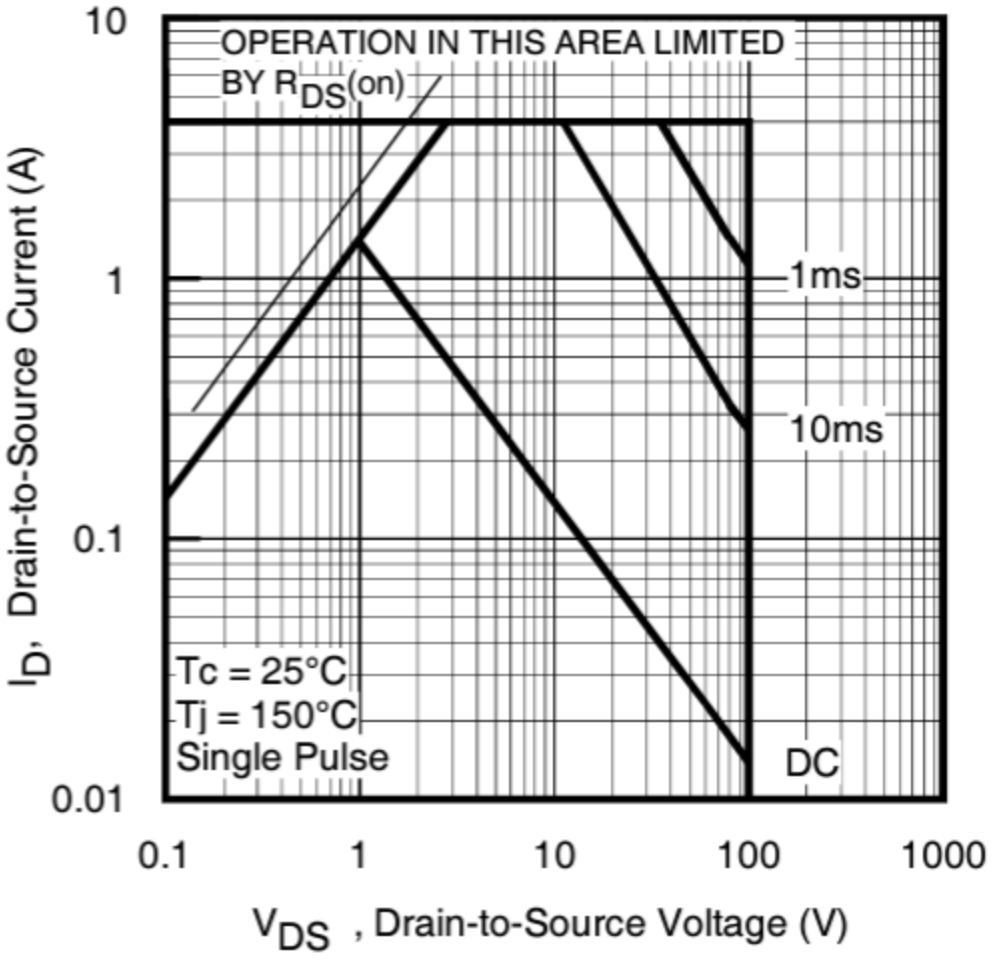

* FIGURE 6. Safe operating area.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:53Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the Military Service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory. The notes specified in MIL-PRF-19500 are applicable to this specification.)

6.1 Intended use. Semiconductors conforming to this specification are intended for original equipment design applications and logistic support of existing equipment.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Packaging requirements (see 5.1).

c. Lead finish (see 3.4.1).


d. The complete PIN, see 1.5, 6.4 and 6.5.

e. For die acquisition, the JANHC or JANKC letter version shall be specified (see figures 2 and 3).

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List (QML-19500) whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from DLA Land and Maritime, ATTN: VQE, P.O. Box 3990, Columbus, OH 43218-3990 or e-mail vqe.chief@dla.mil. An online listing of products qualified to this specification may be found in the Qualified Products Database (QPD) at https://qpldocs.dla.mil.


6.4 PIN construction example.

6.4.1 Encapsulated devices The PINs for encapsulated devices are constructed using the following form.

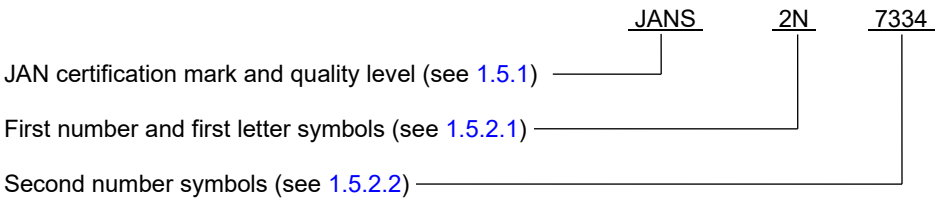

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:53Z
Check the source to verify that this is the current version before use.

6.4.2 Un-encapsulated devices. The PINs for un-encapsulated devices are constructed using the following form.

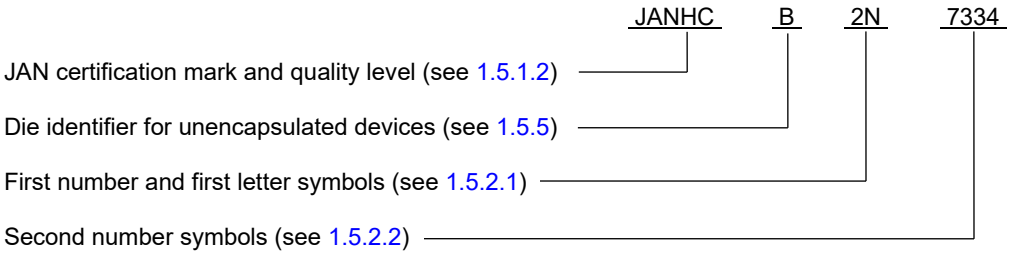

6.5 List of PINs.

6.5.1 Encapsulated devices. The following is a list of possible PINs available for encapsulated devices covered by this specification sheet.

JAN2N7334
JANTX2N7334
JANTXV2N7334
JANS2N7334

6.5.2 Unencapsulated devices. The following is a list of possible PINs available for unencapsulated devices (die) covered by this specification sheet.

JANHCA2N7334	JANHCB2N7334
JANKCA2N7334	JANKCB2N7334

6.6 Suppliers of JANHC and JANKC. The qualified JANHC and JANKC die suppliers with the applicable letter version (example JANHCA2N7334) will be identified on the QML.

PIN	Manufacturer	Manufacturer
	69210	43611
2N7334	JANHCA2N7334 (1) JANKCA2N7334 (1)	JANHCB2N7334 (1) JANKCB2N7334 (1)

(1) The JANHC2N7334 and the JANKC2N7334 die were never qualified for listing on QML-19500.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:53Z
Check the source to verify that this is the current version before use.

6.7 Substitution information. Devices covered by this specification are substitutable for the manufacturers' and users' PIN. This information in no way implies that manufacturers' part or identifying numbers are suitable as a substitute for the military PIN's.

Military PIN	Manufacturer's CAGE code	Manufacturer's and user's PIN
2N7334	69210	IRFG110

6.8 Package identifier. Package designator MO-036AB used in previous issues of this specification sheet was rescinded in JEDEC Publication JEP95 "Registered and Standard Outlines for Solid state and Related Products" dated March 1997. The superseding package is identified as MS-030AB which has identical dimensions and notes.

6.9 Request for new types and configurations. Requests for new device types or configurations for inclusions in this specification sheet should be submitted to: DLA Land and Maritime, ATTN: VAC, Post Office Box 3990, Columbus, OH 43218-3990 or by electronic mail at "Semiconductor@dla.mil" or by facsimile (614) 693-1642 or DSN 850-6939.

6.10 Amendment notations. The margins of this specification are marked with asterisks to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodians:
Army – CR
* Navy – SH
Air Force – 85
NASA – NA
DLA – CC

Review activities:
Army – MI, SM
Navy – MC
Air Force – 19

Preparing activity:
DLA – CC

(Project 5961-2023-103)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:53Z
Check the source to verify that this is the current version before use.