MILITARY SPECIFICATION SHEET

SOCKET, PLUG-IN ELECTRONIC COMPONENTS, ROUND STYLE (TO8)

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the socket described herein shall consist of this specification sheet and the latest issue of MIL-S-83502.

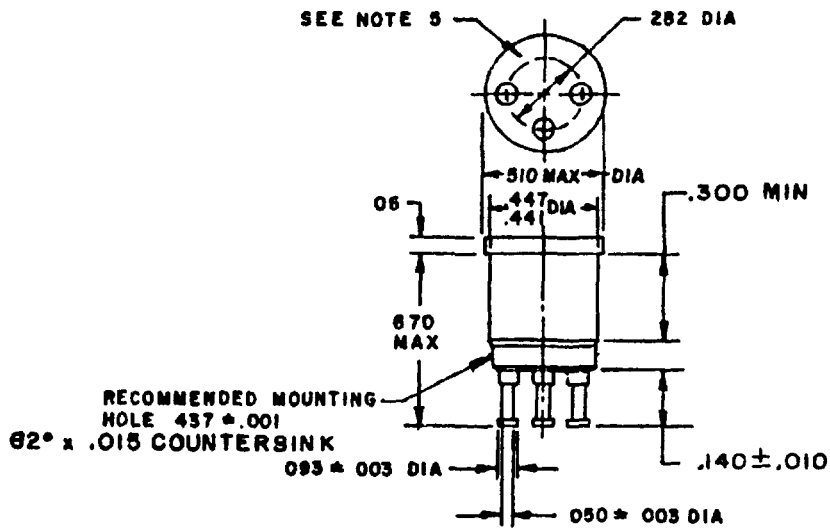

INCHES	MM	INCHES	MM
.001	.03	.140	3.56
.003	.08	.282	7.16
.010	.25	.300	7.62
.015	.38	.437	11.10
.050	1.27	.44	11.18
.06	1.5	.447	11.35
.093	2.36	.510	12.95
		.670	17.02

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm).
4. Device to accept leads, .030 +.003 (.76 +.08 mm) diameter x .250 (6.35 mm). Contact shall be made at or before reaching a depth of .190 (4.83 mm).
5. All other marking shall be on the package.

FIGURE 1. Dimensions and configurations.

(1) denotes change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:19Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and construction

Dimensions and configuration See figure 1.

Termination Type III (wire turret).

Mounting See figure 1

(C) Mating force 8.0 pounds.

(C) Retention force 8.5 pounds

Material

Body Polytetrafluoroethylene per MIL-P-19468.

(C) Socket terminal (one piece construction) Beryllium copper per QQ-C-530, finish gold (30 microinches minimum) in accordance with MIL-S-83502.

(C) Sleeve finish Gold over nickel plating in accordance with MIL-S-83502.

Part number M83502/3-001

Custodians
Army - CR
Navy - EC
Air Force - 85

Review activities
Army - AR, MI
Navy - SH
Air Force - 11, 17, 99
DLA - ES

User activities
Army - ME, AT, AV
Navy - MC, AS
Air Force - 19

Agent
DLA - ES

Preparing activity
Air Force - 85

(Project 5935-3274-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:19Z
Check the source to verify that this is the current version before use.