INCH-POUND

MIL-PRF-83502/3D
3 July 1997
SUPERSEDING
MIL-S-83502/3C
30 September 1981

PERFORMANCE SPECIFICATION SHEET

SOCKETS PLUG-IN ELECTRONIC COMPONENTS, ROUND STYLE (T08)

This specification is approved for use by all Departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-PRF-83502.

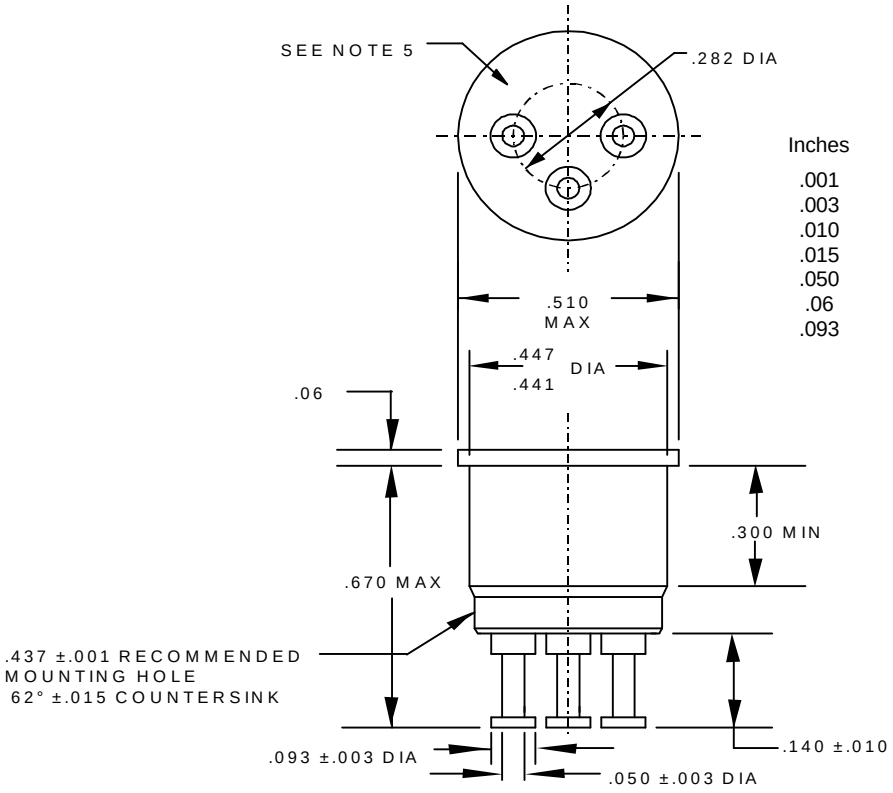

Inches	mm	Inches	mm
.001	0.03	.140	3.56
.003	0.08	.282	7.16
.010	0.25	.300	7.62
.015	0.38	.437	11.10
.050	1.27	.44	11.18
.06	1.5	.447	11.35
.093	2.36	.510	12.95
		.670	17.02

NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).
4. Device to accept leads; .030 ±.003 inch (0.76 ±0.08 mm) diameter x .250 inch (6.35 mm).
5. All other marking shall be on the package.

FIGURE 1. Dimensions and configuration.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:19Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

Reference material: (see 3.1.1 of MIL-PRF-83502).

Body: Shall have an equivalent or better material than PTFE (polytetrafluoroethylene) in accordance with MIL-P-19468.

Contact: Beryllium Copper in accordance with ASTM B139, ASTM B194, ASTM Be, or C spinodal alloy in accordance with ASTM B740.

Contact finish: Gold (30 microinches minimum) over nickel in accordance with MIL-PRF-83502.

Terminal: Brass in accordance with ASTM B16.

Sleeve finish: Gold over nickel plating in accordance with MIL-PRF-83502.

TABLE I. Dash numbers and characteristics.

Dash number M83502/3-	Number of contacts	Termination type	Mating force (maximum) lbs (kg)	Retention force (minimum) lbs (kg)
001	3	IV	8.0 (3.63)	8.5 (3.86)

Part or identifying number (PIN): The PIN shall consist of the basic number of this specification sheet and the dash number from table I.

Example

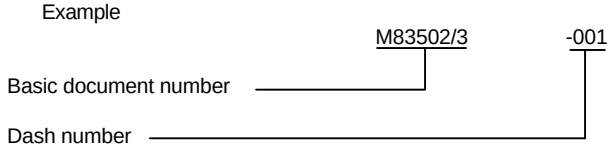

The Government PIN, specified in table III, supersedes the following commercial part numbers.

TABLE III. Supersession and cross reference data.

Active government PIN	CAGE 91506
M83502/3-001	M8070-1G1

NOTE: Revision letters are not used due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:19Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodian:
Navy - EC
ARMY - CR
Air Force - 85

Preparing activity:
DLA - CC

(Project 5935-4034-03)

Review activity:
Navy - AS, MC, SH
Air Force - 11, 19, 99
Army - AR, AT, AV, MI, ME

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:19Z
Check the source to verify that this is the current version before use.