INCH-POUND

MIL-PRF-83502/5C
3 July 1997
SUPERSEDING
MIL-S-83502/5B
30 September 1981

PERFORMANCE SPECIFICATION SHEET
SOCKETS PLUG-IN ELECTRONIC COMPONENTS, ROUND STYLE
(R052)

This specification is approved for use by all Departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-PRF-83502.

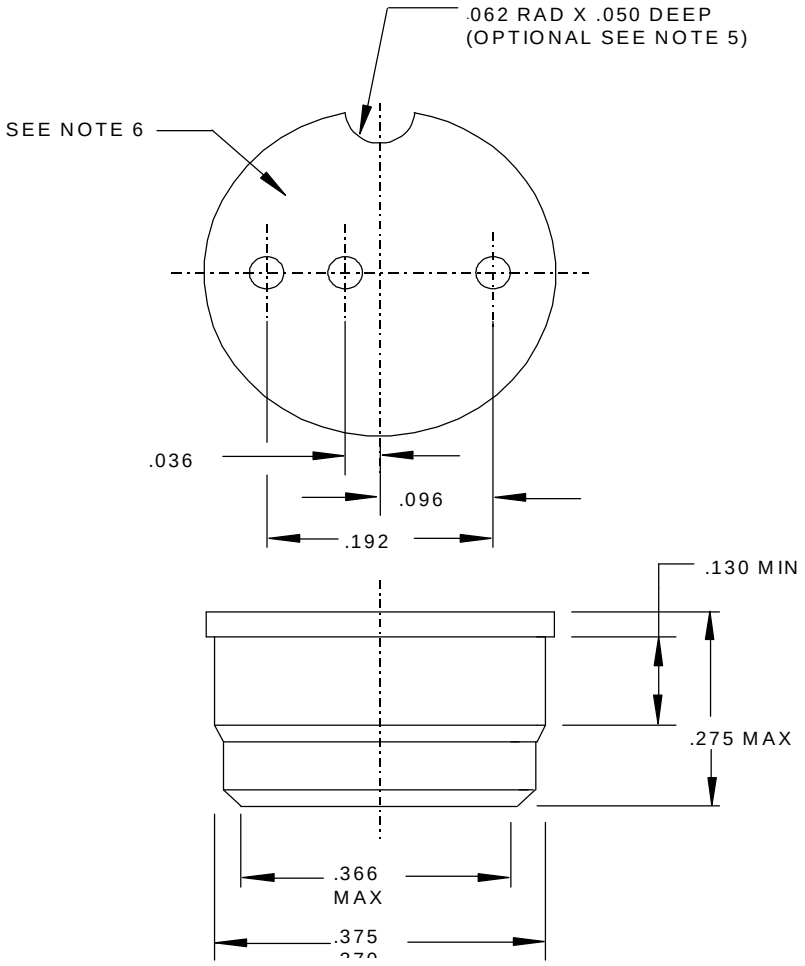

FIGURE 1. Dimensions and configuration.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:20Z
Check the source to verify that this is the current version before use.

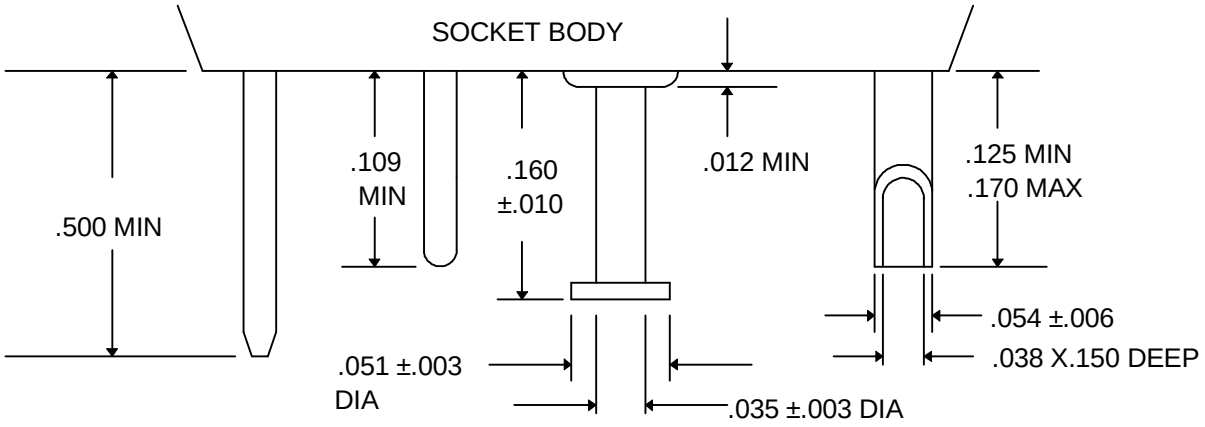

TERMINATION STYLES, TYPE I, TYPE II, TYPE III, TYPE IV.

TERMINAL DIMENSION

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.003	0.08	.036	0.91	.096	2.44	.192	4.88
.006	0.15	.038	0.97	.109	2.77	.200	5.08
.010	0.25	.050	1.27	.125	3.18	.275	6.98
.012	0.30	.051	1.30	.130	3.30	.366	9.30
.015	0.38	.054	1.37	.140	3.56	.370	9.40
.017	0.43	.057	1.45	.150	3.81	.375	9.52
.025	0.64	.06	1.5	.160	4.06	.406	10.31
.035	0.89	.062	1.57	.170	4.32	.500	12.70

NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).
4. Device to accept leads; .016 to ..020 inch (0.41 to 0.51 mm) diameter x .190 ±.030 inch (4.83 ±0.76 mm). Contact shall be made at or before reaching a depth of .100 inch (2.54 mm).
5. A visual polarization index to be provided.
6. All other marking shall be on the package.
7. Recommended mounting hole .366/.369 inch (9.30/9.37 mm).

FIGURE 1. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:20Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

Termination styles: Type I, type II, type III, type IV, see table I.

Mounting: See figure 1.

Temperature rating: +125° C.

Reference material: (see 3.1.1 of MIL-PRF-83502).

Body: Shall have an equivalent or better material than PTFE (polytetrafluoroethylene) in accordance with MIL-P-19468.

Contact: Beryllium Copper in accordance with ASTM B139, ASTM B194, ASTM B103, or C729000 spinodal alloy in accordance with ASTM B740.

Contact and sleeve finish: Gold over nickel in accordance with MIL-PRF-83502.

Terminal: Brass in accordance with ASTM B16.

Mating force: 2.5 pounds (1.13 kg) maximum.

Retention force: 3.0 pounds (1.36 kg) minimum.

Part or identifying number (PIN): The PIN shall consist of the basic number of this specification sheet and the dash number from table I.

Example

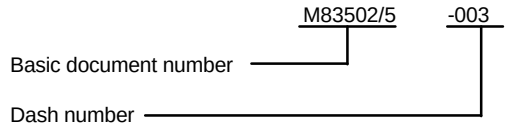

TABLE I. Termination style.

Dash number	Termination style
-003	Wire wrapping post, type I
-011	Printed circuit, type II
-013	Turrent, type III
-015	Solder pocket, type IV

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:20Z
Check the source to verify that this is the current version before use.

TABLE II. Supersession data.

Old part number M83502	Superseded by M83502
/5-011 /5-013 /5-015	/2-010 /2-011 /2-012

The Government PIN, specified in table III, supersedes the following commercial part numbers.

TABLE III. Supersession and cross reference data.

Active government PIN	CAGE 91506
M83502/5-003 M83502/5-011 M83502/5-013 M83502/5-015	8058-43G1 8058-1G33 TBD 8058-1G18

NOTE: Revision letters are not used due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodian:
Navy - EC
ARMY - CR
Air Force - 85

Preparing activity:
DLA - CC

(Project 5935-4034-04)

Review activity:
Navy - AS, MC, SH
Air Force - 11, 17, 19, 99
Army - AR, AT, AV, ME, MI

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:20Z
Check the source to verify that this is the current version before use.