MILITARY SPECIFICATION SHEET

SOCKET, PLUG-IN ELECTRONIC COMPONENTS, ROUND STYLE (T060)

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the socket described herein shall consist of this specification sheet and the latest issue of MIL-S-83502.

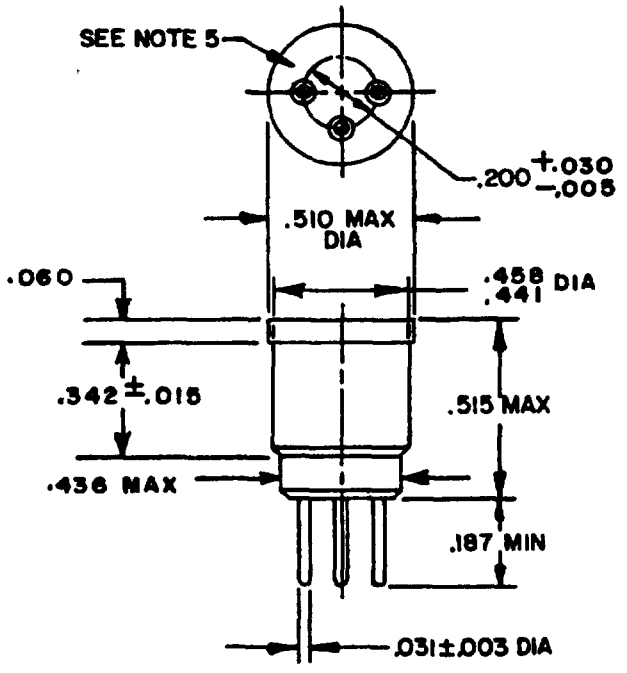

INCHES	MM
.003	.08
.005	.12
.015	.38
.030	.76
.031	.79
.060	1.52
.187	4.75
.200	5.08
.342	8.69
.436	11.07
.441	11.20
.458	11.63
.510	12.95
.515	13.08

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm).
4. Device to accept leads, .040 ±.002 (1.02 ±.05 mm) diameter pins. Contact shall be made at or before reaching a depth of .100 (2.54 mm).
5. Marking shall be on the package.
6. Recommended mounting hole: .437 (11.10 mm) ±.001 (.03 mm), with 82° x .015 (.38 mm) deed countersink.

FIGURE 1. Dimensions and configuration.

Ⓒ denotes change

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:20Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1.

Termination: Type II (printed circuit).

Mounting: See figure 1.

(C) Mating force: 16.0 pounds.

(C) Retention force: 16.5 pounds.

Material:

Body: Polytetrafluoroethylene per MIL-P-19468.

Contact: Phosphor bronze per QQ-B-750, composition A; spring temper.

(C) Socket terminal (one piece construction): Phosphor bronze per QQ-B-750, spring temper, finish gold (30 microinches minimum) in accordance with MIL-S-83502.

Part number: M83502/8-001.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - SH
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - ME, AT, AV
Navy - MC, AS
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Air Force - 85

(Project 5935-3274-6)

Source: https://assist.dla.mil -- Downloaded: 202610-23T08:20Z
Check the source to verify that this is the current version before use.