DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

AN152001 THRU AN152300

FSC 5307

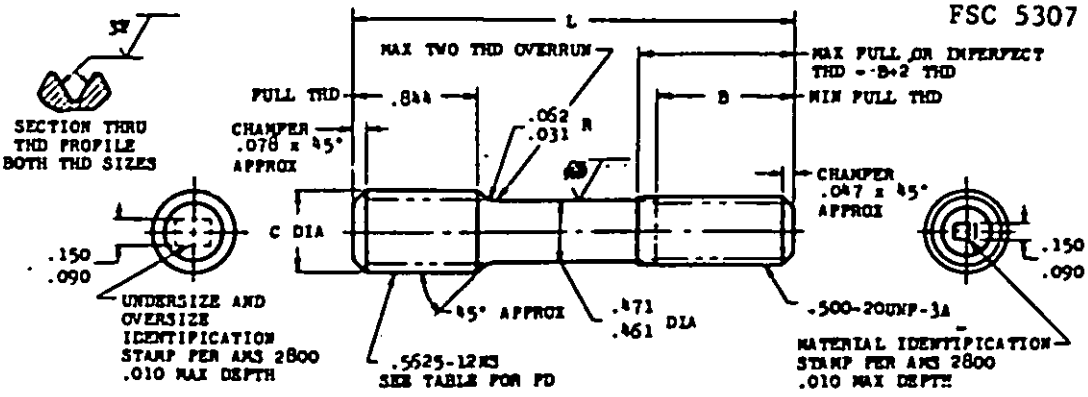

UNDERSIZE AND OVERSIZE IDENTIFICATION		-.003 (-3)	STANDARD	+.003 (3)	+.006 (6)	+.009 (9)	+.012 (12)
C		.557- .562	.557- .562	.557- .562	.557- .562	.566- .571	.566- .571
PD BEFORE PLATING		.5104-.5114	.5134-.5144	.5154-.5174	.5194-.5204	.5224-.5234	.5254-.5264
PD AFTER PLATING		.5109-.5124	.5139-.5154	.5169-.5184	.5199-.5214	.5229-.5244	.5259-.5274
PD LEAD THREAD		.5034-.5054	.5064-.5084	.5094-.5114	.5124-.5144	.5154-.5174	.5184-.5204
L	B	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
1.719	.750	AN152019	AN152020	AN152021	AN152022	AN152023	AN152024
1.781	.812	AN152025	AN152026	AN152027	AN152028	AN152029	AN152030
1.844	.875	AN152031	AN152032	AN152033	AN152034	AN152035	AN152036
1.906	.875	AN152037	AN152038	AN152039	AN152040	AN152041	AN152042

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.

MATERIAL: STEEL AMS 6320 (AMS 6320 MATERIAL MAY ALSO BE USED FOR THIS PART UNTIL JANUARY 1, 1957).
HARDNESS: ROCKWELL C26-32.
FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
SURFACE ROUGHNESS: AS 107.
MANUFACTURING SPECIFICATION: AMS 7456. PARTS SUBJECT TO MAGNETIC INSPECTION PER AMS 2640.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES: LINEAR DIMENSIONS ±.010.

(2) INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972. NO SUPERSEDING STANDARD.
DO NOT USE UNASSIGNED PART NUMBERS.

(4) CANCELED AS OF 9 OCT 87

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 19 May 50 REVISED (1) 25 Mar 55 (2) 26 Oct 72 (4) 9 OCT 87

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN152001 THRU AN152300
NONE	STUD-STEPPED, 1.5 DIA ENGAGEMENT, .5625-12 x .500-20	

E-25-121

Project 5307-0370

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:27Z
Check the source to verify that this is the current version before use.