A-A-50009B
February 23, 1989
SUPERSEDING
A-A-50009A
April 15, 1988

COMMERCIAL ITEM DESCRIPTION

GRIDDLE, SELF-HEATING, ELECTRIC, STAND MOUNTED

The General Services Administration has authorized the use of this commercial item description in preference to type II, size 2, styles 1 and 2 of MIL-G-2338.


1. CLASSIFICATION

1.1 Classification. This commercial item description covers five types and two styles of griddle as follows (see 5.2):

Type I - 208 volts, 60 hertz, 1 phase
Type II - 208 volts, 60 hertz, 3 phase
Type III - 208/230 volts, 60 hertz, 3 phase
Type IV - 220 volts, 50 hertz, 1 phase
Type V - 380 volts, 50 hertz, 3 phase

Style 1 - Plain legs
Style 2 - Castered legs

1.2 Part identification number. The part identification number shall consist of the commercial item description number, type number, and the style number, as follows:

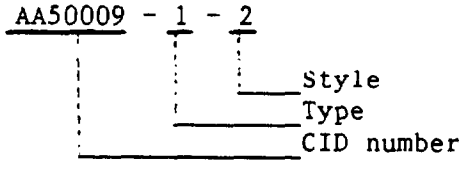


2. SALIENT CHARACTERISTICS.

2.1 Type I, style 2. The type I, style 2 griddle shall consist essentially of a griddle top supported by a wraparound stainless steel body that houses the heating elements, thermostats, and grease drawer with baffles, mounted on a stand. The griddle surface top shall be smooth with a minimum thickness of 1/2 inch. Effective griddle surface area shall be a minimum of 805 square inches (36 inches by 24 inches deep). Exterior body, splash guard, and grease receptacle shall be fabricated from stainless steel. The grease receptacle shall have a capacity of not less than 4 quarts. The griddle surface top



DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202640-26T08:37Z
Check the source to verify that this is the current version before use.

shall be equipped with a built-in grease gutter which shall drain into the grease receptacle. The grease receptacle shall be rigidly supported, designed to reduce splashing, and provided with a handle to facilitate removal. The griddle shall have a minimum of three heat zones, each controlled by an individual thermostat. Thermostatic dials shall have graduations at intervals not greater than 25°F with a minimum operating range of 200°F to 450°F. All operating controls shall be conveniently located on the front panel and shall be either recessed or provided with guard(s) to prevent damage from mobile equipment. Each thermostat shall have a signal light that glows when the heating element is drawing current and goes out when the set temperature is reached. The griddle shall be capable of pre-heating to 350°F in a minimum of 12 minutes. A splash guard shall be provided on the back and two sides of the cooking surface. The splash guard shall be not less than 3 inches high on the back and may be tapered to the front on the sides. The splash guard shall be continuously welded to the griddle place to prevent cooking oil from seeping into the interior of the griddle. The griddle shall be designed to operate on the following electrical power sources:

Type I - 208 volts, 60 hertz, 1 phase
Type II - 208 volts, 60 hertz, 3 phase
Type III - 208/230 volts, 60 hertz, 3 phase
Type IV - 220 volts, 50 hertz, 1 phase
Type V - 380 volts, 50 hertz, 3 phase

Power consumption shall be a minimum of 16 kW and a maximum of 20 kW. The stand shall be of the open frame type design, and shall be entirely fabricated from stainless steel, including the undershelf. The stand shall be furnished as either a separate unit or an integral part of the griddle, so constructed that the griddles can be banked together in battery alignment. When the stand is furnished separately, means shall be provided to firmly secure the griddle to the stand and allow for easy removal of the griddle. The stand shall be capable of supporting the griddle and a uniformly distributed load of 200 pounds placed on the cooking surface and moved a distance of 10 feet without damge or deformity to the griddle or stand. The stand shall be equipped with four heavy-duty, 5-inch diameter casters, two of which shall be of the swivel type. Two of the four casters shall be equipped with brakes. The overall dimensions shall not exceed 37 inches wide by 32 inches deep. The height from the floor to the top of the griddle surface shall be a minimum of 34 inches. The griddle shall comply with Underwriters Laboratories (UL) Standard No. 197 and National Sanitation Foundation (NSF) Standard No. 4. The griddle stand shall comply with NSF Standard No. 2 or No. 4.

2.2 Type II, style 2. The type II, style 2 griddle shall conform to all of the requirements for type I, style 2 griddle except that the griddle shall be designed to operate on a 208 volt, 60 hertz, 3 phase power source.

2.3 Type III, style 2. The type III, style 2 griddle shall conform to all of the requirements for the type I, style 2 griddle except that the griddle shall be designed to operate on a 208/230 volt, 60 hertz, 3 phase power source.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:37Z
Check the source to verify that this is the current version before use.

2.4 Type IV, style 2. For type IV, style 2 griddle shall conform to all of the requirements for the type I, style 2 griddle except that the griddle shall be designed to operate on a 220 volt, 50 hertz, single phase power source.

2.5 Type V, style 2. The type V, style 2 griddle shall conform to all of the requirements for the type I, style 2 griddle except that the griddle shall be designed to operate on a 380 volt, 50 hertz, 3 phase power source.

2.6 Type I, style 1. The type I, style 1 griddle shall conform to all of the requirements for the type I, style 2 griddle except that the griddle shall be equipped with plain legs in lieu of castered legs.

2.7 Type II, style 1. The type II, style 1 griddle shall conform to all of the requirements for the type II, style 2 griddle except that the griddle shall be equipped with plain legs in lieu of castered legs.

2.8 Type III, style 1. The type III, style 1 griddle shall conform to all of the requirements for the type III, style 2 griddle except that the griddle shall be equipted with plain legs in lieu of castered legs.

2.9 Type IV, style 1. The type IV, style 1 griddle shall conform to all of the requirements for the type IV, style 2 griddle except that the griddle shall be equipted with plain legs in lieu of castered legs.

2.10 Type V, style 1. The type V, style 1 griddle shall conform to all of the requirements for the type V, style 2 griddle except that the griddle shall be equipted with plain legs in lieu of castered legs.

2.11 Finish. The stainless steel front and side panels shall have a No. 3 finish or better.

2.12 Data name plate (Government unique requirement (see 5.4)). The griddle shall be furnished with a data name plate in accordance with the applicable requirements of MIL-STD-130 except the requirements for: (a) Methods of applying, (b) Identification tags, (c) Information not required, and (d) Optional marking information shall not apply. The data name plate shall be made of minimum 20 gage corrosion-resisting metal and attached to the griddle by rivets, screws, or by welding in such a manner as to meet the applicable National Sanitation Foundation sanitary requirements for this equipment. The plate shall contain the following information which shall be stamped, engraved, or applied by photosensitive means:

National Stock Number
Procurement Contract Number
Specification Data
Manufacturer's Name, Address, and Telephone Number
Supplier's Name, Address, and Telephone Number (List only if different from Manufacturer)
Manufacturer's Model Number
Government Approved Manual Number (when specified see 5.2)



Source: https://assist.dla.mil -- Downloaded: 202640-26T08:37Z
Check the source to verify that this is the currentversion before use.

Each plate shall be placed so that it is readily visible to the operator during normal operating use and so as to not adversely affect the life and utility of the griddle.

## 3. QUALITY ASSURANCE

3.1 Certification. The contractor shall certify that the product offered meets the salient characteristics and requirements of the description and, except for those government unique requirements specified, conforms to the producer's own drawings, specifications, standards, and quality assurance practices, and is the same as the product offered for sale in the commercial marketplace. The contractor shall certify the product meets the "Government unique" requirements except when specific quality assurance provisions are specified for the Government unique requirements. When specific quality assurance provisions are cited, the contractor shall provide data resulting from inspection conducted in accordance with the specified quality assurance provisions. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

## 4. PACKAGING

4.1 Packaging and packing. Packaging and packing shall be commercial or export, as specified (see 5.2).

4.2 Commercial packaging and packing. Each griddle shall be cleaned, preserved, packaged, packed, and unitized in accordance with ASTM D 3951.

4.3 Export packaging and packing.

4.3.1 Export packaging. Each griddle shall be cleaned, preserved, and cushioned to protect against corrosion, deterioration, and physical damage during shipping and storage. Disassembled parts and accessories shall be packaged in a fiberboard box conforming to type CF or SF, class domestic, style optional of PPP-B-636.

4.3.2 Export packing. Each griddle with its packaged parts shall be packed in a wood-cleated plywood box conforming to type domestic, style optional of PPP-B-601 or in a wood-cleated fiberboard box conforming to class II of PPP-B-591. Each box shall be waterproofed with a sealed case liner conforming to type I, II, or IV, grade optional of MIL-L-10547. Each box shall be closed and strapped in accordance with PPP-B-601 or PPP-B-591, as applicable.

4.3.3 Palletization. When specified (see 5.2), shipping containers shall be palletized in accordance with MIL-STD-147.

4.4 Marking (commercial and export). Marking of unit packs, shipping containers, and palletized unit loads shall be in accordance with MIL-STD-129 or ASTM D 3951, as applicable.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:37Z
Check the source to verify that this is the current version before use.

5. NOTES

5.1 Intended use. Self-heating, stand-mounted, electric griddles are intended for use in kitchens to grill various foods.

5.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this document.
b. Type and style of griddle required (see 1.1).
c. Government approved manual number to be included on the data name plate when manuals are purchased under the contract (see 2.12).
d. Selection of applicable packaging and packing (see 4.1).
e. When palletization of shipping containers is required (see 4.3.3).

5.3 Sources of documents.

5.3.1 Sources for nongovernment association documents.

UL Standard No. 197 - Commercial Electric Cooking Appliances is available from:

Underwriters Laboratories, Inc. (UL)
333 Pfingsten Road
Northbrook, IL 60062

NSF Standard No. 2 - Food Service Equipment; and
NSF Standard No. 4 - Commercial Cooking and Hot Food Storage Equipment are available from:

National Sanitation Foundation (NSF)
3475 Plymouth Road
P.O. Box 1468
Ann Arbor, MI 48106

ASTM D 3951 - Standard Practice for Commercial Packaging is available from:

The American Society for Testing and Materials (ASTM)
1916 Race Street
Philadelphia, PA 19103-1187

5.3.2 Sources of governmental documents.

Military documents are available from:

Naval Publications and Forms Center
5801 Tabor Avenue
Philadelphia, PA 19120



Source: https://assist.dla.mil -- Downloaded: 202610-26T08:37Z
Check the source to verify that this is the currentversion before use.

5.4 Government unique requirements. Whenever "(Government unique requirement)" is included in the title of a paragraph under "salient characteristics," it is meant that the requirement is something that is not normally offered to the commercial marketplace by the manufacturer.

MILITARY INTERESTS:

Custodians

Army - GL
Navy - YD
Air Force - 99

Review Activities

Army - MD, TS
Navy - SA
Air Force - 84
DLA - GS

User Activity

Navy - MC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

PREPARING ACTIVITY:

Army - GL

(Project 7310-0767)



Source: https://assist.dla.mil -- Downloaded: 202610-26T08:37Z
Check the source to verify that this is the current version before use.