A-A-670C
September 26, 1994
SUPERSEDING
A-A-3708
December 19, 1991

COMMERCIAL ITEM DESCRIPTION

BOXES, CORRUGATED FIBERBOARD, RECORDS RETIRING

The General Services Administration has authorized the use of this commercial item description by all Federal Agencies

A SCOPE


This description covers fiberboard boxes to be used for shipping Federal records to the National Archives.

B CLASSIFICATION

The boxes shall be of two styles

Style 1 - Regular slotted box of two sizes, color Tan (See figure 1)
Style 2 - Lock bottom box of two sizes, color White (see figure 2)

FIGURE 1

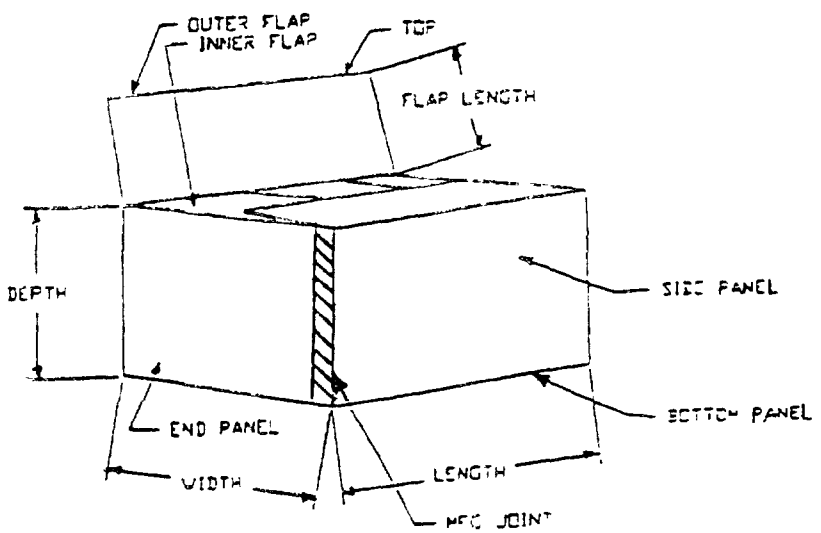

Style 1 - Regular slotted box

Size A - 37.47 x 24.13 x 12.38 cm (14-3/4 x 9-1/2 x 4-7/8")

Size B - 37.47 x 16.51 x 11.43 cm (14-3/4 x 6-1/2 x 4-1/2")

Beneficial comments, recommendations, additions, deletions, clarifications, etc and any data which may improve this document should be sent to The General Services Administration, Federal Supply Service, Engineering Branch, New York, NY 10278

DISTRIBUTION STATEMENT A - Approved for public release, distribution is unlimited

FSC 8115

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:09Z
Check the source to verify that this is the current version before use.

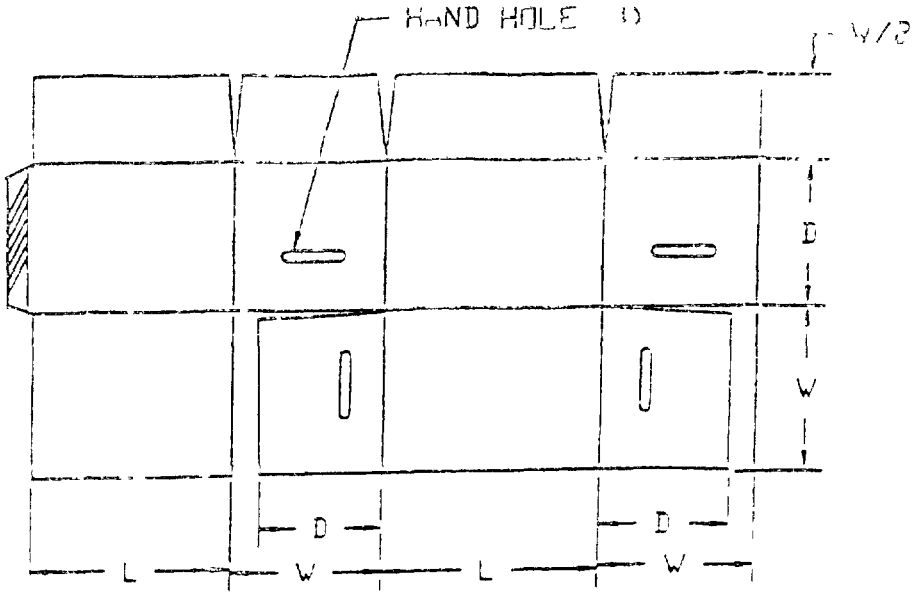


FIGURE 2

L = Length W = Width D = Depth

Style 2 - Lock bottom box (See C 5)

Size C - 37 47 x 30 48 x 24.13 cm (14-3/4 x 12 x 9-1/2")

Size D - 37 47 x 29 85 x 29.85 cm (14-3/4 x 11-3/4 x 11-3/4")

C SALIENT CHARACTERISTICS

C 1 Dimensions Unless otherwise stated, dimensions shall be inside measurements of box, when assembled, given in the sequence of length, width, and depth, with a tolerance of plus or minus 3 175 mm (1/8 inch).

C 2 Fabrication Fiberboard used in the fabrication of the boxes shall be corrugated, in accordance with ASTM D5118, domestic class, single wall, B-flute with a minimum dry bursting strength of 1379 kPa (200 p.s i) for style 1, and 1896 kPa (275 p s i) for style 2

C 3 Box body. Style 1 shall be constructed from one piece of fiberboard scored to form the box Direction of the flutes shall be parallel to the manufacturer's joint Style 2 shall be constructed of one piece of fiber-board as indicated in figure 2

C 4 Joints The manufacturer's joint for both Style 1 and Style 2 shall be fastened with metal staples or stitches spaced not more than 3 81 cm (1-1/2") apart The joint shall be fastened on the end panel Each box shall bear the boxmaker's certificate on the bottom panel of the box

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:09Z
Check the source to verify that this is the current version before use.

Additional requirements. Applies only to Style 2, Size C and Size D

I. On the right hand panel, the following instructions shall be printed in bold lettering, at least 6.35 mm (1/4") high (See Figure 4)

INSTRUCTIONS (1 OF 2)

1 DO NOT OBSCURE BOX NUMBER OR ACCESSION NUMBER WITH TAPE.
2 USE BLACK FELT WIDE-TIP MARKER
3 MAKE NUMBERS 3.81 cm (1-1/2 INCHES) HIGH
4 PACK BOXES WITH RECORDS ONLY
5 LETTER-SIZE FILES MUST BE PLACED IN ORDER BY NAME, NUMBER, OR DATE, FACING THE FRONT OF THE BOX
6 LEGAL-SIZE FILES MUST BE IN ORDER AND FACE THE LEFT SIDE OF THE BOX.
7 LABELS ON MAGNETIC TAPE REELS MUST FACE THE FRONT OF THE MAGNETIC TAPE BOX

II On the left side panel, the following instructions shall be printed in bold lettering, at least 6.35 mm (1/4") high

INSTRUCTIONS (2 OF 2)

8 PRINT THE ACCESSION NUMBER ON THE UPPER LEFT FRONT OF THE BOX THIS THREE-PART NUMBER MUST BE SEPARATED AFTER THE FISCAL YEAR AND PRINTED IN THE BLOCKS PROVIDED FOR EXAMPLE 123-95
0001
9 NUMBER EACH BOX OF FILES CONSECUTIVELY (i e , 1 OF 10, 2 OF 10, etc)
10 IDENTIFY THE FIRST AND LAST FOLDER IN EACH BOX ON THE FRONT OF THE BOX BELOW THE HAND HOLE FOR EXAMPLE ABBOTT - ZIEGLER OR 0001 -9999.

III. On the end panel with the stitched joint, above the hand hole, the following shall be printed in bold letters at least 1.27 cm (1/2 inch) high.

DO NOT WRITE ON THIS END

IV In both end panels, there shall be hand holes through both thicknesses that are 2.54 cm (1 inch) high and 7 62 cm (3 inches) in length The top of the hand holes shall be 10.16 cm (4") below the top of the box The hand holes shall be cut on the bottom and sides only so that the box will have padded hand holes

V. Three blocks shall be printed on the end panel (without the stitched joint) at the corners as shown in Figure 3, also see Figure 4

VI Entire exterior of box shall be white having a minimum brightness of 70% when measured by a brightness meter

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:09Z
Check the source to verify that this is the current version before use.

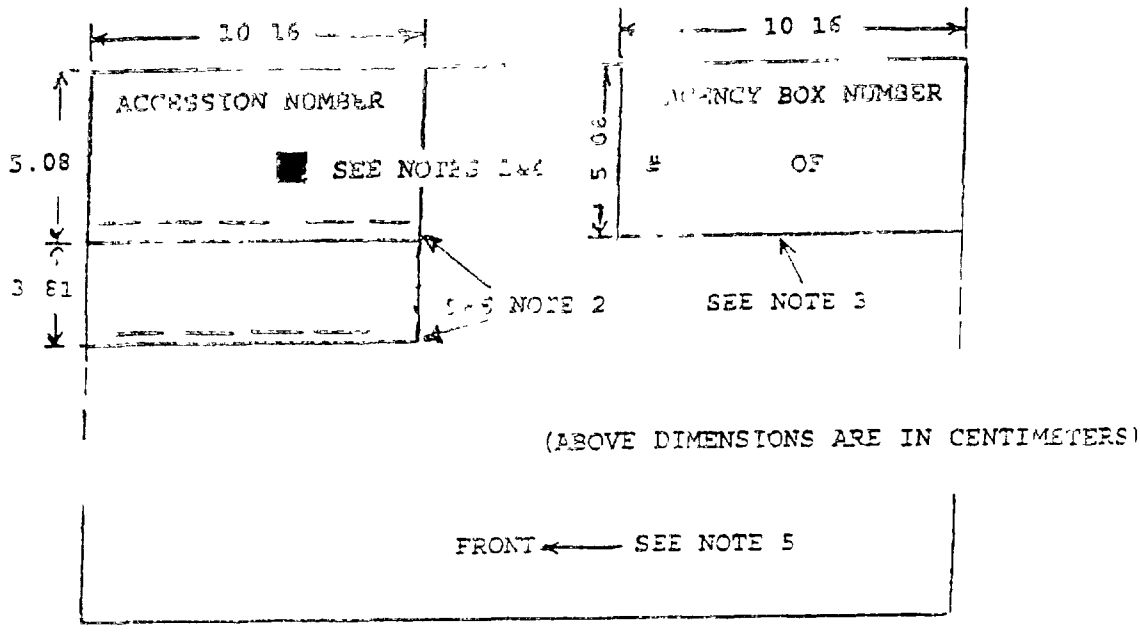


FIGURE 3

NOTE 1 Black square is 6 35 mm (1/4") X 6 35 mm (1/4"), and is centered above space between second and third dash, 3.81 cm (1-1/2") below the top of the box and 6 35 cm (2-1/2") from the left edge of the box.

NOTE 2 Dashes are 3 175 mm (1/8") above solid line and 1.27 cm (1/2") in length, uniformly spaced Five dashes in upper block and four dashes in lower block as shown

NOTE 3 The following two lines shall be printed in bold lettering at least 6.35 mm (1/4") high Bottom of lettering for upper line shall be 2 54 cm (1") from top of box. Lower line is centered 3 81 cm (1 -1/2") below the top of the box with the number sign (#) at the left margin and the word (OF) 5 08 cm (2") from the right side of the box

AGENCY BOX NUMBER
OF

NOTE 4 The following line shall be printed in bold lettering at least 6 35 mm (1/4") high Bottom of lettering shall be 2 54 cm (1") from top of box

ACCESSION NUMBER

NOTE 5 The word "FRONT" shall be printed in bold lettering at least 1.27 cm (1/2") high in the middle of the panel and bottom of lettering 2 54 cm (1") above the bottom edge of the box.

D RECOVERED MATERIAL

D 1 The contractor shall certify that the product supplied contains a minimum of 40% by weight post consumer recovered material as defined in 40 CFR part 250 The contractor shall submit evidence in writing from the mills to [illegible] the percent by weight of the post consumer recovered material content

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:09Z
Check the source to verify that this is the current version before use.

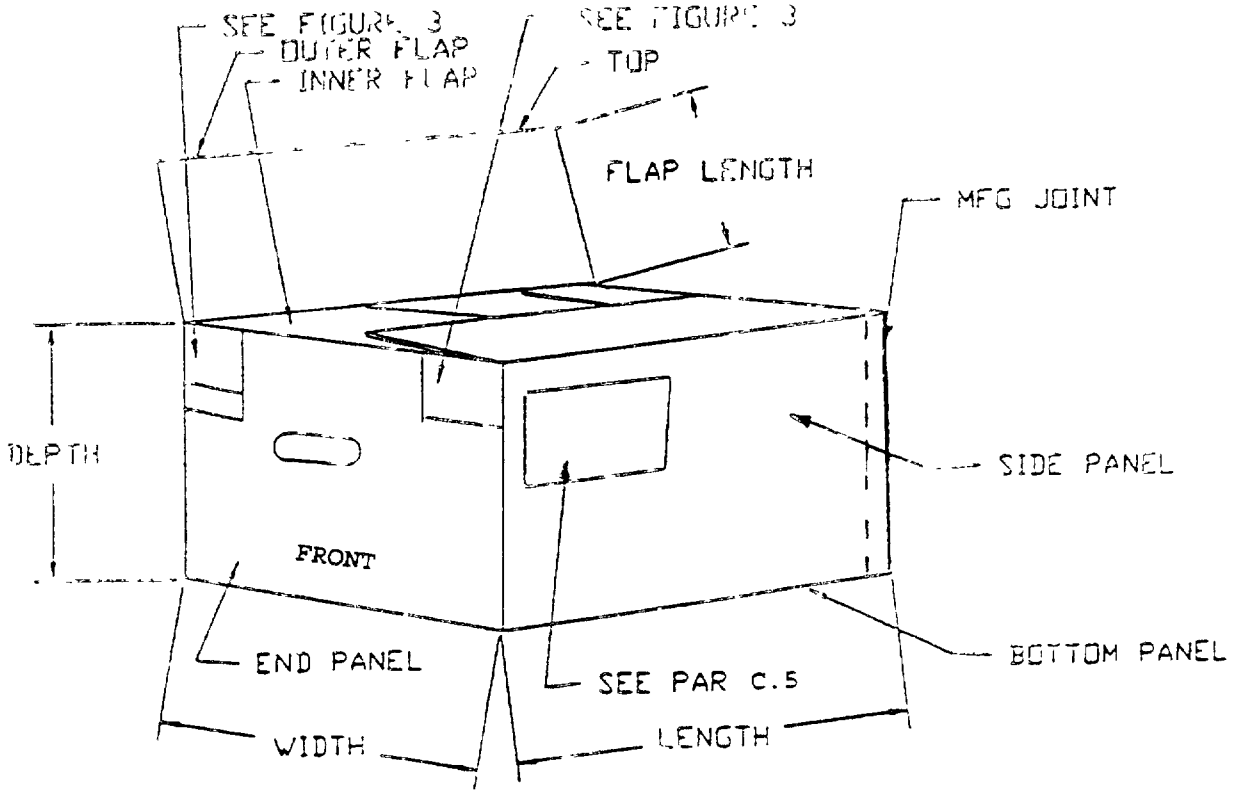


FIGURE 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:09Z
Check the source to verify that this is the current version before use.

D 2 The following statement shall be printed on the outside of each box on the bottom panel

"The fiberboard used in manufacturing this box contains a minimum of 40% by weight post consumer recovered material "

D 3 The following logo shall also be printed on the outside of each box on the bottom panel Black arrows shall be used



Note Size of statement and logo are at the supplier's option

E Workmanship The completed box shall be clean, free of frayed or torn edges, improperly aligned panels, and improper scores and slots All markings shall be clear and legible All dimensions of the boxmaker's blank shall be accurately cut, scored and slotted, allowing easy set-up and ensuring that the assembled box parts fit closely without undue binding No flap shall project beyond an edge of the box by more than 3 175 mm (1/8") when the box is closed All metal fasteners shall be well clinched, flush or below the interior and exterior surfaces of the joined fiberboard The box shall be free from any defect that may affect its appearance, performance, use or cause injury to the end user

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:09Z
Check the source to verify that this is the current version before use.

F QUALITY ASSURANCE

F 1 Contractor Certification - The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this Commercial Item Description, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices. The government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract

F 2 Responsibility for Inspection - Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government The Government reserves the right to perform any of the inspections set forth herein, where such inspections are deemed necessary to assure that supplies and services conform to the prescribed requirements.

F 3 Each lot of boxes shall be inspected for conformance to the requirements herein. Unless otherwise specified, inspection shall be in accordance with MIL-STD-105 using the sampling plans specified below.

F 4 Visual characteristics - Inspection level S-4 with an Acceptable Quality Level (AQL) of 4 0 percent defective The sample unit shall be one box

F 5 Dimensional characteristics - Inspection level S-2 with an Acceptable Quality Level (AQL) of 4.0 percent defective The sample unit shall be one box

F 6 Sampling for testing - In accordance with ASTM D585, using plan II for all properties.

G APPLICATION FOR COPIES OF TECHNICAL DOCUMENTS REFERENCED HEREIN

G 1 The issue date in effect on date of invitation for bids or request for proposal shall apply

G 2 MIL-STD-105 is available from Standardization Documents Order Desk; Building 4D, 700 Robbins Avenue; Philadelphia, PA 19111 -5094

G 3 ASTM D5118 and ASTM D595 are available from the American Society for Testing and Materials, 1916 Race Street , Philadelphia, Pa 19103

G 4 Code of Federal Regulations, Title 40, Part 250 is available from the Superintendent of documents, U.S Government Printing Office, Washington, DC 20402

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:09Z
Check the source to verify that this is the current version before use.

F NOTES

H 1 Preparation for Delivery

Preservation, Packaging, Packing, Labeling and Marking shall be as specified in the contract or purchase order

H 2 Ordering Data·

Purchasers should select the preferred options permitted herein, and include the following information in procurement documents·

A Title, number and date of this commercial item description
B Size of box

H 3 Part Identification Number

The following part identification numbering procedure is for government purposes and does not constitute a requirement for the contractor

AA670 - C This example describes a
| WHITE LOCK BOTTOM BOX, 14 3/4" X 12" X 9 1/2"
|
|
|---Size· A - 14 3/4" X 9 1/2" X 4 7/8", REGULAR SLOTTED, TAN

B - 14 3/4" X 6 1/2" X 4 1/2", REGULAR SLOTTED, TAN

C - 14 3/4" X 12" X 9 1/2", LOCK BOTTOM, WHITE

D - 14 3/4" X 11 3/4" X 11 3/4", LOCK BOTTOM, WHITE

Civil Agency Coordinating Activity
National Archives and Records Administration

No official DOD interest has been registered

Preparing Activity
GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:09Z
Check the source to verify that this is the current version before use.