User activities:
ARMY-AT, ME
NAVY-MC.

Review activities:
ARMY-GL, MI
NAVY-AS

DLA-IS
NSA-NS

FED. SUP CLASS
5320

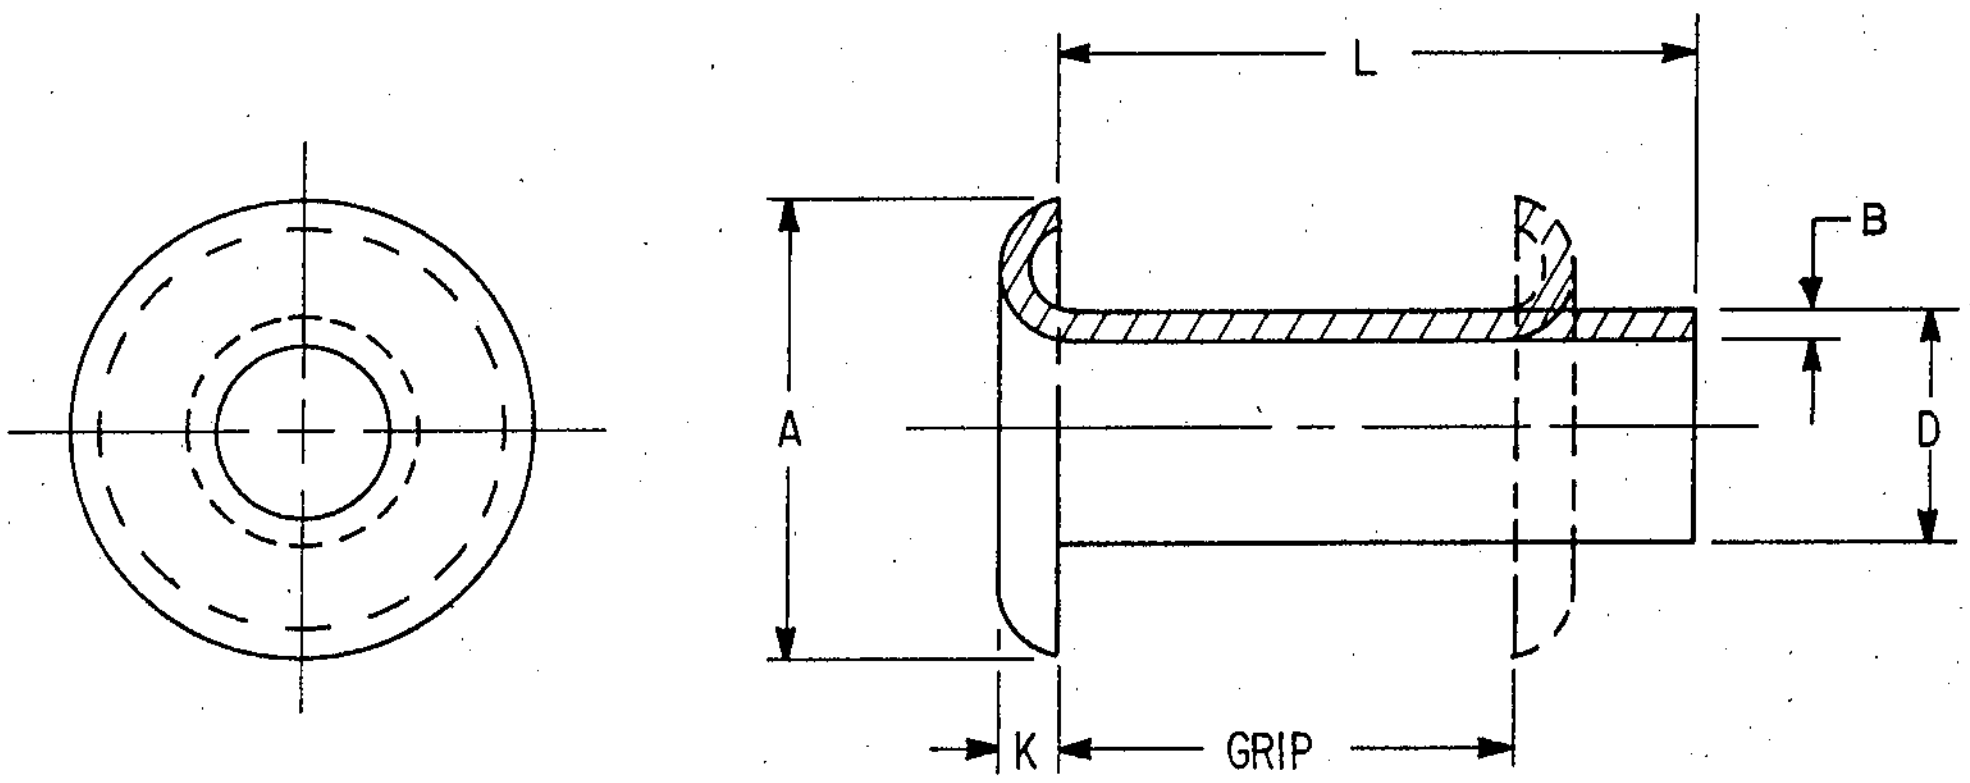

ROUND TYPE HEAD

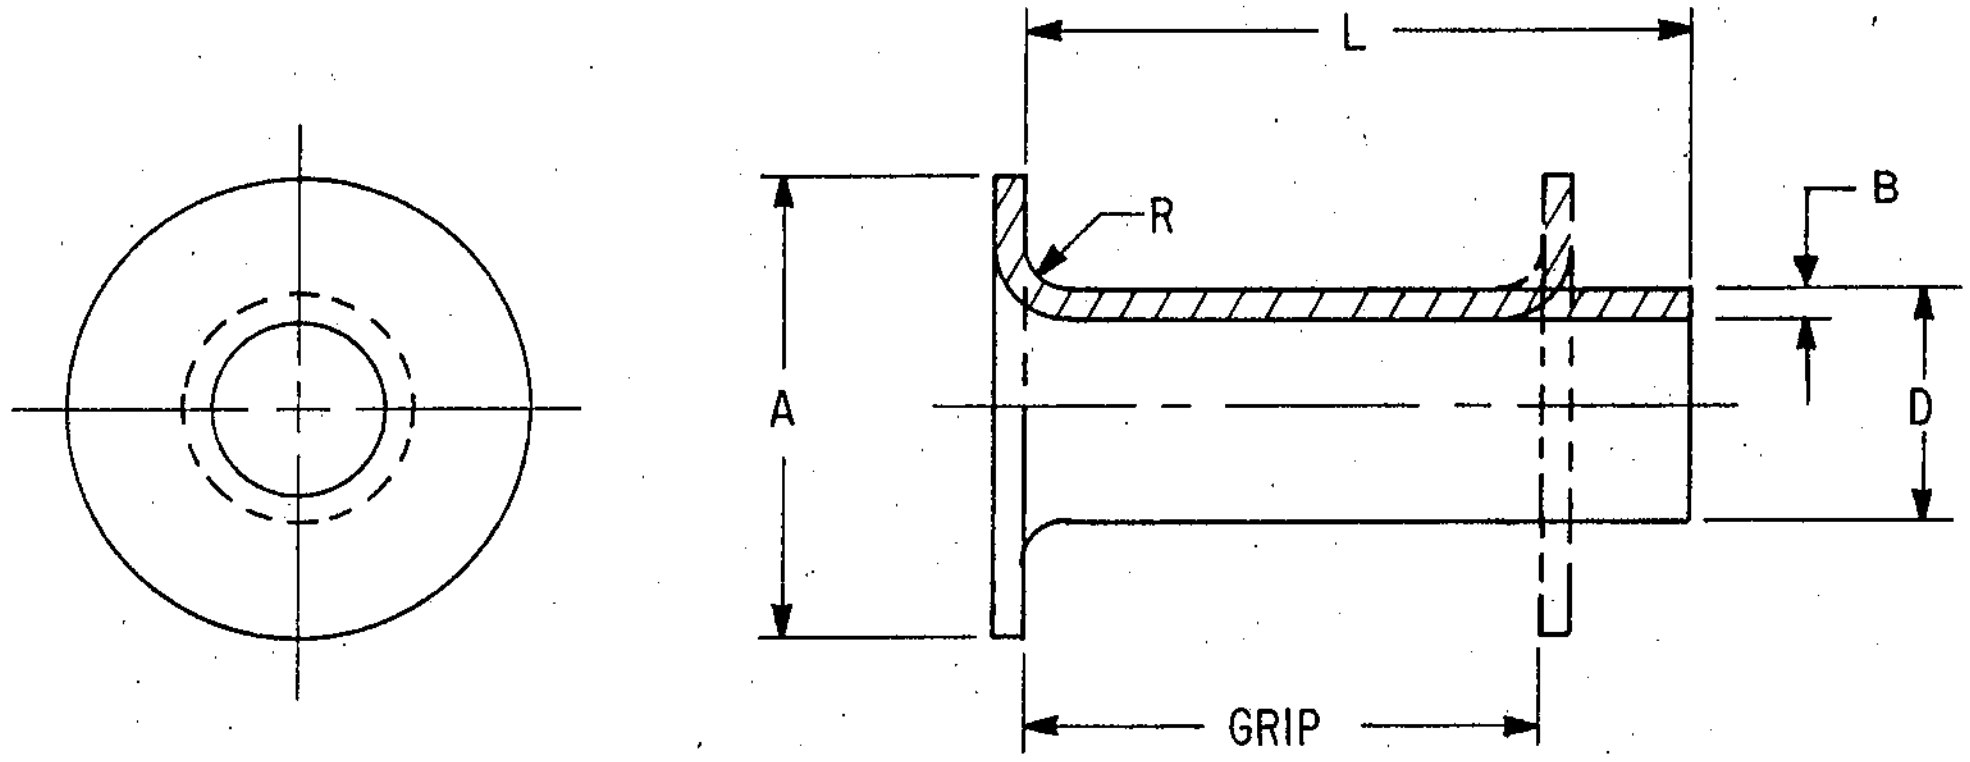

FLAT TYPE HEAD

METRIC

APPROVED 21 AUG 81 REVISED

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A. AR Other Cust 99	TITLE RIVET, TUBULAR, ROUND AND FLAT TYPE HEAD, METRIC	**MILITARY STANDARD** DS 51403
PROCUREMENT SPECIFICATION FF-R-556	SUPERSEDES:	PAGE 1 OF 4

DD FORM 1 MAR 72 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5320-0386

User activities:
ARMY-AT, ME
NAVY-MC,

Review activities:
ARMY - GL, MI
NAVY - AS
DLA - IS
NSA - NS

FED. SUP CLASS
5320

TABLE I.

DASH NUMBER	NOMINAL DIAMETER	A	A TOLERANCE	B	D DIA	K 1/	K TOLERANCE	L	L TOLERANCE	R MAX 2/	GRIP MAX
012002	1.20	2.00	±0.15	0.22 0.18	1.18 1.12	0.25	±0.05	2.00	±0.10	0.20	1.00
012003								3.00	±0.10		2.00
012004								4.00	±0.15		3.00
012005								5.00	±0.15		4.00
012006								6.00	±0.15		5.00
012007								7.00	±0.18		6.00
012008								8.00	±0.18		7.00
012009								9.00	±0.18		8.00
012010								10.00	±0.18		9.00
016002	1.60	2.50	±0.15	0.28 0.23	1.58 1.52	0.35	±0.05	2.00	±0.10	0.20	0.90
016003								3.00	±0.10		1.90
016004								4.00	±0.15		2.90
016005								5.00	±0.15		3.90
016006								6.00	±0.15		4.90
016007								7.00	±0.18		5.90
016008								8.00	±0.18		6.90
016009								9.00	±0.18		7.90
016010								10.00	±0.18		8.90
020002	2.00	3.20	±0.20	0.33 0.27	1.98 1.92	0.40	±0.05	2.00	±0.10	0.20	0.70
020003								3.00	±0.10		1.70
020004								4.00	±0.15		2.70
020005								5.00	±0.15		3.70
020006								6.00	±0.15		4.70
020007								7.00	±0.18		5.70
020008								8.00	±0.18		6.70
020009								9.00	±0.18		7.70
020010								10.00	±0.18		8.70
025003	2.50	4.00	±0.20	0.39 0.32	2.48 2.42	0.50	±0.05	3.00	±0.10	0.25	1.30
025004								4.00	±0.15		2.30
025005								5.00	±0.15		3.30
025006								6.00	±0.15		4.30
025007								7.00	±0.18		5.30
025008								8.00	±0.18		6.30
025009								9.00	±0.18		7.30
025010								10.00	±0.18		8.30
025012								12.00	±0.20		10.30
025015								15.00	±0.20		13.30
025018								18.00	±0.20		16.30
025020								20.00	±0.23		18.30
030003	3.00	4.50	±0.20	0.44 0.36	2.98 2.92	0.55	±0.05	3.00	±0.10	0.30	1.00
030004								4.00	±0.15		2.00
030005								5.00	±0.15		3.00
030006								6.00	±0.15		4.00
030007								7.00	±0.18		5.00
030008								8.00	±0.18		6.00
030009								9.00	±0.18		7.00
030010								10.00	±0.18		8.00
030012								12.00	±0.20		10.00
030015								15.00	±0.20		13.00
030018								18.00	±0.20		16.00
030020								20.00	±0.23		18.00

APPROVED 21 AUG 81 REVISED

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A. AR
Other Cust 99

TITLE
RIVET, TUBULAR, ROUND AND FLAT TYPE HEAD, METRIC

MILITARY STANDARD
DS 51403

PROCUREMENT SPECIFICATION
FF-R-556

SUPERSEDES:

DD FORM 1 MAR 72 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5320-0386

User activities:
ARMY - AT, ME
NAVY - MC

Review activities:
ARMY - GL, MI
NAVY - AS
DLA - IS
NSA - NS

FED. SUP CLASS
5320

TABLE I. Continued.

DASH NO	NOM DIA	A	A TOL	B	D DIA	K 1/	K TOL	L	L TOL	R MAX 2/	GRIP MAX
040004	4.00	6.00	±0.25	0.55 0.45	3.970 3.895	0.70	±0.10	4.00	±0.15	0.40	1.80
040005								5.00	±0.15		2.80
040006								6.00	±0.15		3.80
040007								7.00	±0.18		4.80
040008								8.00	±0.18		5.80
040009								9.00	±0.18		6.80
040010								10.00	±0.18		8.80
040012								12.00	±0.20		9.80
040015								15.00	±0.20		12.80
040018								18.00	±0.20		15.80
040020								20.00	±0.23		17.80
040022								22.00	±0.23		19.80
040025								25.00	±0.23		22.80
050004	5.00	7.50	±0.25	0.66 0.54	4.970 4.895	0.80	±0.10	4.00	±0.15	0.50	1.30
050005								5.00	±0.15		2.30
050006								6.00	±0.15		3.30
050007								7.00	±0.18		4.30
050008								8.00	±0.18		5.30
050009								9.00	±0.18		6.30
050010								10.00	±0.18		7.30
050012								12.00	±0.20		9.30
050015								15.00	±0.20		12.30
050018								18.00	±0.20		15.30
050020								20.00	±0.23		17.30
050022								22.00	±0.23		19.30
050025								25.00	±0.23		22.30
060006	6.00	9.00	±0.25	0.77 0.63	5.970 5.895	1.00	±0.10	6.00	±0.15	0.60	3.00
060007								7.00	±0.18		4.00
060008								8.00	+0.18		5.00
060009								9.00	±0.18		6.00
060010								10.00	±0.18		7.00
060012								12.00	±0.20		9.00
060015								15.00	±0.20		12.00
060018								18.00	±0.20		15.00
060020								20.00	±0.23		17.00
060022								22.00	±0.23		19.00
060025								25.00	+0.23		22.00
060028								28.00	+0.23		25.00
060030								30.00	±0.23		27.00

APPROVED 21 AUG 81 REVISED

This military standard is approved for use by all Departments and Agencies of the Department of Defense.
Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P. A. AR Other Cust. 99	International interest	TITLE RIVET, TUBULAR, ROUND AND FLAT TYPE HEAD, METRIC	MILITARY STANDARD DS 51403
PROCUREMENT SPECIFICATION FF-R-556	SUPERSEDES:		PAGE 3 OF 4

FED. SUP CLASS
5320

TABLE I. Continued.

DASH NO	NOM DIA	A	A TOLERANCE	B	D DIA	K 1/	K TOLERANCE	L	L TOLERANCE	R MAX 2/	GRIP MAX
080007	8.00	12.00	±0.30	0.94 0.77	7.96 7.87	1.30	±0.10	7.00	±0.18	0.80	3.40
080008								8.00	±0.18		4.40
080009								9.00	±0.18		5.40
080010								10.00	±0.18		6.40
080012								12.00	±0.20		8.40
080015								15.00	±0.20		11.40
080018								18.00	±0.20		14.40
080020								20.00	±0.23		16.40
080022								22.00	±0.23		18.40
080025								25.00	±0.23		21.40
080028								28.00	±0.23		24.40
080030								30.00	±0.23		26.40
080032								32.00	±0.25		28.40
080035								35.00	±0.25		31.40
100008	10.00	15.00	±0.30	1.10 0.90	9.96 9.87	1.60	±0.10	8.00	±0.18	1.00	4.30
100009								9.00	±0.18		5.30
100010								10.00	±0.18		6.30
100012								12.00	±0.20		8.30
100015								15.00	±0.20		11.30
100018								18.00	±0.20		14.30
100020								20.00	±0.23		16.30
100022								22.00	±0.23		18.30
100025								25.00	±0.23		21.30
100028								28.00	±0.23		24.30
100030								30.00	±0.23		26.30
100032								32.00	±0.25		28.30
100035								35.00	±0.25		31.30
100038								38.00	±0.25		34.30
100040								40.00	±0.25		36.30

1/ FOR ROUND TYPE HEAD ONLY.

2/ FOR FLAT TYPE HEAD ONLY.

REQUIREMENTS:

1. MATERIAL. BRASS, PER QQ-B-613, 260 ANNEALED.
2. FINISH. CADMIUM PLATE PER QQ-P-416, CLASS 2, 7.6 µm MINIMUM THICKNESS, TYPE II. (CODE - "D")
   PLATING, TIN-LEAD, ELECTRODEPOSITED PER MIL-P-81728. (CODE - "T")
   ELECTRODEPOSITED TIN-LEAD 7.6 µm MINIMUM THICKNESS TO MEET SOLDERABILITY REQUIREMENTS OF MIL-STD-202, METHOD 208. MINIMUM THICKNESS DOES NOT APPLY AFTER FUSING (IF PERFORMED) BUT COATING MUST SHOW COMPLETE COVERAGE.
   NO SUPPLEMENTARY FINISH (NO CODE).
3. RIVET HEADS. FLAT TYPE - "F", ROUND TYPE - "R".
4. PART NUMBER. THE BASIC PART NUMBER IS FOLLOWED BY A LETTER INDICATING HEAD TYPE AND A NUMBER CONSISTING OF SIX DIGITS.
   THE FIRST THREE DIGITS INDICATE THE RIVET SHANK DIAMETER IN TENTHS OF MILLIMETERS.
   THE SECOND THREE DIGITS DESIGNATE THE RIVET LENGTH IN MILLIMETERS.
   THE LETTER AFTER THE SIX DIGIT NUMBER IS THE FINISH CODE LETTER.

EXAMPLE: DS51403R012005D

FINISH CADMIUM PLATE
LENGTH 5mm LONG
SHANK DIAMETER 1.2mm
HEAD CODE ROUND TYPE
BASIC PART NUMBER

NOTES:

1. DIMENSIONS. IN MILLIMETERS (mm). DIMENSIONING AND TOLERANCE PER ANSI Y14.5 - 1973.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS, OR REQUEST FOR PROPOSAL, EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.
3. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

User activities:
ARMY - AT, ME
NAVY - MC

Review activities:
ARMY - GL, MI
NAVY - AS
DLA - IS
NSA - NS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

APPROVED 21 AUG 81 REVISED

P. A. AR **Other Cust.** 99	International interest	**TITLE** RIVET, TUBULAR, ROUND AND FLAT TYPE HEAD, METRIC	**MILITARY STANDARD** DS 51403
PROCUREMENT SPECIFICATION FF-R-556		**SUPERSEDES:**	**PAGE** 4 **OF** 4