INCH-POUND

MS16626C
14 March 2012
SUPERSEDING
MS16626B
26 January 1990

DETAIL SPECIFICATION SHEET

RING, RETAINING, EXTERNAL, INVERTED
(TAPERED SECTION TYPE)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and procurement specification MIL-R-21248.

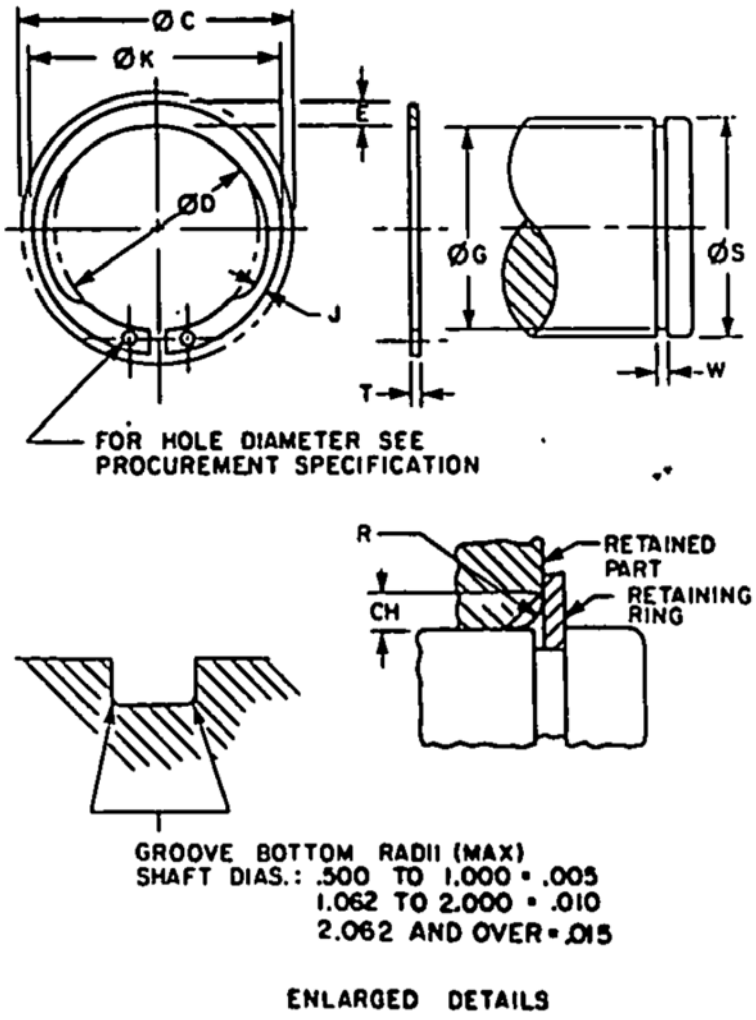


FIGURE 1. RING, RETAINING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:59Z
Check the source to verify that this is the current version before use.

TABLE I DIMENSIONS.

ØS SHAFT (REF)		ØD FREE		E LARGE SECTION HEIGHT		J SMALL SECTION HEIGHT		T 1/ THICKNESS		ØG RECOMMENDED GROOVE (REF)		W WIDTH		ØK 3/	ØC 4/	R 5/ OF RETAINED PART (REF)	CH 5/
INCH	MM	BASIC	TOL.	BASIC	TOL.	BASIC	TOL.	BASIC	TOL.	BASIC	TOL.	BASIC	TOL.	MIN.		MAX.	MAX.
.500	12.7	.461		.080		.041		.035		.460	±.002	.040		.640	.670	.051	.032
.562	14.3	.521		.088	±.004	.043	±.004	.035		.530	.004	.040		.715	.750	.057	.036
.594	15.1	.550		.092		.046		.035		.559	FIM 2/	.040		.750	.790	.059	.037
.625	15.9	.579		.096		.048		.035		.588		.040		.790	.830	.062	.039
.672	17.1	.621		.102		.051		.035		.631		.040		.850	.890	.063	.041
.688	17.5	.635		.104		.052		.042		.646		.047		.870	.910	.066	.042
.750	19.0	.693	+.005	.112		.056		.042		.704		.047	+.003	.945	.990	.071	.045
.781	19.8	.722	-.010	.116		.057		.042		.733		.047	-.000	.980	1.040	.073	.046
.812	20.6	.751		.120	±.005	.060	±.005	.042	±.002	.762	±.003	.047		1.020	1.080	.076	.048
.875	22.2	.810		.128		.064		.042		.821	.004 FIM 2/	.047		1.095	1.150	.080	.051
.938	23.8	.867		.136		.068		.042		.882		.047		1.170	1.230	.086	.054
.984	25.0	.923		.144		.072		.042		.926		.047		1.240	1.300	.091	.057
1.000	25.4	.923		.144		.072		.042		.940		.047		1.250	1.310	.091	.057
1.062	27.0	.982		.147		.073		.050		.998		.056		1.310	1.380	.092	.058
1.125	28.6	1.041		.150		.075		.050		1.059		.056		1.380	1.450	.093	.059
1.188	30.2	1.098		.153		.076		.050		1.118		.056		1.450	1.520	.094	.059
1.250	31.7	1.156		.157		.079		.050		1.176		.056	+.004	1.520	1.590	.096	.060
1.312	33.3	1.214	+.010	.161		.080		.050		1.232		.056	-.000	1.580	1.660	.097	.061
1.375	34.9	1.272	-.015	.165	±.006	.082	±.006	.050		1.291	±.004	.056		1.650	1.730	.098	.061
1.438	36.5	1.333		.169		.085		.050		1.350	.005	.056		1.715	1.800	.100	.063
1.500	38.1	1.387		.173		.086		.050		1.406	FIM 2/	.056		1.775	1.870	.100	.063

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:59Z
Check the source to verify that this is the current version before use.

TABLE I. DIMENSIONS - Continued

ØS SHAFT (REF)		ØD FREE		E LARGE SECTION HEIGHT		J SMALL SECTION HEIGHT		T 1/ THICKNESS		ØG RECOMMENDED GROOVE (REF)		W WIDTH RECOMMENDED GROOVE (REF)		ØK 3/	ØC 4/	R 5/ OF RETAINED PART (REF)	CH 5/ OF RETAINED PART (REF)
INCH	MM	BASIC	TOL.	BASIC	TOL.	BASIC	TOL.	BASIC	TOL.	BASIC	TOL.	BASIC	TOL.	MIN.		MAX.	MAX.
1.562	39.7	1.446		.178	±.006	.089	±.006	.062		1.468		.068		1.850	1.950	.104	.066
1.750	44.4	1.637	+.013	.196		.098		.062		1.650		.068		2.070	2.180	.116	.073
1.772	45.0	1.637	-.020	.196		.098		.062		1.669		.068	+.004	2.090	2.200	.116	.073
1.812	46.0	1.675		.199		.100		.062		1.708	±.005 .005	.068	-.000	2.130	2.240	.117	.074
1.969	50.0	1.819		.212		.106		.062		1.857	FIM 2/	.068		2.310	2.430	.124	.078
2.000	50.8	1.850		.216		.108		.062		1.886		.068		2.350	2.470	.127	.080
2.125	54.0	1.993		.229		.117		.078		2.003		.086		2.490	2.620	.133	.084
2.156	54.8	1.993	+.015	.229		.117		.078	±.003	2.032		.086		2.520	2.630	.133	.084
2.500	63.5	2.313	-.025	.259	±.007	.130	±.007	.078		2.360		.086		2.910	3.050	.151	.095
2.875	73.0	2.659		.290		.145		.093		2.721	±.006	.103	+.005	3.330	3.490	.170	.107
3.156	80.1	2.920	+.020	.316		.159		.093		2.986	.006	.103	-.000	3.650	3.820	.185	.116
3.500	88.8	3.237	-.030	.345	±.008	.173	±.008	.109		3.316	FIM 2/	.120		4.030	4.220	.202	.127
3.938	100.0	3.642		.368		.183		.109		3.734		.120		4.500	4.710	.212	.133

1/ T - THICKNESS "T" APPLIES TO UNPLATED RINGS. FOR CORROSION RESISTANT STEEL AND PLATED RINGS, +.002 SHOULD BE ADDED TO THE MAXIMUM TOLERANCE, i.e. ±.002 SHOULD BE +.004/-.002.

2/ FIM - (FULL INDICATOR MOVEMENT) IS THE MAXIMUM ALLOWABLE DEVIATION OF CONCENTRICITY BETWEEN THE GROOVE AND THE SHAFT.

3/ K - MAXIMUM DIAMETER WHEN THE RING IS PROPERLY SEATED IN THE GROOVE. (DESIGN REFERENCE DIMENSION).

4/ C - ACTUAL CLEARANCE DIAMETER WHEN THE RING IS SPRUNG OVER THE SHAFT, PRIOR TO INSTALLATION INTO THE GROOVE. (DESIGN REFERENCE DIMENSION).

5/ R AND CH - RADII OR CHAMFERS ALLOWABLE ON PARTS TO BE RETAINED BY THE RINGS. THRUST LOADS OF RINGS, RETAINING PARTS WITH CORNER RADII OR CHAMFERS ARE TABULATED ON PAGE 7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:59Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. CLASSIFICATION: RETAINING RINGS FURNISHED UNDER THIS STANDARD SHALL BE TYPE 1, CLASS 4 OF THE PROCUREMENT SPECIFICATION.

2. MATERIAL:

   a. CARBON SPRING STEEL,GRADE 1060 THRU 1095 (UNS G10600 THRU G10950) IN ACCORDANCE WITH ASTM A568/A568M OR ASTM A684/A684M.
   b. CORROSION RESISTANT STEEL IN ACCORDANCE WITH AMS 5520 (UNS S15700).
   c. BERYLLIUM COPPER, ALLOY NUMBER 170 (UNS C17000) OR ALLOY NUMBER 172 (UNS C17200) IN ACCORDANCE WITH ASTM B194.

3. HARDNESS:

TABLE II. HARDNESS.

ØSHAFT (REF)	CARBON STEEL	CORROSION RESISTANT STEEL	BERYLLIUM COPPER
.500 TO .672	50-55 HRC	63-69.5 HR30N	56.5-62 HR30N
.688 TO .812	48-53 HRC	63-69.5 HR30N	56.5-62 HR30N
.875 TO 1.500	48-53 HRC	44-51 HRC	37-43 HRC
1.562 TO 3.437	46-51 HRC	44-51 HRC	37-43 HRC
3.500 AND OVER	44-49 HRC	44-51 HRC	37-43 HRC

4. PROTECTIVE FINISH OR TREATMENT:

   a. CARBON STEEL – SHALL BE AS SPECIFIED (SEE TABLE III OR IV):

      1. CADMIUM PLATE IN ACCORDANCE WITH SAE AMS-QQ-P-416, TYPE II, CLASS 3 OR ASTM B696, TYPE II, CLASS 5.

      2. ZINC COAT IN ACCORDANCE WITH ASTM B633, TYPE II, CLASS Fe/Zn 5 OR ASTM B695, TYPE II, CLASS 5.

      3. PHOSPHATE COAT IN ACCORDANCE WITH MIL-DTL-16232, TYPE Z, CLASS 2.

   b. CORROSION RESISTANT STEEL – SHALL BE CLEANED, DESCALED AND PASSIVATED IN ACCORDANCE WITH SAE AMS2700.

5. PART NUMBER: THE BASIC MS PART NUMBER IS FOLLOWED BY A DASH NUMBER TAKEN FROM TABLE III AND IV.

   EXAMPLE: MS16626-1100 IS THE PART NUMBER FOR A CARBON STEEL, CADMIUM PLATED, INTERNAL, INVERTED RETAINING RING FOR USE IN A 1.000 SHAFT DIAMETER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:59Z
Check the source to verify that this is the current version before use.

TABLE III. DASH NUMBERS FOR MS16626.

ØS SHAFT (REF)	1/ CARBON STEEL CADMIUM PLATE	1/ CARBON STEEL ZINC COAT	1/ CARBON STEEL PHOSPHATE COAT	STEEL CORROSION RESISTANT	1/ BERYLLIUM COPPER
	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.
.500	-1050	-2050	-3050	-4050	-5050
.562	-1056	-2056	-3056	-4056	-5056
.594	-1059	-2059	-3059	-4059	-5059
.625	-1062	-2062	-3062	-4062	-5062
.672	-1067	-2067	-3067	-4067	-5067
.688	-1068	-2068	-3068	-4068	-5068
.750	-1075	-2075	-3075	-4075	-5075
.781	-1078	-2078	-3078	-4078	-5078
.812	-1081	-2081	-3081	-4081	-5081
.875	-1087	-2087	-3087	-4087	-5087
.935	-1093	-2093	-3093	-4093	-5093
.984	-1098	-2098	-3098	-4098	-5098
1.000	-1100	-2100	-3100	-4100	-5100
1.062	-1106	-2106	-3106	-4106	-5106
1.125	-1112	-2112	-3112	-4112	-5112
1.188	-1118	-2118	-3118	-4118	-5118
1.250	-1125	-2125	-3125	-4125	-5125
1.312	-1131	-2131	-3131	-4131	-5131
1.375	-1137	-2137	-3137	-4137	-5137
1.438	-1143	-2143	-3143	-4143	-5143
1.500	-1150	-2150	-3150	-4150	-5150
1.562	-1156	-2156	-3156	-4156	-5156
1.750	-1175	-2175	-3175	-4175	-5175
1.772	-1177	-2177	-3177	-4177	-5177
1.812	-1181	-2181	-3181	-4181	-5181
1.969	-1196	-2196	-3196	-4196	-5196
2.000	-1200	-2200	-3200	-4200	-5200
2.125	-1212	-2212	-3212	-4212	
2.156	-1215	-2215	-3215	-4215	
2.500	-1250	-2250	-3250	-4250	
2.875	-1287	-2287	-3287	-4287	
3.156	-1315	-2315	-3315	-4315	
3.500	-1350	-2350	-3350	-4350	
3.938	-1393	-2393	-3393	-4393	

1/ SUBSTITUTE CORROSION RESISTANT STEEL WHEN USED IN FOOD PROCESSING MACHINERY, OR IN FUEL OR LUBRICATION SYSTEMS, OR WHEN USED AT TEMPERATURES OVER 450°F (233°C).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:59Z
Check the source to verify that this is the current version before use.

TABLE IV. SUBSTITUTION TABLE (CROSS REFERENCE OF PART NUMBERS).

	INACTIVE	SUBSTITUTE	SUBSTITUTE	SUBSTITUTE
ØS SHAFT (REF)	CARBON STEEL	1/ CARBON STEEL CADMIUM PLATE	1/ CARBON STEEL ZINC COAT	1/ CARBON STEEL PHOSPHATE COAT
	MS16626	MS16626	MS16626	MS16626
.500	-50	-1050	-2050	-3050
.562	-56	-1056	-2056	-3056
.594	-59	-1059	-2059	-3059
.625	-62	-1062	-2062	-3062
.672	-67	-1067	-2067	-3067
.688	-68	-1068	-2068	-3068
.750	-75	-1075	-2075	-3075
.781	-78	-1078	-2078	-3078
.812	-81	-1081	-2081	-3081
.875	-87	-1087	-2087	-3087
.935	-93	-1093	-2093	-3093
.984	-98	-1098	-2098	-3098
1.000	-100	-1100	-2100	-3100
1.062	-106	-1106	-2106	-3106
1.125	-112	-1112	-2112	-3112
1.188	-118	-1118	-2118	-3118
1.250	-125	-1125	-2125	-3125
1.312	-131	-1131	-2131	-3131
1.375	-137	-1137	-2137	-3137
1.438	-143	-1143	-2143	-3143
1.500	-150	-1150	-2150	-3150
1.562	-156	-1156	-2156	-3156
1.750	-175	-1175	-2175	-3175
1.772	-177	-1177	-2177	-3177
1.812	-181	-1181	-2181	-3181
1.969	-196	-1196	-2196	-3196
2.000	-200	-1200	-2200	-3200
2.125	-212	-1212	-2212	-3212
2.156	-215	-1215	-2215	-3215
2.500	-250	-1250	-2250	-3250
2.875	-287	-1287	-2287	-3287
3.156	-315	-1315	-2315	-3315
3.500	-350	-1350	-2350	-3350
3.938	-393	-1393	-2393	-3393

1/ SUBSTITUTE CORROSION RESISTANT STEEL WHEN USED IN FOOD PROCESSING MACHINERY, OR IN FUEL OR LUBRICATION SYSTEMS, OR WHEN USED AT TEMPERATURES OVER 450°F (233°C).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:59Z
Check the source to verify that this is the current version before use.

NOTES:

1. DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED.

2. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.

3. RECOMMENDED DESIGN LIMITATIONS AND USAGE:

(a) INTENDED USE- TO PROVIDE UNIFORM PROTRUDING SHOULDERS FOR POSITIONING AND RETAINING MACHINE COMPONENTS IN HOUSINGS (BORES). TAPERED DESIGN PRINCIPLE PERMITS RINGS TO MAINTAIN PRACTICTICALLY CONSTANT CIRCULARITY, AND FIT SECURELY AGAINST BOTTOM OF GROOVE, COUNTERACTING CONSIDERABLE CENTRIFUGAL FORCE (SEE CHART BELOW). ESPECIALLY SUITED FOR LOCATING AND RETAINING MACHINE PARTS HAVING CURVED ABUTTING SURFACES. THE USE OF THE FOLLOWING FORMULAS ARE BASED ON THE FACT THAT THE RING MATERIAL WILL NOT FAIL IN COMPRESSION.

LIMITATION ON USE – THE FOLLOWING FORMULAS ARE NOT TO BE USED FOR BRITTLE MATERIALS SUCH AS CAST IRON, ETC.

WARNING: RINGS SHOULD NOT BE OVER EXPANDED DURING INSTALLATION SINCE THIS WILL LEAD TO RING FAILURE. IF RING HAS PLAY BETWEEN THE GROOVE DIAMETER AND THE INSIDE RING DIAMETER THIS INDICATES THAT THE RING HAS BEEN OVER EXPANDED, (PROVIDING THE GROOVE DIAMETER HAS BEEN MACHINED TO RECOMMENDED DIMENSIONS).

FOR APPROXIMATE SAFETY RPM LIMITS SEE TABLE V.

TABLE V. APPROXIMATE SAFETY RPM LIMITS.

Ø SHAFT (INCHES)		.500	1	2	3	4
CARBON STEEL AND CORROSION RESISTANT STEEL	RPM LIMIT	40,000	20,000	10,000	6,700	5,000
BERYLLIUM COPPER	RPM LIMIT	25,000	13,000	6,400		

(b) ALLOWABLE THRUST LOAD CAPACITY OF THE RINGS, ABUTTING COMPONENTS TO HAVE SHARP CORNERS =

$$P = \frac{2}{3}\frac{\pi STX}{F}$$

WHERE:

P = ALLOWABLE THRUST LOAD (POUNDS)
S = SHAFT DIAMETER (INCHES)
T = RING THICKNESS (INCHES)
X = ULTIMATE SHEAR STRENGTH OF THE RING MATERIAL (PSI) 1/
F = FACTOR OF SAFETY

A FACTOR OF SAFETY, F=4, IS RECOMMENDED, SINCE THE RING UNDER LOAD IS SUBJECTED NOT ONLY TO PURE SHEAR STRESSES, BUT ALSO TO BENDING STRESSES.

(c) ALLOWABLE LOAD CAPACITY OF GROOVE WALL =

$$P = \frac{1}{2}\frac{\pi SdY}{F}.$$

WHERE:

P = ALLOWABLE COMPRESSION LOAD (POUNDS)
S = SHAFT DIAMETER (INCHES)
d = GROOVE DEPTH (INCHES)
Y = YIELD STRENGTH IN COMPRESSION OF THE GROOVE MATERIAL (PSI)
F = FACTOR OF SAFETY

TO INSURE A SAFE WORKING LOAD, A SAFETY FACTOR, F = 2, IS RECOMMENDED.

(d) MINIMUM DISTANCE BETWEEN OUTER GROOVE WALL AND END OF SHAFT =

$$Z = 3d$$

WHERE:

Z = MINIMUM DISTANCE BEWTWEEN OUTER GROOVE WALL AND END OF SHAFT (INCHES)
d = GROOVE DEPTH (INCHES)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:59Z
Check the source to verify that this is the current version before use.

(e) DIFFERENTIAL ROTATION =

THE CONDITIONS UNDER WHICH A RETAINING RING MAY BE USED WHEN ADJACENT PARTS ROTATE RELATIVE TO IT, FALL INTO TWO CATEGORIES:

(1) WHERE NO THRUST IS EXERTED BY ADJACENT PART: IN THIS CASE, DIFFERENTIAL ROTATION OF RING AND ADJACENT PART CREATES NO ELEMENT OF RISK IN THE APPLICATION OF THE RINGS BECAUSE NO FRICTIONAL TORQUE IS EXERTED BY THE MACHINE PART ON THE RING.

(2) CONSIDERATION MUST BE GIVEN TO THE MAGNITUDE OF THE THRUST INVOLVED. THE FRICTION MOMENT MAY NOT EXCEED THE BENDING MOMENT, WHICH THE RING CAN TOLERATE WITHOUT RELEASING ITS PRESSURE AGAINST THE BOTTOM OF THE GROOVE, FORMULATED AS FOLLOWS:

$$fPN \leq \frac{sTE^2}{18}$$ OR $$P \leq \frac{sTE^2}{f18N}$$

WHERE:

P = ALLOWABLE THRUST LOAD EXERTED BY ADJACENT PART (POUNDS)
f = COEFFICIENT OF FRICTION
s = WORKING STRESS OF RING UNDER MAXIMUM EXPANSION (PSI)2/
T = RING THICKNESS (INCHES)
E = GREATEST WIDTH SECTION OF RING (INCHES)
N = NEUTRAL RING DIAMETER (INCHES) = FREE DIAMETER MINUS 3/4 E DIMENSION

IN SUCH CASES WHERE DIFFERENTIAL ROTATION OCCURS, THE CALCULATION SHOULD BE BASED ON THE MAXIMUM POSSIBLE VALUE OF THE COEFFICIENT OF FRICTION.

1/ X = 150,000 PSI ULTIMATE SHEAR STRENGTH FOR RINGS OF CARBON STEEL OR CORROSION RESISTANT STEEL.
X = 110,000 PSI ULTIMATE SHEAR STRENGTH FOR RINGS OF BERYLLIUM COPPER.
2/ S = 250,000 PSI WORKING STRESS FOR RINGS OF CARBON STEEL OR CORROSION RESISTANT STEEL.
S = 180,000 PSI WORKING STRESS FOR RINGS OF BERYLLIUM COPPER

(f) IMPACT CAPACITY OF RING OR GROOVE WALL =

$$I_R = \frac{PT}{2}$$ FOR THE RING (INCH POUNDS) ABUTTING COMPONENTS TO HAVE SHARP CORNERS

$$I_G = \frac{Pd}{2}$$ FOR THE GROOVE (INCH POUNDS).

WHERE:

P = ALLOWABLE THRUST LOAD OF RING OR GROOVE (POUNDS)
T = RING THICKNESS (INCHES)
I_G = IMPACT CAPACITY OF GROOVE WALL (INCH POUNDS)
d = GROOVE DEPTH (INCHES)
I_R = IMPACT CAPACITY OF RING (INCH POUNDS)

(g) LOAD CAPACITY, WITH THE RETAINED PART RADIUSED OR CHAMFERED =

WHEN THE RADIUS OR CHAMFER OF THE RETAINED PART DOES NOT EXCEED THE MAXIMUM RADIUS ALLOWED FOR THE BOTTOM OF THE RING GROOVE, THE LESSER LOAD CAPACITY COMPUTED FROM THE FORMULAS ON PAGE 7 WILL APPLY. THE CORNER RADII AND CHAMFERS LISTED ON TABLE 1 WERE CHOSEN AS LARGE AS POSSIBLE FOR THE RING SIZES INVOLVED AND ARE RELATED TO THE MAXIMUM THRUST LOADS LISTED IN TABLE VI.

IF THE CORNER RADII OR CHAMFERS ARE SMALLER THAN THOSE LISTED, THEN THE THRUST LOADS INCREASE PROPORTIONALLY, IN ACCORDANCE WITH THE FOLLOWING FORMULAS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:59Z
Check the source to verify that this is the current version before use.

$P^1 = \frac{P\ CH}{CH^1}$ OR $P^1 = \frac{PR}{R^1}$

WHERE:

P^1 = NEW ALLOWABLE THRUST LOAD
P = LISTED ALLOWABLE THRUST LOAD
CH^1 = NEW (SMALLER) CHAMFER
CH = LISTED CHAMFER
R^1 = NEW (SMALLER) CORNER RADIUS
R = LISTED CORNER RADIUS

LIMIT LOADS LISTED IN TABLE VI ARE BASED ON RINGS OF STEEL (WORKING STRESS = 250,000 PSI) AND OF BERYLLIUM COPPER (WORKING STRESS = 180,000 PSI). IF THE ALLOWABLE GROOVE CAPACITY LOADS, AS CALCULATED BY USING THE FORMULA ON PAGE 7 ARE LESS THEN THEY SHOULD BE USED.

TABLE VI. LIMIT LOADS.

NOMINAL RING SIZE		ALLOWABLE THRUST LOAD FOR RING ASSEMBLIES WITH PARTS HAVING MAXIMUM CORNER RADII OR CHAMFERS.	
FROM	TO	CARBON STEEL OR CORROSION RESISTANT STEEL	BERYLLIUM COPPER
.500	.672	680 LB	500 LB
.688	1.000	1000 LB	700 LB
1.062	1.500	1460 LB	1050 LB
1.563	2.000	2250 LB	1600 LB
2.125	2.500	3750 LB	
2.875	3.156	5550 LB	
3.500	3.938	7850 LB	

4. CHANGES FROM PREVIOUS ISSUE. MARGINAL NOTATIONS ARE NOT USED IN THIS REVISION TO IDENTIFY CHANGES WITH RESPECT TO THE PREVIOUS ISSUE DUE TO THE EXTENT OF THE CHANGES.

MILITARY INTEREST

Custodians:
Army - AR
Navy - OS
Air Force - 99

Preparing activity:
DLA - IS

(Project 5325-2011-007)

Review activities:
Army – AT, AV, CR4, GL, MI
Navy – MC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:59Z
Check the source to verify that this is the current version before use.