INCH-POUND
MS17348H
w/AMENDMENT 1
24 February 2017
SUPERSEDING
MS17348H
16 January 2013

DETAIL SPECIFICATION SHEET

CONNECTOR, RECEPTACLE, ELECTRICAL, JAM NUT (BOX)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-22992.

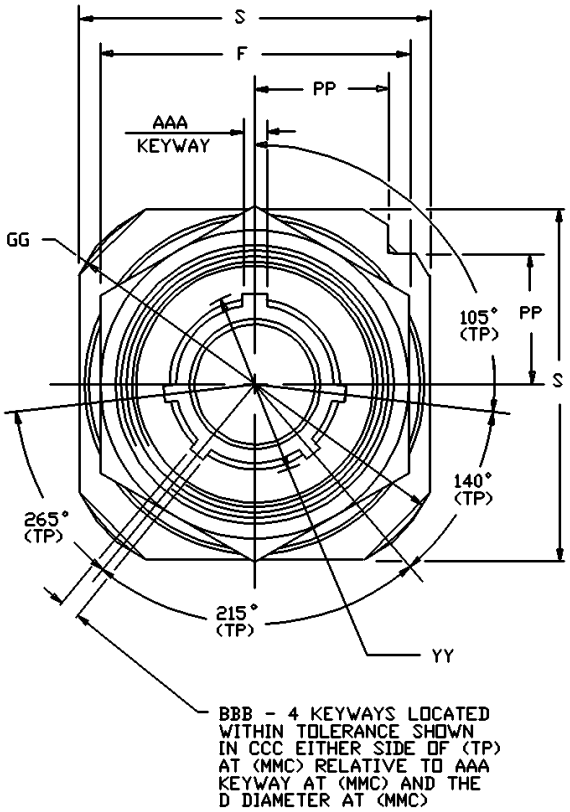


FIGURE 1. Configuration and dimensions.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

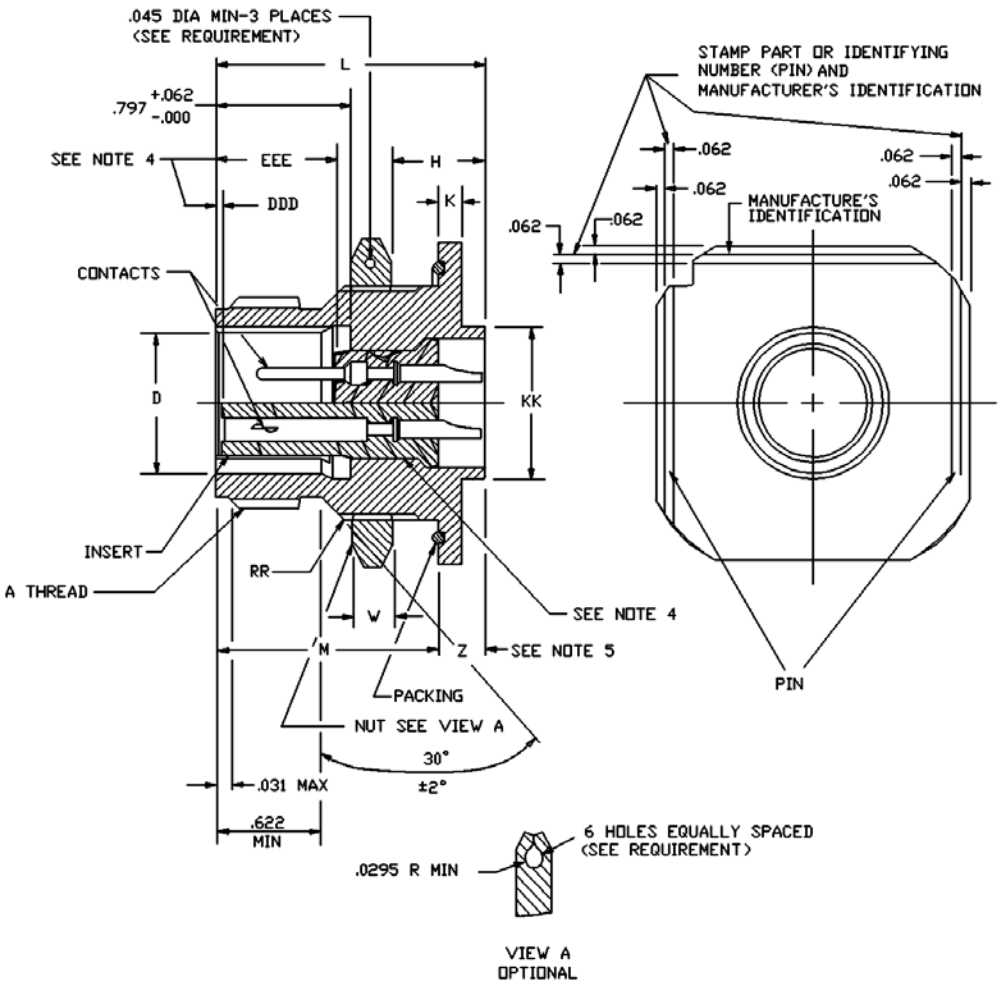


FIGURE 1. Configuration and dimensions – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

Shell size	A Thread (plated) class 2A	D dia + .005 - .010	F hex + .017 - .016	H Panel thickness		K + .006 - .005	L + .011 - .010
				min	max		
12	0.8750-0.1P-0.2L-DS	.567	1.250	.094	.297	.125	1.578
14	1.0000-0.1P-0.2L-DS	.692	1.312	.094	.297	.125	1.578
16	1.1250-0.1P-0.2L-DS	.817	1.500	.094	.297	.188	1.578
18	1.2500-0.1P-0.2L-DS	.942	1.562	.094	.266	.188	1.578
20	1.3750-0.1P-0.2L-DS	1.068	1.750	.094	.266	.188	1.578
22	1.5000-0.1P-0.2L-DS	1.192	1.875	.094	.266	.188	1.578
24	1.7500-0.1P-0.2L-DS	1.317	2.125	.094	.328	.188	1.641
28	2.0000-0.1P-0.2L-DS	1.536	2.375	.094	.328	.219	1.641
32	2.2500-0.1P-0.2L-DS	1.786	2.625	.094	.328	.219	1.641
36	2.5000-0.1P-0.2L-DS	2.005	2.875	.094	.328	.219	1.641
40	2.7500-0.1P-0.2L-DS	2.255	3.125	.094	.328	.219	1.641
44	3.0000-0.1P-0.2L-DS	2.545	3.375	.094	.328	.219	1.641

Shell size	M	S	W + .017 - .000	Z max (see note 5)	Z min (contact size 0 only)	DDD Socket insert location ± .030	EEE Pin insert location ± .030
12	1.235	1.375	.188	.429	NA	.020	.729
14	1.235	1.500	.188	.429	NA	.020	.729
16	1.235	1.750	.188	.461	NA	.020	.729
18	1.203	1.875	.188	.461	NA	.020	.729
20	1.203	2.000	.188	.461	.535	.020	.729
22	1.203	2.125	.188	.461	.535	.020	.729
24	1.266	2.375	.188	.398	.472	.020	.729
28	1.329	2.625	.250	.335	.409	.020	.729
32	1.329	2.875	.250	.335	.409	.020	.729
36	1.329	3.125	.250	.335	.409	.020	.729
40	1.329	3.406	.250	.335	.409	.020	.729
44	1.329	3.656	.250	.562	.409	.039	.764

FIGURE 1. Configuration and dimensions – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

Shell size	GG dia	KK dia + .011 - .010	PP + .011 - .010	RR Thread (plated) class 2A
12	1.562	.640	.486	1.0000-20 UNEF
14	1.750	.765	.530	1.1250-18 UNEF
16	2.000	.890	.623	1.2500-18 UNEF
18	2.125	1.015	.663	1.3750-18 UNEF
20	2.250	1.171	.707	1.5000-18 UNEF
22	2.500	1.296	.751	1.6250-18 UNEF
24	2.750	1.421	.840	1.8750-16 UN
28	3.000	1.625	.928	2.1250-16 UN
32	3.250	1.891	1.017	2.3750-16 UN
36	3.500	2.078	1.104	2.6250-16 UN
40	3.750	2.312	1.213	2.8750-16 UN
44	4.000	2.562	1.299	3.1250-16 UN

Shell size	YY dia + .010 - .006	AAA	BBB	CCC	Packing preformed size (see note 6)
12	.647	.126 + .007 / - .001	.063 + .007 / - .001	.0035	SAE-AS29513-24
14	.772	.126 + .007 / - .001	.063 + .007 / - .001	.0035	SAE-AS29513-26
16	.897	.182 + .010 / - .001	.108 + .010 / - .001	.007	SAE-AS29513-127
18	1.022	.182 + .010 / - .001	.108 + .010 / - .001	.007	SAE-AS29513-129
20	1.148	.182 + .010 / - .001	.108 + .010 / - .001	.007	SAE-AS29513-131
22	1.272	.182 + .010 / - .001	.108 + .010 / - .001	.007	SAE-AS29513-133
24	1.473	.260 + .010 / - .001	.155 + .010 / - .001	.007	SAE-AS29513-137
28	1.692	.260 + .010 / - .001	.155 + .010 / - .001	.007	SAE-AS29513-141
32	1.942	.260 + .010 / - .001	.155 + .010 / - .001	.007	SAE-AS29513-145
36	2.161	.260 + .010 / - .001	.155 + .010 / - .001	.007	SAE-AS29513-149
40	2.411	.260 + .010 / - .001	.155 + .010 / - .001	.007	SAE-AS29513-234
44	2.692	.260 + .010 / - .001	.155 + .010 / - .001	.007	SAE-AS29513-236

FIGURE 1. Configuration and dimensions – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.001	0.03	.328	8.33	.897	22.78	1.536	39.01	2.875	73.03
.0035	0.089	.335	8.51	.928	23.57	1.562	39.67	3.000	76.20
.005	0.13	.398	10.11	.942	23.93	1.578	40.08	3.125	79.38
.006	0.15	.409	10.34	1.0000	25.400	1.625	41.28	3.258	82.75
.007	0.18	.429	10.89	1.015	25.78	1.641	41.68	3.375	85.73
.010	0.25	.461	11.71	1.017	25.83	1.692	42.98	3.406	86.51
.011	0.28	.472	11.99	1.022	25.96	1.750	44.45	3.500	88.90
.016	0.41	.486	12.34	1.068	27.13	1.786	45.36	3.656	92.86
.017	0.43	.530	13.46	1.104	28.04	1.875	47.63	3.750	95.25
.020	0.51	.535	13.59	1.1250	28.575	1.891	48.03	4.000	101.60
.030	0.76	.562	14.27	1.148	29.16	1.942	49.33		
.031	0.79	.567	14.40	1.171	29.74	2.000	50.80		
.039	0.99	.623	15.82	1.192	30.28	2.005	50.93		
.045	1.14	.640	16.26	1.203	30.56	2.078	52.78		
.062	1.57	.647	16.43	1.213	30.81	2.125	53.98		
.063	1.60	.663	16.84	1.235	31.37	2.161	54.89		
.094	2.39	.692	17.58	1.250	31.75	2.250	57.15		
.108	2.74	.707	17.96	1.266	32.16	2.255	57.28		
.125	3.18	.729	18.52	1.272	32.31	2.312	58.72		
.126	3.20	.751	19.08	1.296	32.92	2.317	58.85		
.155	3.94	.764	19.41	1.299	32.99	2.375	60.33		
.182	4.62	.765	19.43	1.312	33.32	2.411	60.24		
.188	4.78	.772	19.61	1.317	33.45	2.500	63.50		
.219	5.56	.797	20.24	1.329	33.75	2.562	65.07		
.250	6.35	.817	20.75	1.375	34.93	2.625	66.68		
.260	6.60	.840	21.34	1.473	37.42	2.692	68.38		
.266	6.76	.8750	22.225	1.5000	38.100	2.750	69.85		

NOTES:

1. All dimensions are in inches.
2. Unless otherwise specified, tolerances are ± .016 (0.41 mm).
3. Metric equivalents are given for information only.
4. Dimensions shall be maintained when inserts are pressed firmly against indicated shoulder.
5. For size 0 contacts only: Increase Z dimension by .312 (7.92 mm) for shell sizes 12 through 40, and increase Z dimension by .062 (1.57 mm) for shell size 44.
6. SAE-AS29513 dash numbers are for dimensions only. Packing material utilized for specified O-rings shall meet the performance requirements of MIL-DTL-22992.

FIGURE 1. Configuration and dimensions – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Mates with plugs specified on MS17344 and covers specified on MS17349.

Class shall be designated by the letter C (pressurized), J (pressurized with grommet) or R (environmental resisting).


For shell size, insert arrangement, alternate position, contact size, spacing and service rating, see MIL-STD-1651.

Shell finish: See MIL-DTL-22992.

Safety wire shall not pull out of safety wire holes when safety wire NI-CU alloy (monel ™) (UNS N04400) or NI-CR alloy (inconel ™) (UNS N06600), .020 inches **(**0.51 mm) diameter and in accordance with NASM20995, is threaded through a hole and a pull of 30 lbs (13.61kg) minimum is applied. Two pulls shall be made, one parallel with axis of nut and one perpendicular to axis of nut.

Class shall be designated by the letter C (pressurized), J (pressurized with grommet) or R (environmental resisting).

Part or Identifying Number (PIN) example.

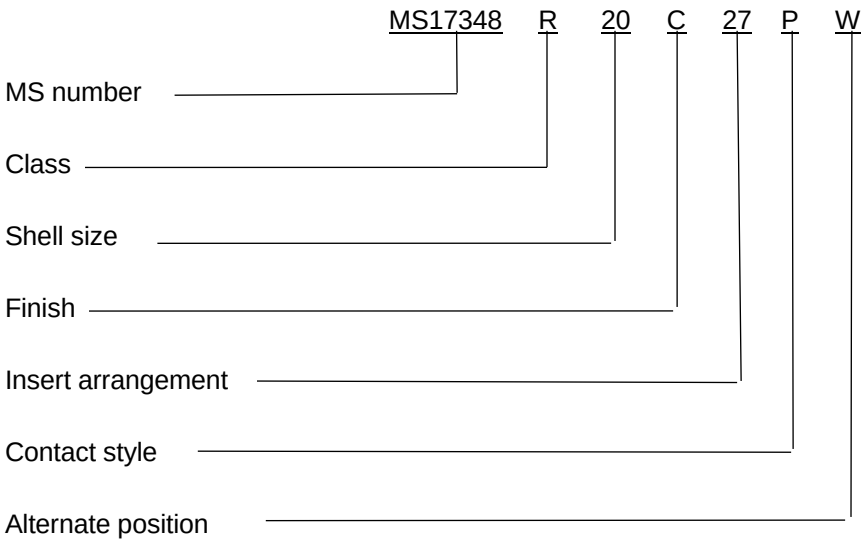

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-22992, this document references the following.

MS17344
MS17349
MIL-STD-1651
NASM20995
SAE-AS29513

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – EC
Air Force – 85
NASA – NA
DLA – CC

Preparing activity:
DLA – CC

Review activities:
Army – AR, MI
Navy – AS, CG, MC, OS, SH, YD
Air Force – 19, 99

(Project 5935–2017–041)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.