
FED SUP CLASS
5935

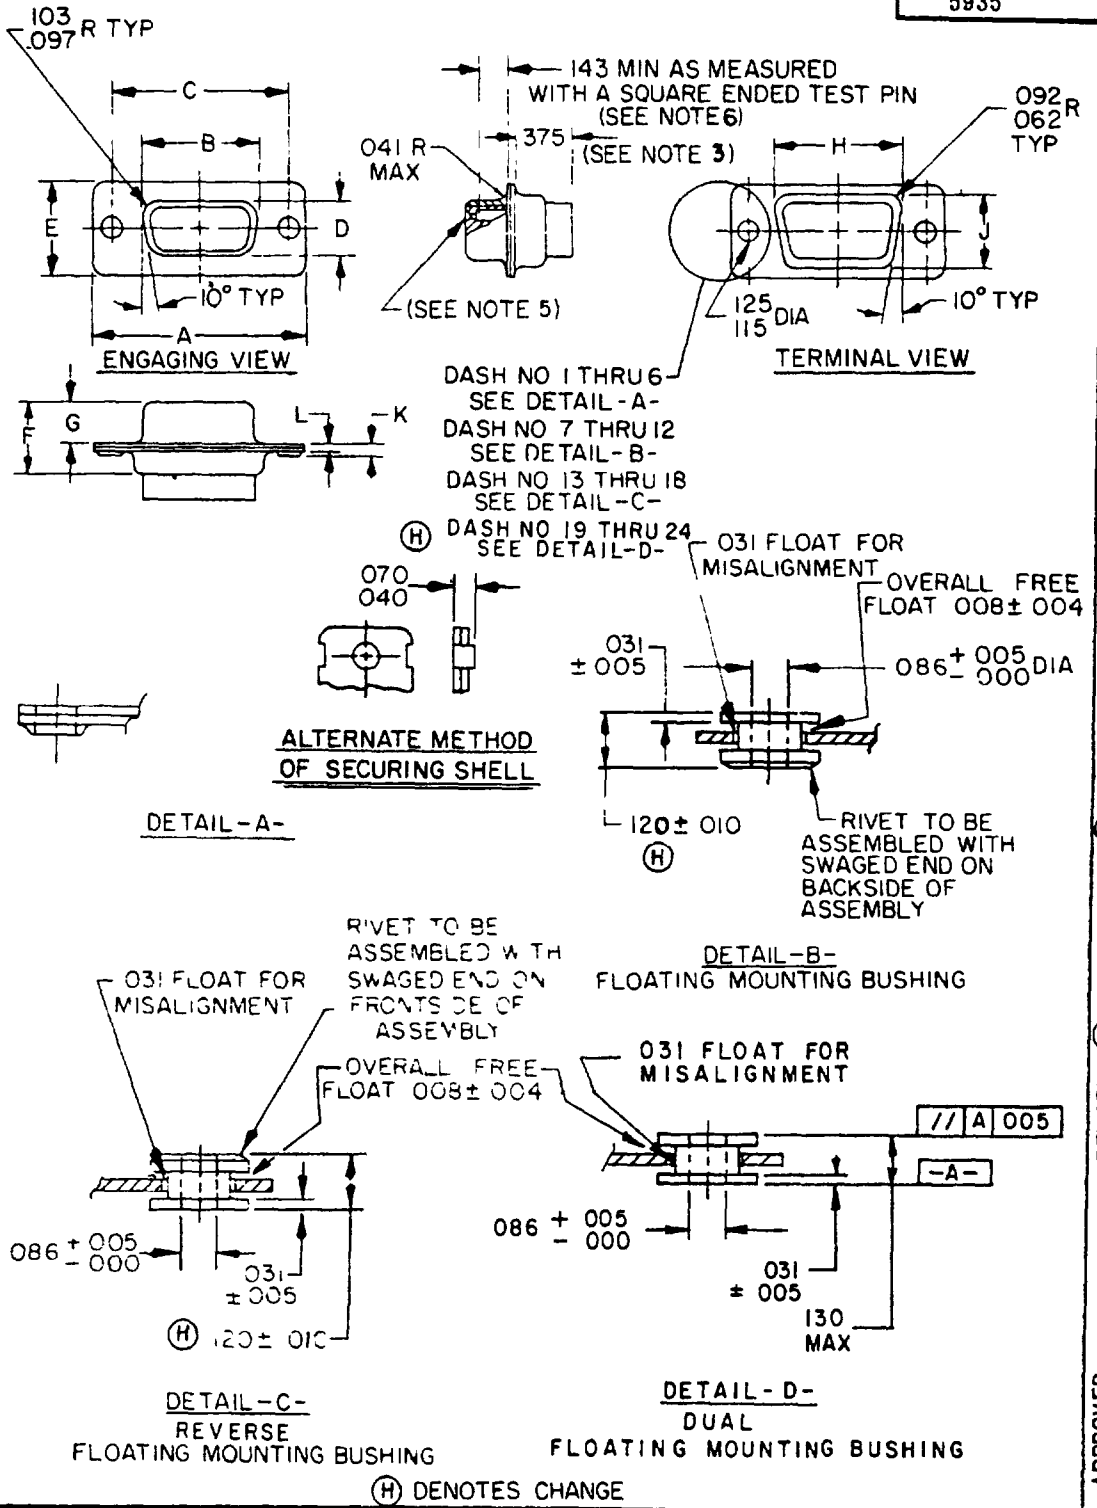

(H) DENOTES CHANGE

APPROVED 30 NOV 1967 REVISED (G) 7 DEC 1973 (H) 30 NOV 76

User activities: Army ME, Navy MC, CG, Air Force

Reviewer activities: Army MI, Navy AS, SH, Air Force 11, DSA-FC 99

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P A NAVY-EC Other Cust AF-85 ARMY-EL	International interest	TITLE CONNECTORS, ELECTRIC, RECTANGULAR, MINIATURE, POLARIZED SHELL, RACK AND PANEL, SHELL, RECEPTACLE SOCKET CONTACTS, CRIMP TYPE	MILITARY STANDARD MS18270
Procurement Specification MIL-C-24308		SUPERSEDES	PAGE 1 OF 3

DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5935-2011-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:18Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5935

MS number	Shell size	Dimensions										
		A	B	C	D	E	F	G	H	J	K	L
MS18270-1	1	1.228 (31.19) 1.198 (30.43)	648 (16.46) 638 (16.21)	,989 (25 12) .979 (24 87)	.316 (8.03) .306 (7 77)	.509 (12.93) 479 (12.17)	.439 (11.15) .419 (10.54)	248 (6.30) .238 (6 05)	769 (19 53) 749 (19 02)	432 (10 97) 412 (10 46)	.060 (1 52) .035 (89)	040 (1 02) 020 (51)
MS18270-2	2	1.556 (39.52) 1.526 (38.76)	.976 (24.79) .966 (24 79)	1 317 (33 45) 1.307 (33.20)	.316 (8.03) 306 (7.77)	509 (12.93) .479 (12 17)	.439 (11.15) .419 (10 64)	.248 (6.30) .238 (6.05)	1.093 (27.76) 1.073 (27 25)	.432 (10 97) .412 (10 46)	060 (1 52) 035 (89)	040 (1 02) .020 (.51)
MS18270-3	3	2.103 (53 42) 2.073 (52 65)	1.516 (38 51) 1.506 (38 25)	1.857 (47.17) 1.847 (46 91)	.316 (8.03) 306 (7 77)	.509 (12.93) .479 (12 17)	.439 (11.15) .419 (10 64)	.248 (6 30) 238 (6 05)	1 635 (41 53) 1 615 (41.02)	.432 (10 97) .412 (10 46)	060 (1.52) .035 (89)	040 (1 02) 020 (.51)
MS18270-4	4	2.744 (69.76) 2.714 (68.94)	2.164 (54 97) 2 154 (54 71)	2.505 (63.63) 2 495 (63.37)	.316 (8.03) 306 (7.77)	.509 (12.93) .479 (12 17)	439 (11 15) 419 (10.64)	248 (6 30) .238 (6 05)	2 282 (57 96) 2 262 (57 45)	432 (16 97) 412 (10 46)	060 (1.52) 035 (89)	040 (1.02) 020 (.51)
MS18270-5	5	2.650 (67.31) 2 620 (66.55)	2 069 (52.55) 2.059 (52.30)	2.411 (61 24) 2 401 (60.99)	.428 (10.87) .418 (10.62)	.620 (15 75) .590 (14 99)	439 (11 15) .419 (10.64)	.248 (6 30) .238 (6 05)	2 188 (55 58) 2 168 (55 07)	544 (13 82) 524 (13 31)	060 (1 52) 035 (.89)	.040 (1 02) 020 (.51)
MS18270-6	6	2.744 (69.70) 2.714 (68.94)	2.194 (55.73) 2 184 (55 47)	2 505 (63 63) 2.495 (63 37)	490 (12 45) .480 (12.19)	683 (17.35) .653 (16.59)	439 (11 15) 419 (10 64)	248 (6 30) .238 (6 05)	2 312 (58 72) 2 292 (58 22)	606 (15 39) .586 (14.88)	060 (1 52) 035 (89)	.040 (1 02) 020 (.51)
1/ MS18270-7	1	Same as MS18270-1 except in accordance with detail B										
1/ MS18270-8	2	Same as MS18270-2 except in accordance with detail B										
1/ MS18270-9	3	Same as MS18270-3 except in accordance with detail B										
1/ MS18270-10	4	Same as MS18270-4 except in accordance with detail B										
1/ MS18270-11	5	Same as MS18270-5 except in accordance with detail B										
1/ MS18270-12	6	Same as MS18270-6 except in accordance with detail B										
1/ MS18270-13	1	Same as MS18270-1 except in accordance with detail C										
1/ MS18270-14	2	Same as MS18270-2 except in accordance with detail C										
1/ MS18270-15	3	Same as MS18270-3 except in accordance with detail C										
1/ MS18270-16	4	Same as MS18270-4 except in accordance with detail C										
1/ MS18270-17	5	Same as MS18270-5 except in accordance with detail C										
1/ MS18270-18	6	Same as MS18270-6 except in accordance with detail C										
MS18270-19	1	Same as MS18270-1 except in accordance with detail D										
MS18270-20	2	Same as MS18270-2 except in accordance with detail D										
(H) MS18270-21	3	Same as MS18270-3 except in accordance with detail D										
MS18270-22	4	Same as MS18270-4 except in accordance with detail D										
MS18270-23	5	Same as MS18270-5 except in accordance with detail D										
MS18270-24	6	Same as MS18270-6 except in accordance with detail D										

(H) 1/ Part numbers MS18270-7 thru MS18270-18 are inactive for new design, use MS18270-19 thru MS18270-24.

APPROVED 30 NOV 1967 REVISED (H) FOR CHANGES SEE PAGES 1 & 2

User activities: Army ME, Navy MC, CG, Air Force

Reviewer activities: Army MI, Navy AS, SH, Air Force 11, 99, DSA-ES

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P A NAVY-EC Other Cust AF-85 ARMY-EL	International interest	TITLE CONNECTORS, ELECTRIC, RECTANGULAR, MINIATURE, POLARIZED SHELL, RACK AND PANEL, SHELL RECEPTACLE SOCKET CONTACTS, CRIMP TYPE	MILITARY STANDARD MS18270
Procurement Specification MIL-C-24308		SUPERSEDES:	PAGE 2 OF 3

DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:18Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Insulator may project .375 (9.53) maximum.
4. Wire insulation .072 (1.83) maximum for arrangements MS18273-1, MS18274-1, MS18275-1, MS18276-1, and MS18277-1. Wire insulation .054 (1.37) maximum for arrangements MS18373-2, MS18274-2, MS18275-2, MS18276-2, MS18277-2 and MS14004-1.
5. To accommodate a .040 (1.02) diameter pin for arrangements MS18273-1, MS18274-1, MS18275-1, MS18276-1 and MS18277-1. To accommodate a .030 (.76) diameter pin for arrangements MS18273-2, MS-8274-2, MS18275-2, MS18276-2, MS18277-2 and MS14004-1.
6. Use 041/.039 (1.04/.99) diameter pin for arrangements MS18273-1, MS18274-1, MS18275-1, MS18276-1 and MS18277-1 Use .0305/.0295 (.77/.75) diameter pin for arrangements MS18273-2, MS18274-2, MS18275-2, MS18276-2, MS18277-2 and MS14004-1.
7. Patent notice The Government has a royalty free license under the U S Patents listed below for the benefit of manufacturers of the items disclosed and described herein, either for the Government or for use in equipment delivered to the Government.

Patent Numbers

2790153 expires April 23, 1974
3110093 expires November 12, 1980
3158424 expires November 24, 1981

8. Copyright notice All information disclosed in this military standard which is or may be copyrighted by ITT Cannon Electric is reproduced herein with the express permission of the copyright owner.

INCHES	MM	INCHES	MM
.004	.10	.092	2.34
.005	.13	.097	2.46
.008	.20	.103	2.62
.010	25	.115	2.92
.031	.79	.120	3.05
.040	1.02	.125	3.18
.041	1.04	.129	3.28
.062	1.57	.143	3.63
.070	1.78	.375	9.53
.086	2.18		

Reviewer activities: Army AS, MI; Navy AS, SH; Air Force 11, 99; DSA-ES
User activities: Army ME; Navy MC, CG; Air Force
This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:18Z
Check the source to verify that this is the current version before use.