
FED. SUP CLASS
2090

REQUIREMENTS:

1. Material. Markers shall be of adhesive-coated reflective sheeting (see figures 1 through 7 and 11 through 20) and accessory overlay markers of adhesive-coated transparent polyester plastic film (see figures 8 through 10).
2. Adhesive. All markers shall be precoated with a pressure-sensitive adhesive for ready application to smooth and moderately rough surfaces such as bulkheads, passageway walls, hulls and superstructure throughout a wide range of application temperatures (see figures 1 through 7 and 11 through 20).
3. Reflective sheeting. The reflective sheeting shall meet the requirements for type I, class 4, reflectivity 1, color g (silver-white 1) of L-S-300 (see figures 1 through 7 and 11 through 20).
4. *Transparent film. The adhesive-coated transparent film for overlays shall be a flexible polyester plastic film recommended as compatible with the reflective sheeting in accordance with L-S-300 (see figures 8 through 10).*
5. Size, color and design. Marker sizes, designs and colors shall be as shown on figures 1 through 20. Additional sizes or designs shall be as specified by the contracting officer.
6. General characteristics and packaging. The markers shall be free from ragged edges, streaks, blisters, foreign matter, or other surface imperfections which would make them unsuitable for the intended usage. Complete and detailed instructions for applying the markers shall be supplied with each shipment. The markers shall be packaged in suitable containers in such a manner that no damage or defacement may occur during normal transport to destination.

NOTES:

1. For design feature purposes, this standard takes precedence over procurement documents *referenced herein.*
2. Referenced documents shall be of the issue in effect on date of invitations for bid.

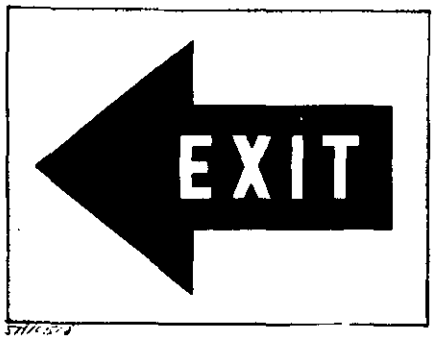

Final overall size: 6 x 8 inches

1-3/4 inch silver-white legend on opaque black single-headed arrow on a silver-white reflective background.

Opaque colors on the marker shall be screen process and shall be protected by a compatible clear overcoating. Colors and clear overcoating shall be as recommended by the sheeting manufacturer.

Figure 1 - Single arrow exit marker (left).



Final overall size: 6 x 8 inches

1-3/4 inch silver-white legend on opaque black single-headed arrow on a silver-white reflective background.

Opaque colors on the marker shall be screen process and shall be protected by a compatible clear overcoating. Colors and clear overcoating shall be as recommended by the sheeting manufacturer.

Figure 2 - Single arrow exit marker (right).


APPROVED 3 November 1972 REVISED

This military standard is approved by the Naval Ship Engineering Center, Department of the Navy, and shall be used by that activity. All other activities are required to employ this standard where suitable.

P.A. SH Other Cust	TITLE EGRESS MARKING SYSTEM	MILITARY STANDARD MS18302(SHIPS)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 7

DD FORM 1 SEP 67 672-1 N LIMITED COORDINATION PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:19Z
Check the source to verify that this is the current version before use.

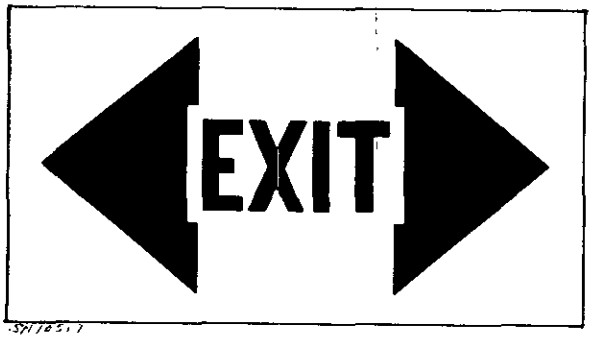


SH1057

Final overall size: 6 x 11 inches

Opaque hollow shafted, double-headed arrow with inset 1-3/4 inch high opaque black legend on a silver-white reflective background.

Opaque colors on the markers shall be screen process and shall be protected by a compatible clear overcoating. Colors and clear overcoating shall be as recommended by the sheeting manufacturer.

Figure 3 - Double arrow.

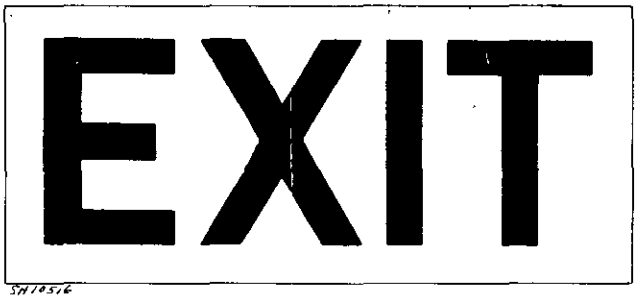

SH1056

Final overall size: 4 x 9 inches

3-inch word EXIT of opaque black on a silver-white background.

Opaque colors on the marker shall be screen process and shall be protected by a compatible clear overcoating. Colors and clear overcoating shall be as recommended by the sheeting manufacturer.


Figure 4 - Exit marker.

This military standard approved by the Naval Ship Engineering Center, Department of the Navy, and shall be used by that activity. All other activities are required to employ this standard where suitable.

APPROVED 3 November 1972 REVISED

P.A. SH Other Cust	TITLE EGRESS MARKING SYSTEM	MILITARY STANDARD MS18302(SHIPS)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 2 OF 7

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:19Z
Check the source to verify that this is the current version before use.

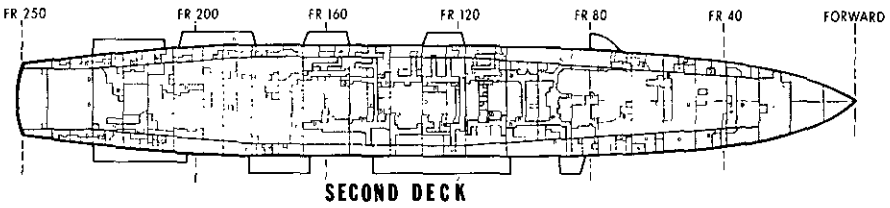

SECOND DECK

SH /6.5 / 5

10 by 32-1/2 inches.

Transparent green (passageways) and yellow (berthing areas) and opaque black on silver-white reflective background. Mark approximately every 40th frame with 3/8 inch number. Mark UP ladders with 3/16 inch "U" mark DOWN ladders with 3/16 inch "D". Show bulkheads.


Transparent and opaque colors on the marker shall be screen process and shall be protected by a compatible clear overcoating. Colors and clear overcoating shall be as recommended by the sheeting manufacturers.

Figure 5 - Color-coded full deck marker (typical).

This military standard is approved by the Naval Ship Engineering Center, Department of the Navy, and shall be used by that activity. All other activities are required to use this standard where suitable.

APPROVED 3 November 1972 REVISED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:19Z
Check the source to verify that this is the current version before use.

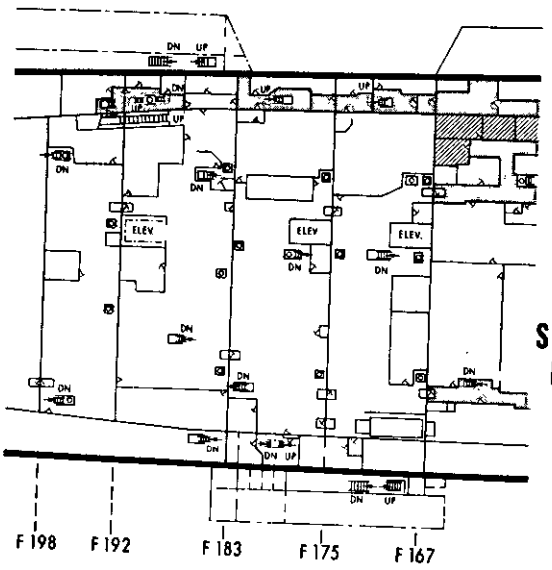


SH10514

11 by 12 inches

Transparent green (passageways) and yellow (berthing areas) and opaque black on silver-white reflective background. Mark approximately every 8th frame with 1/4 inch numbers. Mark UP ladders with 3/16 inch "U"; DOWN ladders with "D". Show bulkheads, berths and accesses.

Transparent and opaque colors on the marker shall be screen process and shall be protected by a compatible clear overcoating. Colors and clear overcoating shall be as recommended by the sheeting manufacturer.

Figure 6 - Color-coded deck section enlargement marker (typical).

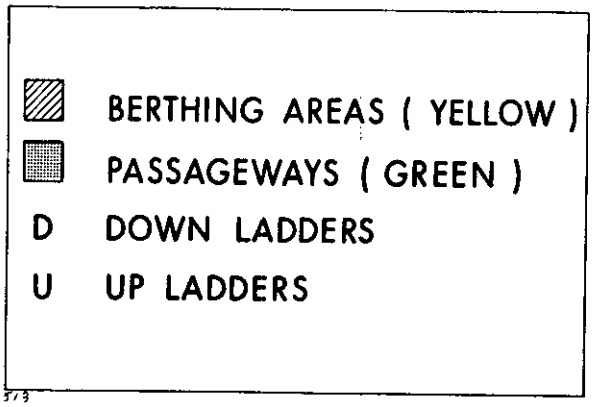

SH10513

Final overall size: 4 x 6 inches.

Silver-white reflective background with opaque black copy, tranparent yellow square (for berthing areas), transparent green square (for passageways) "U" (for UP ladders); "D" (for DOWN ladders).

Transparent and opaque colors on the marker shall be screen process and shall be protected by a compatible clear overcoating. Colors and clear overcoating shall be as recommended by the sheeting manufacturer.


Figure 7 - Color-code marker.

This military standard is approved by the Naval Ship Engineering Center, Department of the Navy, and shall be used by that activity. All other activities are required to employ this standard where suitable.


APPROVED 3 November 1972 REVISED

P.A. SH Other Cust	TITLE EGRESS MARKING SYSTEM	MILITARY STANDARD MS18302(SHIPS)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 4 OF 7

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:19Z
Check the source to verify that this is the current version before use.



Final overall size: 1/2 x 1/2 inch
Black arrow on transparent film background.
Figure 8 - Small arrow overlay marker.



Final overall size: 1 x 2-1/2 inches.
Opaque black arrow on transparent film background.
Figure 9 - Large arrow overlay marker.



Final overall size: 1/2 x 5 inches.
Opaque black legend on transparent film background.
Figure 10 - You are here overlay marker.

The following is applicable to figures 8, 9 and 10.
Opaque black on the markers shall be screen process and shall be protected by a compatible clear overcoating. Clear overcoating shall be as recommended by the sheeting manufacturers.



Final overall size: 3 x 12 inches.
Opaque black arrow on silver-white reflective background.

Opaque colors on the markers shall be screen process and shall be protected by a compatible clear overcoating. Colors and clear overcoating shall be as recommended by the sheeting manufacturer.

Figure 11 - Arrow marker.



Final overall size: 10 x 1-1/2 inches.
Figure 12 - Hangar deck marker.



Final overall size: 10 x 1-1/2 inches.
Figure 13 - Weather deck marker.

This military standard is approved by the Naval Ship Engineering Center, Department of the Navy, and shall be used by that activity. All other activities are required to employ this standard where suitable.

APPROVED 3 November 1972 REVISED

P.A. SH Other Cust	TITLE EGRESS MARKING SYSTEM	MILITARY STANDARD MS18302(SHIPS)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 5 OF 7

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:19Z
Check the source to verify that this is the current version before use.



Final overall size: 10 x 1-1/2 inches.
Figure 14 - Flight deck marker.



Final overall size: 10 x 1-1/2 inches.
Figure 15 - Starboard marker.



Final overall size: 10 x 1-1/2 inches.
Figure 16 - Emergency marker.




Final overall size: 5 x 1-1/2 inches.
Figure 17 - Port marker.



Final overall size: 5 x 1-1/2 inches.
Figure 18 - Access marker.

The following is applicable to figures 12 through 18.
1-1/2 inches high with 1 inch opaque black legend, length shall be as shown on figures 15 through 21, on silver-white reflective background.

Opaque colors on the markers shall be screen process and shall be protected by a compatible clear overcoating. Colors and clear overcoating shall be as recommended by the sheeting manufacturer.

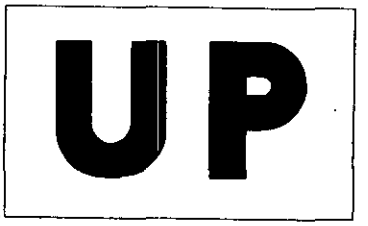

Final overall size: 5 x 3 inches.
Figure 19 - Up marker.


APPROVED 3 November 1972 REVISED

This military standard is approved by the Naval Ship Engineering Center, Department of the Navy, and shall be used by that activity. All other activities are required to employ this standard where suitable.

P.A. SH Other Cust	TITLE EGRESS MARKING SYSTEM	MILITARY STANDARD MS18302(SHIPS)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 6 OF 7

DD FORM 1 SEP 67 672-1 N LIMITED COORDINATION PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:19Z
Check the source to verify that this is the current version before use.

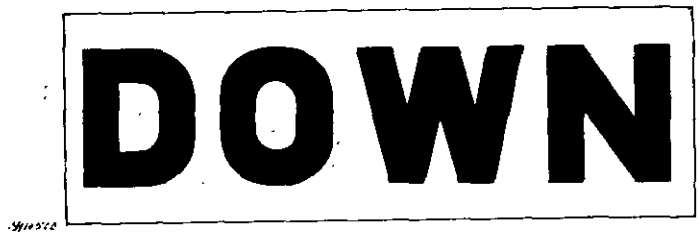

Final overall sizes: 9 x 3 inches.
Figure 20 - Down marker.

The following is applicable to figures 19 and 20:

3 inches high with 2-inch opaque black legend (length shall be as shown on figures 19 and 20), on silver-white reflective background.
Opaque colors on the markers shall be screen process and shall be protected by a compatible clear overcoating. Colors and clear overcoating shall be as recommended by the sheeting manufacturer.

This military standard is approved by the Naval Ship Engineering Center, Department of the Navy, and shall be used by that activity. All other military activities are required to employ the standard where suitable.

APPROVED 3 November 1972 REVISED

Project 2090-N050

P.A. SH Other Cust	TITLE EGRESS MARKING SYSTEM	MILITARY STANDARD MS18302(SHIPS)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 7 OF 7

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:19Z
Check the source to verify that this is the current version before use.