INCH-POUND

MS24286E
w/Amendment 1
21 April 2023
SUPERSEDING
MS24286E
14 July 2005

DETAIL SPECIFICATION SHEET


CONNECTORS, ELECTRICAL, STYLE P, RACK AND PANEL, MINIATURE

Inactive for new design after 8 June 1999.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-83733.

The Qualified Products List (QPL) associated with this inactive for new design specification will be maintained until acquisition of the product is no longer required, where upon the specification and QPL will be canceled.

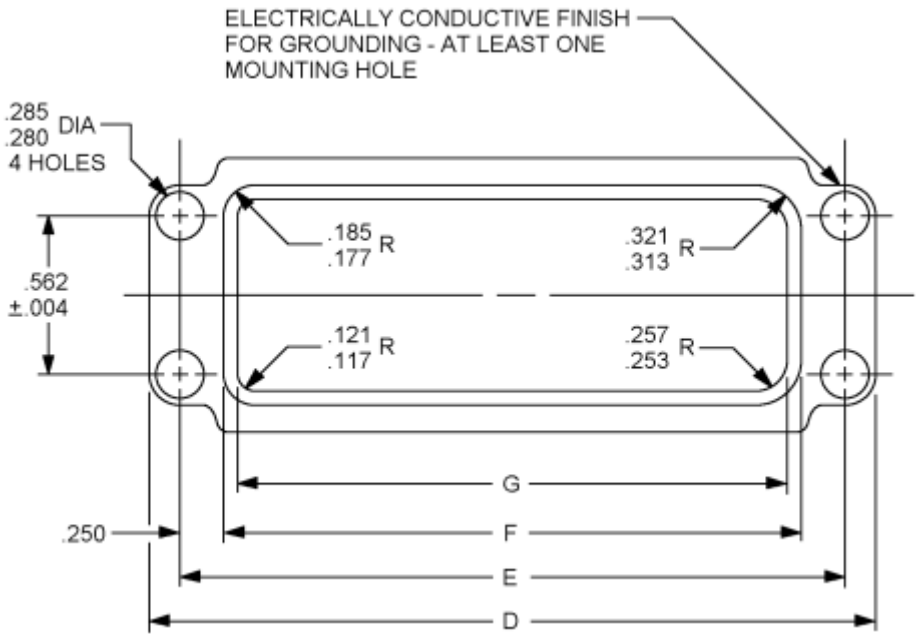


Style P (pin insert)

FIGURE 1. Connector dimensions and configurations.

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:51Z
Check the source to verify that this is the current version before use.

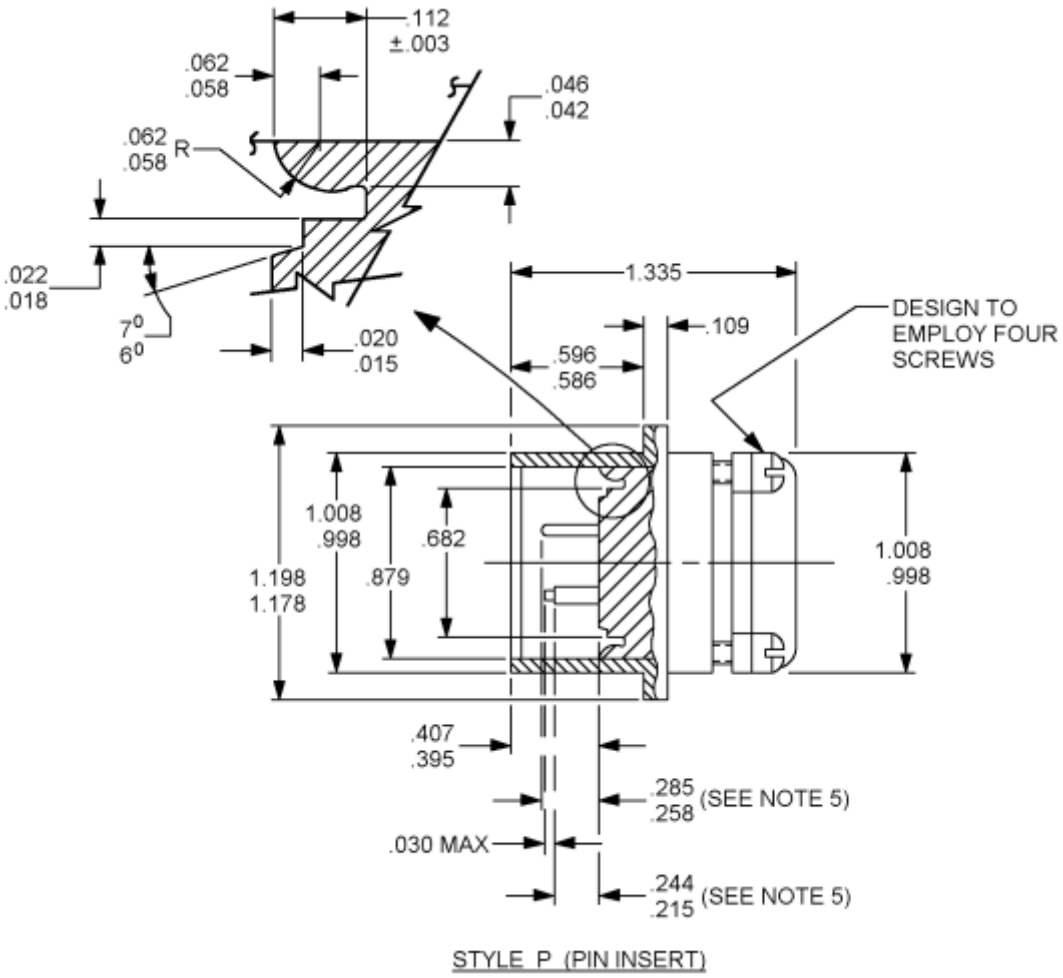

Environment Resistant (R) Receptacles

Shell size	D ±.005	E ±.004	F ±.005	G
A	4.296	3.875	3.375	3.215
B	2.866	2.445	1.948	1.821
C	2.421	2.000	1.516	1.292

FIGURE 1. Connector dimensions and configurations - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:51Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm
.003	0.08	.185	4.70	.998	25.35
.004	0.10	.215	5.46	1.008	25.60
.015	0.38	.244	6.20	1.178	29.92
.018	0.46	.250	6.35	1.198	30.43
.020	0.51	.253	6.43	1.292	32.82
.022	0.56	.257	6.53	1.335	33.91
.030	0.76	.258	6.55	1.516	38.51
.042	1.07	.285	7.24	1.821	46.25
.046	1.17	.313	7.95	1.948	49.48
.058	1.47	.321	8.15	2.000	50.80
.062	1.57	.395	10.03	2.421	61.49
.109	2.77	.407	10.34	2.445	62.10
.112	2.84	.567	14.40	2.866	72.80
.119	3.02	.586	14.88	3.215	81.66
.121	3.07	.596	15.14	3.375	85.73
.177	4.50	.682	17.32	3.875	98.43
		.879	22.33	4.296	109.11

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified tolerances are ±.003 inch (0.08 mm).
4. For insert arrangements see MS24288.
5. Dimension on socket contact location applies when contacts are placed in inserts for inspection or application.

FIGURE 1. Connector dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:51Z
Check the source to verify that this is the current version before use.

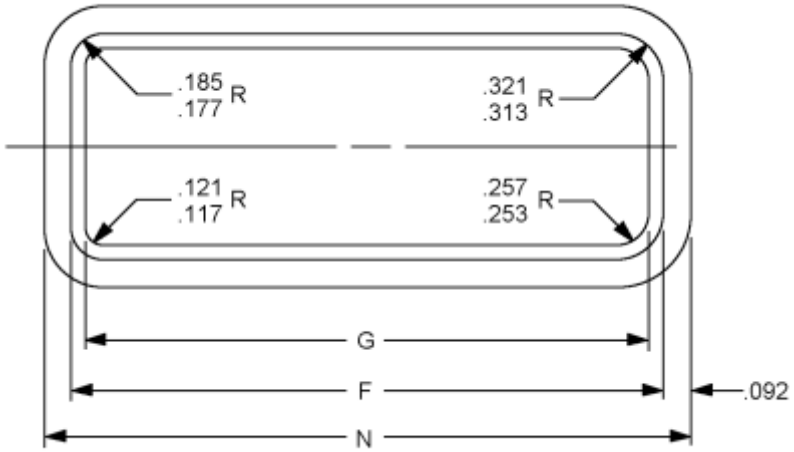


Inches	mm	Inches	mm
.003	0.08	.185	4.70
.015	0.38	.253	6.43
.018	0.46	.257	6.53
.020	0.51	.258	6.55
.022	0.56	.285	7.24
.031	0.79	.313	7.95
.042	1.07	.321	8.15
.046	1.17	.395	10.03
.058	1.47	.407	10.34
.062	1.57	.586	14.88
.092	2.34	.596	15.14
.093	2.36	.682	17.32
.109	2.77	.879	22.33
.117	2.97	.998	25.35
.121	3.07	1.008	25.60
.177	4.50	1.178	29.92
		1.198	30.43

Style P (pin insert)

Hermetic (H) receptacles

FIGURE 2. Connector dimensions and configurations

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:51Z
Check the source to verify that this is the current version before use.

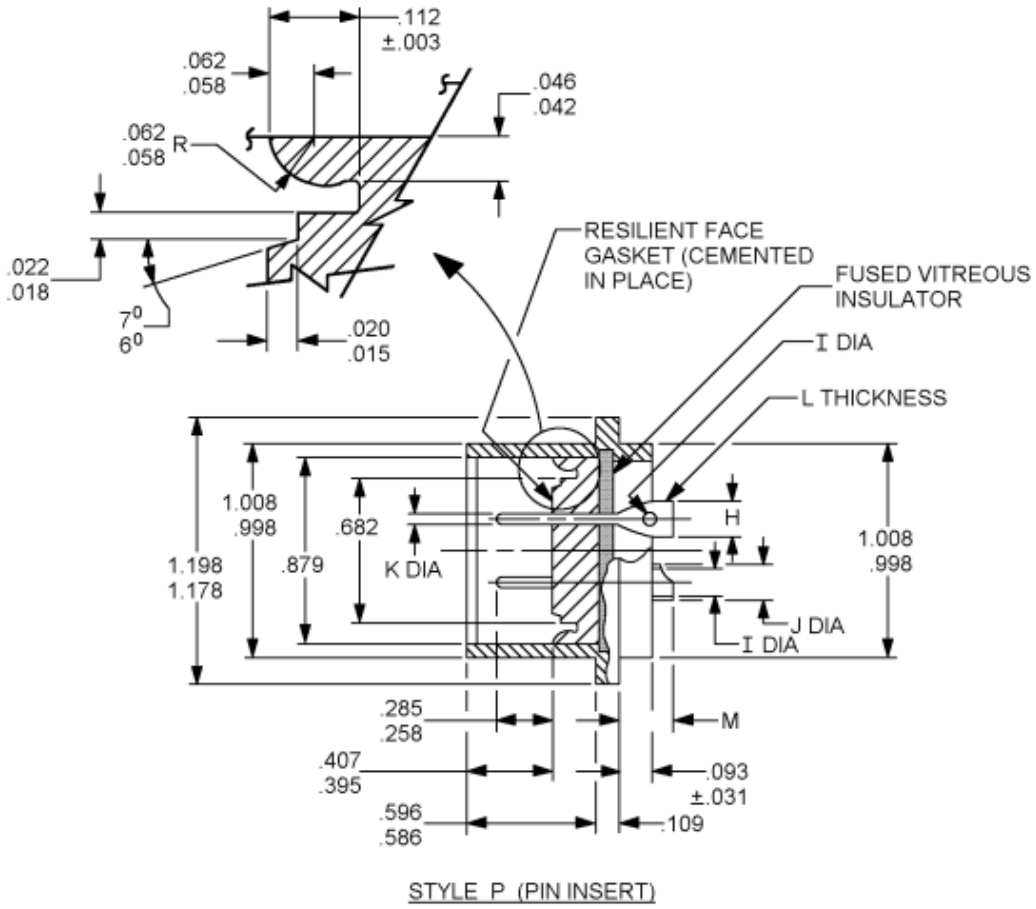

STYLE P (PIN INSERT)

Shell size	N ±.005	F ±.005	G
A	3.560	3.375	3.251
B	2.130	1.945	1.821
C	1.685	1.516	1.392

Size of contact	Type of contacts	H	I Dia		J Dia		K Dia		L	M
			Max	Min	Max	Min	Max	Min		Max
12	Solder cup		.102	.098	.153	.147	.095	.093		.300
12	Eyelet	.200	.102	.098			.095	.093	.035	.300
16	Solder cup		.68	.066	.105	.101	.063	.061		.300
16	Eyelet	.125	.68	.066			.063	.061	.025	.300
20	Solder cup		.050	.048	.078	.076	.041	.039		.230
20	Eyelet	.080	.050	.048			.041	.039	.015	.230

FIGURE 2. Connector dimensions and configurations – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:51Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm
.005	0.13	.101	2.57
.015	0.38	.102	2.59
.025	0.64	.105	2.67
.035	0.89	.147	3.73
.039	0.99	.153	3.89
.041	1.04	.230	5.84
.048	1.22	.300	7.62
.050	1.27	.68	17.3
.061	1.55	1.392	35.36
.063	1.60	1.516	38.51
.066	1.68	1.685	42.80
.076	1.93	1.821	46.25
.078	1.98	1.945	49.40
.093	2.36	2.130	54.10
.095	2.41	3.251	82.58
.098	2.49	3.375	85.73
		3.560	90.42

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified tolerances are ±.003 inch (0.08 mm).
4. For insert arrangement see MS24288.
5. Dimension on socket contact location applies when contacts are placed in inserts for inspection or application.

FIGURE 2. Connector dimensions and configurations – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:51Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration see figure 1.

Materials shall be in accordance with MIL-DTL-83733.

For mating and mounting details see MS24287 and MS24288

Classes

Part or Identifying Number (PIN):



Referenced documents: In addition to MIL-DTL-83733 this document references the following:

MS24287
MS24288

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

CONCLUDING MATERIAL

Custodians:
Air Force – 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2023-031)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:51Z
Check the source to verify that this is the current version before use.

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:51Z
Check the source to verify that this is the current version before use.