

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

User activities - Army - Navy - Air Force -

Review activities: Army - ER, AR, MI Navy - AS, EC Air Force - 11, 17, 99

FED. SUP CLASS 5930

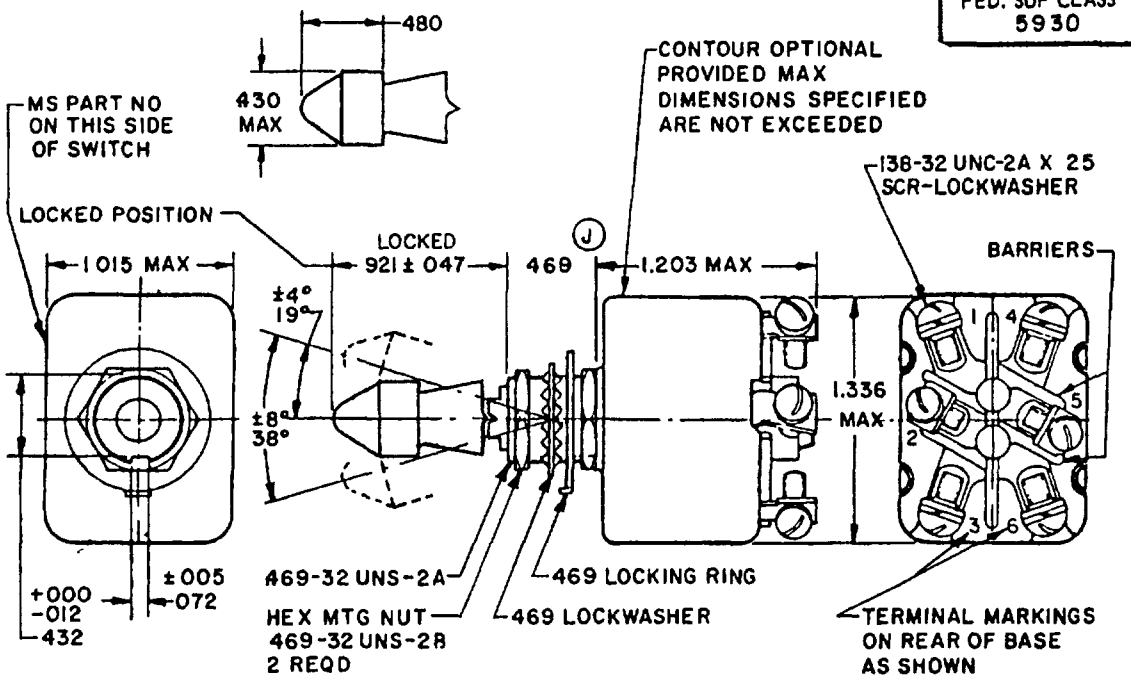

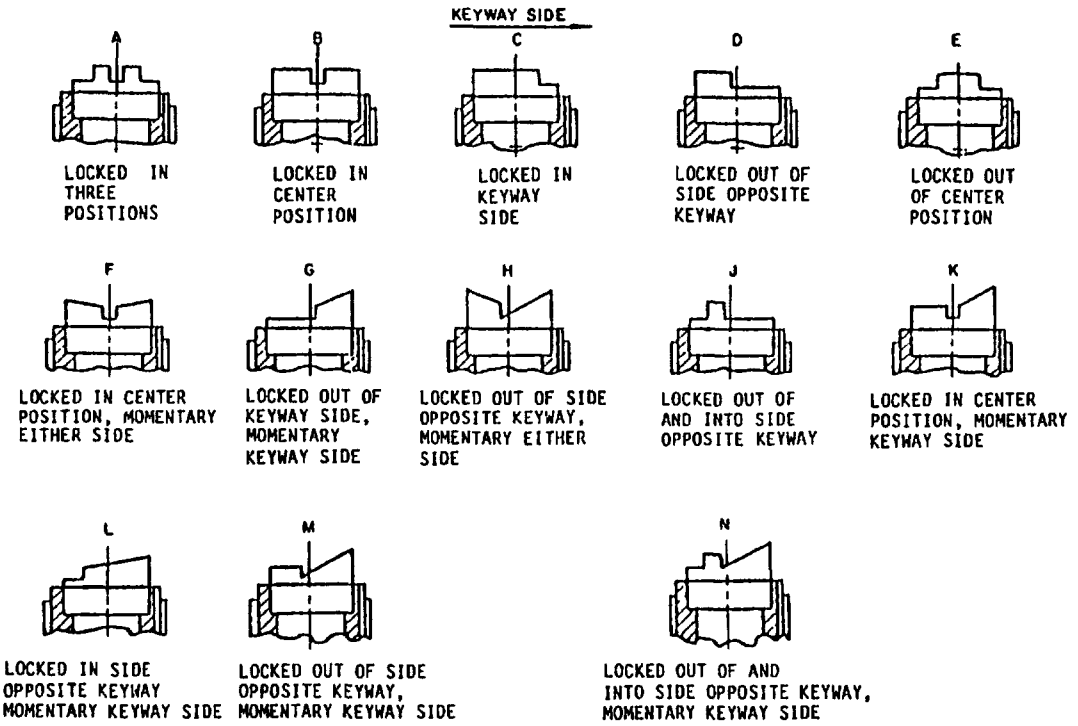

FIGURES A thru N. Illustrate the locking and momentary configurations and not the detail construction of the locking design.

Ⓙ Denotes change

APPROVED 18 AUG 60 REVISED Ⓙ 30 SEP 86

P A AF-85 Other Cust ARMY-ER NAVY-AS	International Interest ASCCAS 12/16A	TITLE SWITCH, TOGGLE, POSITIVE BREAK, LEVER LOCK, ENVIRONMENTALLY SEALED, SCREW TERMINAL, DOUBLE POLE, .469 MOUNTING BUSHING, 25 AMPERES	MILITARY STANDARD MS24613
Procurement Specification MIL-S-8834		SUPERSEDES: MS0024613(USAF)	PAGE 1 OF 4

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5930-1331-05

AMSC N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:58Z
Check the source to verify that this is the current version before use.

Distribution Statement A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

Review activities: Army - ER,AR,MI; Navy - AS,EC; Air Force - 11,17,99

User activities: Army - ; Navy - ; Air Force -

MS DASH NO. ENVIRONMENTAL SEALED	LOCKING COMB.	CIRCUIT MADE BETWEEN TERMINALS AS INDICATED WITH THE TOGGLE LEVER IN THESE POSITIONS			CURRENT CAPACITY AMPERES PER POLE 28 VOLTS DC			CURRENT CAPACITY AMPERES PER POLE 115 VOLTS 400 HERTZ			CURRENT CAPACITY AMPERES PER POLE 115 VOLTS 60 HERTZ		
		OPPOSITE KEYWAY SIDE	CENTER POSITION	KEYWAY SIDE	LAMP LOAD CIRCUIT	RESISTIVE CIRCUIT	INDUCTIVE CIRCUIT	LAMP LOAD CIRCUIT	RESISTIVE CIRCUIT	INDUCTIVE CIRCUIT	LAMP LOAD CIRCUIT	RESISTIVE CIRCUIT	INDUCTIVE CIRCUIT
212	A,B,C,D,E	ON 2-3,5-6	OFF	ON 1-2,4-5	7	25	15	7	25	15	7	20	15
222	C,E		NONE	OFF									
232				ON 1-2,4-5									
242	J,B		OFF	NONE									
262	L		NONE										
272	F,H	MOM-ON 2-3,5-6	OFF	MOM-ON 1-2,4-5									
282	K	NONE											
292	L	ON 2-3,5-6	NONE	MOM-OFF									
302		OFF		MOM-ON 1-2,4-5									
312	G,K,M N	ON 2-3,5-6	OFF										

Procurement Specification: MIL-S-8834

Other Cust: ARMY - ER; NAVY - AS

P.A AF - 85

International Interest: ASCCAS 12/16A

SUPERSEDES: MS0024613

TITLE: SWITCH, TOGGLE, POSITIVE BREAK, LEVER LOCK, ENVIRONMENTALLY SEALED, SCREW TERMINAL, DOUBLE POLE, .469 MOUNTING BUSHING, 25 AMPERES

MILITARY STANDARD

MS 24613

PAGE 2 OF 4

FED. SUP CLASS 5930

DD FORM 1 MAY 73 672

APPROVED 18 Aug 60

REVISED (d) For changes see pages 1 & 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:58Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

Review activities. Army - ER, AR, MI
Navy - AS, EC
Air Force - 11, 17, 99

User activities Army -
Navy -
Air Force -

P.A AIR FORCE-85
Other Cust ARMY-ER
NAVY-AS

Procurement Specification MIL-S-8834

International Interest ASCC AS
12/16A

SUPERSEDES MS0024613

TITLE SWITCH, TOGGLE, POSITIVE BRFAK, LEVER LOCK, ENVIRONMENTALLY SEALED, SCREW TERMINAL, DOUBLE POLE, 469 MOUNTING BUSHING, 25 AMPERES

MILITARY STANDARD

MS24613

PAGE 3 OF 4

FED. SUP CLASS 5930

DD FORM 1 MAY 73 672

(J)

MS DASH NO. ENVIRON-MENTAL SEALED	CURRENT CAPACITY 1/ AMPERES PER POLE 250 VOLTS 60 HERTZ AC			CURRENT CAPACITY 1/ AMPERES PER POLE 125 VOLTS DC			CURRENT CAPACITY 1/ AMPERES PER POLE 250 VOLTS DC			LIFE LOW CURRENT LEVEL SWITCHING 30 mV
	LAMP LOAD CIRCUIT	RESIS-TIVE CIRCUIT	INDUC-TIVE CIRCUIT	LAMP LOAD CIRCUIT	RESIS-TIVE CIRCUIT	INDUC-TIVE CIRCUIT	LAMP LOAD CIRCUIT	RESIS-TIVE CIRCUIT	INDUC-TIVE CIRCUIT	
212										
222										
232										
242										
262										
272		10	7		750 mA	-		500 mA	-	10 mA
282										
292										
302										
312										

APPROVED 18 AUG 60

REVISED (J) FOR CHANGES SEE PAGES 1 & 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:58Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

User activities: Army - ; Navy - ; Air Force -

Review activities: Army - ER, AR, MI; Navy - AS, EC; Air Force - 11, 17, 99

MS DASH NO	SUPERSEDED DASH NO SEALED		
ENVIRON-MENTAL SEALED	TOGGLE	ENVIRON-MENTAL	TOGGLE
212	-21	-21S	-211
222	-22	-22S	-221
232	-23	-23S	-231
242	-24	-24S	-241
262	-26	-26S	-261
272	-27	-27S	-271
282	-28	-28S	-281
292	-29	-29S	-291
302	-30	-30S	-301
312	-31	-31S	-311

EXAMPLE OF PART NUMBERS MS24613B212 = ON-OFF-ON, ENVIRONMENTAL SEALED, LOCKED IN CENTER OFF POSITION
MS24613F272 = MOM-ON, OFF, MOM-ON, ENVIRONMENTAL SEALED LOCKED IN CENTER OFF POSITION

THE MS DASH NUMBERS SUPERSEDE AND ARE COMPLETELY INTERCHANGEABLE WITH THE SUPERSEDED DASH NUMBERS

INCHES	mm	INCHES	mm
.005	.13	.432	10.97
.012	.30	.469	11.91
.047	1.19	.480	12.19
.072	1.83	.921	23.39
.138	3.51	1.015	25.78
.25	6.35	1.203	30.56
.430	10.92	1.336	33.93

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only
3 Unless otherwise specified, tolerances are ±.010 (0.25 mm) on decimals and ± 5° on angles
4 For hardware and terminal screw detail specifications see appendix of MIL-S-8834
5. For design feature purposes, this standard takes precedence over acquisition ducuments referenced herein.
5. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this standard to the extent specified herein.
7. The superseded dash numbers are inactive for design after 20 Jul 1962.
8. Maximum weight. .1453 pound (65 9 grams).
9. Unlocking force = 4 ±1 pound
10. Altitude requirements 80,000 feet.
11 115 V ac 60 hertz electrical endurance tests are to be performed at room temperature and pressure.

APPROVED 18 Aug 60 REVISED (A) For changes see pages 1 & 3

P A AF - 85 Other Cust ARMY - ER NAVY - AS	International interest ASCCAS 12/16A	TITLE SWITCH, TOGGLE, POSITIVE BREAK, LEVER LOCK, ENVIRONMENTALLY SEALED, SCREW TERMINAL, DOUBLE POLE, .469 MOUNTING BUSHING, 25 AMPERES	MILITARY STANDARD MS 24613
Procurement Specification MIL-S-8834		SUPERSEDES MS0024613(USAF)	PAGE 4 OF 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:58Z
Check the source to verify that this is the current version before use.