INCH-POUND
MS27496H
w/AMENDMENT 1
29 October 2024
SUPERSEDING
MS27496H
2 February 2012

DETAIL SPECIFICATION SHEET

CONNECTORS, RECEPTACLE, ELECTRICAL, BOX MOUNTING, CRIMP TYPE, BAYONET COUPLING, SERIES I

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-38999.

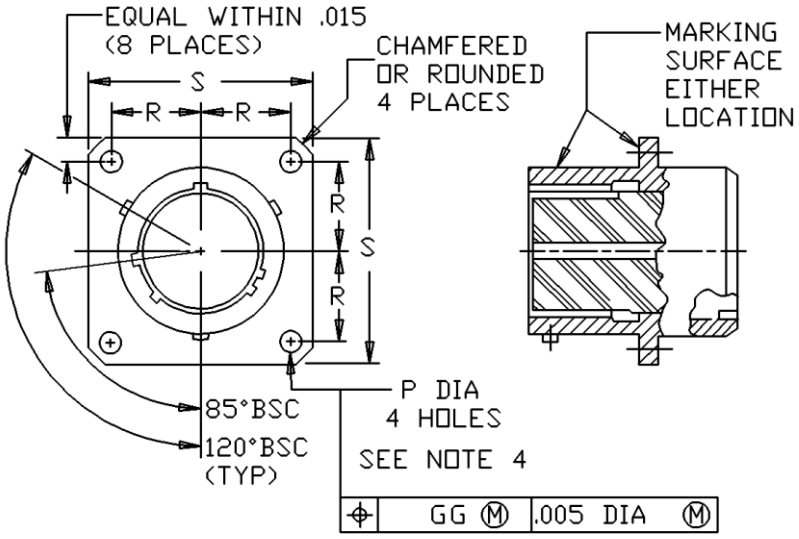


FIGURE 1. Receptacle, class E.

AMSC N/A FSC 5935
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:42Z
Check the source to verify that this is the current version before use.

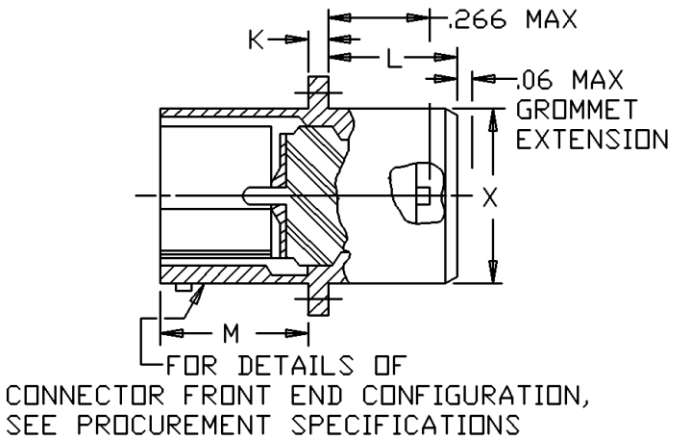


FIGURE 1. Receptacle, class E - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:42Z
Check the source to verify that this is the current version before use.

Shell size	K +.015 -.000	L max	M +.000 -.005	P dia +.010 -.005	R BSC	S ±.020	X max dia
9	.085	.312	.632	.128	.3595	.938	.469
11					.406	1.031	.594
13					.453	1.125	.719
15					.4845	1.219	.844
17					.531	1.312	.969
19					.578	1.438	1.078
21	.115		.602	.147	.625	1.562	1.203
23					.6875	1.688	1.328
25					.750	1.812	1.453

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.005	0.13	.3595	9.13	.625	15.88	1.125	27.58
.007	0.18	.406	10.31	.632	16.05	1.203	30.56
.010	0.25	.453	11.51	.6875	17.46	1.219	30.96
.015	0.38	.469	11.91	.719	18.26	1.312	33.32
.020	0.51	.4845	12.31	.750	19.05	1.328	33.73
.085	2.16	.531	13.49	.844	21.44	1.438	36.53
.115	2.29	.560	14.22	.938	23.83	1.453	36.91
.128	3.25	.578	14.68	.969	24.61	1.562	39.67
.147	3.73	.594	15.09	1.031	26.19	1.688	42.88
.266	6.76	.602	15.29	1.078	26.38	1.812	46.02
.312	7.92						

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. For main keyway and keyway positions, see MIL-DTL-38999.
4. The gauge features for GG shall be .010 (0.25 mm) smaller than the MMC size at basic location.


FIGURE 1. Receptacle, class E - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:42Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.
Interface dimensions shall be in accordance with MIL-DTL-38999.
Mating connectors: MS27467, MS27661 and MS27653.
Insert arrangements: See MIL-STD-1560.

Part or Identifying Number (PIN) example:

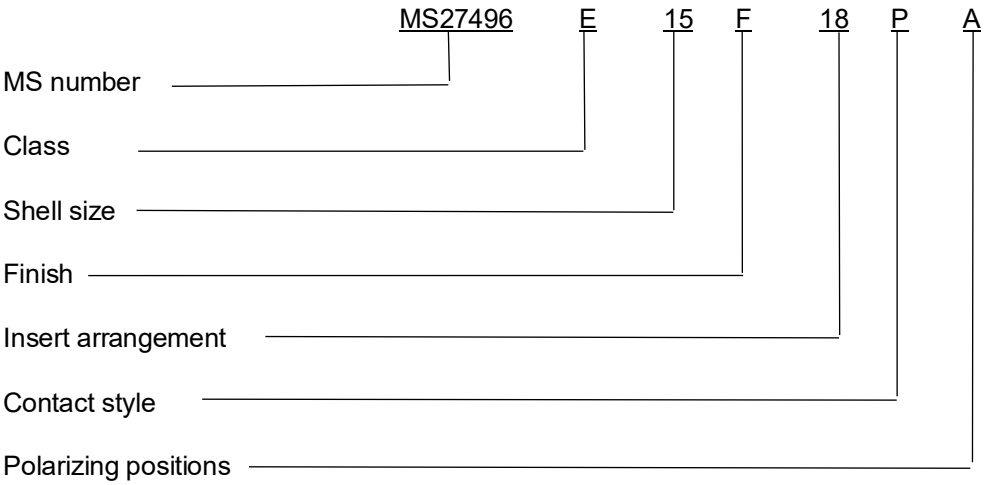

No letter is required for normal.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-38999, this document references the following:

MIL-STD-1560
MS27467
MS27661
MS27653

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:42Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force – 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2024-168)

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:42Z
Check the source to verify that this is the current version before use.