
PROJ NO. 5945-F258

FED. SUP CLASS 5945

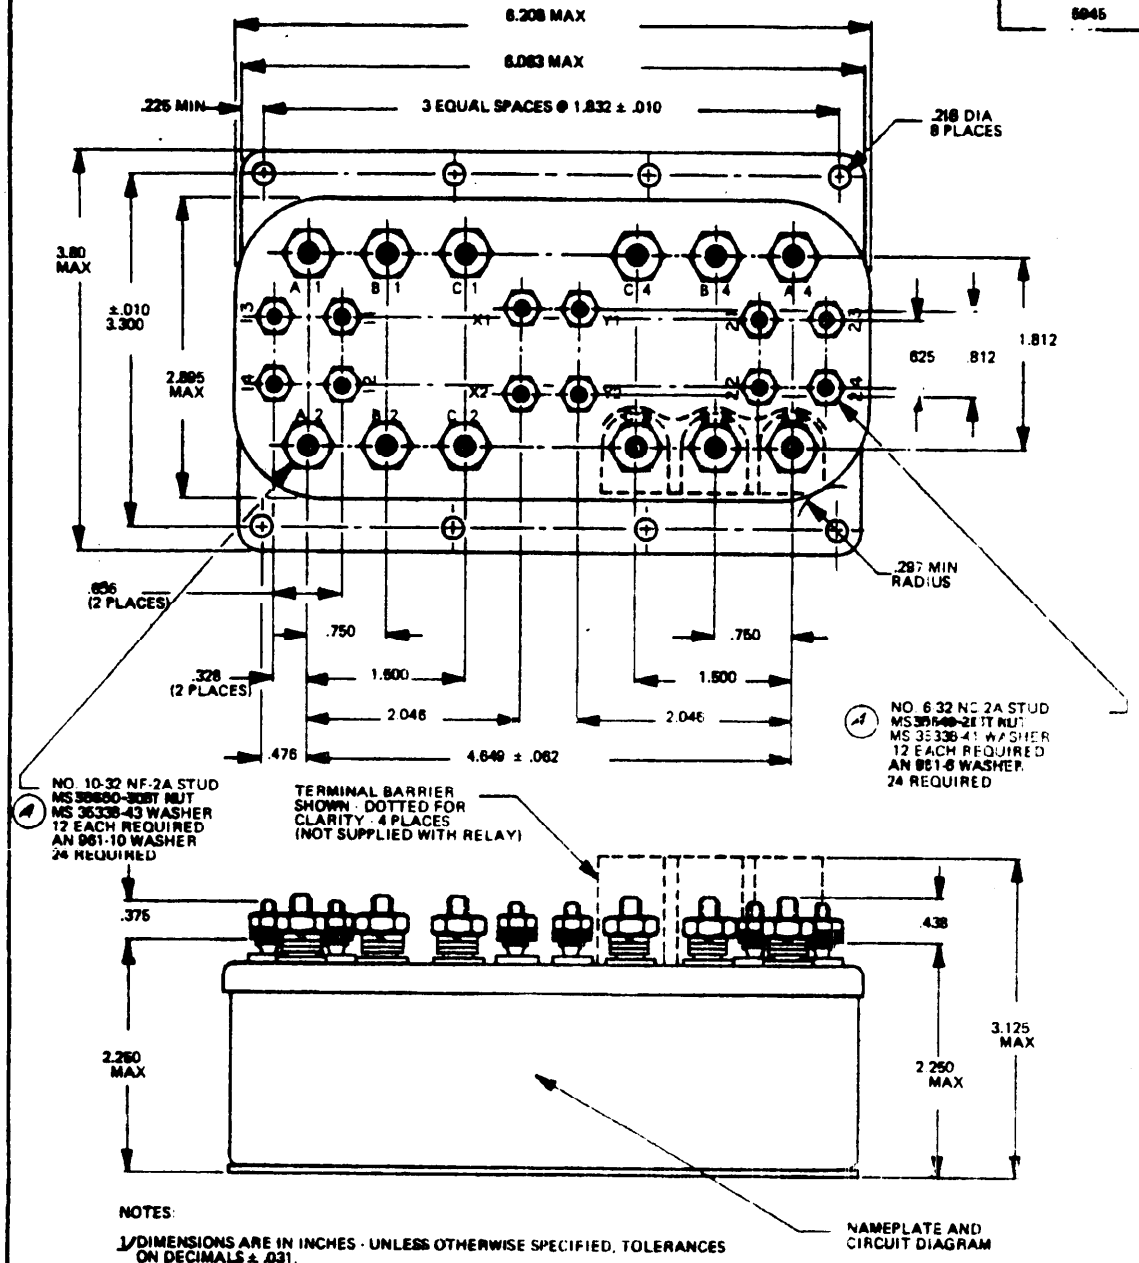

NOTES:

1/ DIMENSIONS ARE IN INCHES - UNLESS OTHERWISE SPECIFIED, TOLERANCES ON DECIMALS ± .031.

2/ REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS.

3/ THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

4/ WEIGHT SHOWN IS WITHOUT TERMINAL COVERS AND BARRIERS.

MS PART NUMBER	TYPE	COIL		TERMINAL TYPE	MOUNTING	MAX. WEIGHT IN POUNDS 4/
		X	Y			
MS27707-1	1	DC	DC	SCREW	BRACKET	2.9
MS27707-2	1	AC	AC	SCREW	BRACKET	2.9
MS27707-3	1	DC	AC	SCREW	BRACKET	2.9

P.A. USAF 80
Other Cust

TITLE

RELAY, 50 AMP, 2-3 PST NO., DOUBLE BREAK, MECHANICAL INTERLOCK (CENTER OFF) LOAD TRANSFER, TYPE I, HERMETICALLY SEALED

PROCUREMENT SPECIFICATION MIL-R-6106

SUPERSEDES:

MILITARY STANDARD

MS27707 (USAF)

SHEET 1 OF 2

APPROVED 5 January 1967 REVISED (A) 17 JANUARY 72

This standard has been approved by the AFLC (80) Department of the Air Force and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

DD FORM 1 SEP 63 672 (Limited Coordination)

EDITION OF 1 SEP 57 MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:48Z
Check the source to verify that this is the current version before use.

OPERATING CHARACTERISTICS

FED. SUP CLASS 5945


MS PART NO. MS27707	COIL	COIL DATA: Nominal Volts	Nominal Freq Hz	Nominal Res Ω	Max. Volts	Max. Amp	Max Pick-up Voltage: Normal 1/	Max Pick-up Voltage: High Temp Test	Max Pick-up Voltage: Cont Current Test	Drop Out Voltage 1/	TIME-MILLISECONDS - MAX. 4/: Operate	Release	Bounce: Main NO	Bounce: Main NC	Bounce: Aux NO	Bounce: Aux NC
MS-27707-1	X-Y	28	DC	–	29	0.6	18	21	22.5	1.8 – 7	25	10	2	–	4	4
MS27707 2	X-Y	115	400	–	124	0.2	90	100	104	5–40	35	50	2	–	4	4
MS27707-3	X	28	DC	–	29	0.6	18	21	22.5	1.5–7	25	10	2	–	4	4
	Y	115	400	–	124	0.2	90	100	104	5–40	35	50	2	–	4	4

RATED CONTACT LOAD (AMPERES PER POLE) CASE GROUNDED

TYPE OF LOAD	LIFE OPERATING CYCLES x 10³	28 VDC: Main NO	28 VDC: Main NC	28 VDC: Aux NO	28 VDC: Aux NC	115 VAC, 1 PHASE: Main 400Hz	115 VAC, 1 PHASE: Main 60Hz	115 VAC, 1 PHASE: Aux 400Hz	115 VAC, 1 PHASE: Aux 60Hz	115/200 VAC, 3 PHASE 2/: Main 400Hz	115/200 VAC, 3 PHASE 2/: Main 60Hz	115/200 VAC, 3 PHASE 2/: Aux 400Hz	115/200 VAC, 3 PHASE 2/: Aux 60Hz	See Appropriate Notes
RESISTIVE	100	50	—	5	5	50		5		50		—		
INDUCTIVE	20	50	—	5	5	50		5		50		—		
INDUCTIVE														
MOTOR	100	50	—			50				50		—		
LAMP	100	5	—	1	1	5		1		5		—		
TRANSFER, LOAD	50	–				–				50				3/
MECHANICAL LIFE REDUCED CURRENT	400	12.5	—	1.25	1.25	12.5		1.25		12.5		—		
MIN CURRENT	50	5		PER SPEC		5	--	—	—	5	—	—		

ENVIRONMENTAL CHARACTERISTICS

TEMPERATURE RANGE	−70 to +125°C
MAX ALTITUDE RATING	80,000 FT
SHOCK G-LEVEL	50 G
DURATION	11 mS
MAX DURATION CONTACT OPENING	2 mS
VIBRATION - SINUSOIDAL	
G-LEVEL	10 G
FREQUENCY RANGE	10 – 1500 Hz
ACCELERATION	15 G

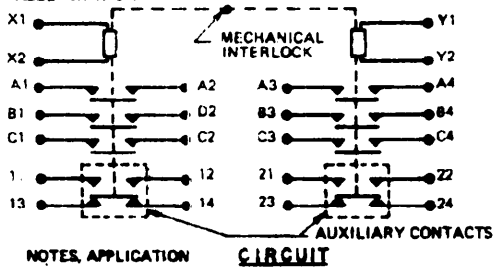

ENVIRONMENTAL CHARACTERISTICS

	Initial	After Life Test
INSULATION RESISTANCE	100 MEGOHMS	50 MEGOHMS
DIELECTRIC STRENGTH (SEA LEVEL)		
COIL TO CASE	1800 V RMS	1125 V RMS
AUX CONTACTS	1250 V RMS	1080 V RMS
ALL OTHER POINTS	1800 V RMS	1350 V RMS

DIELECTRIC STRENGTH (ALTITUDE)	80,000 FT
COIL TO CASE	500 VRMS
AUX CONTACTS	500 VRMS
ALL OTHER POINTS	700 VRMS

MAX CONTACT DROP INITIRAL	150 VOLTS
AFTER LIFE TEST	175 VOLTS
OVERLOAD CURRENT	(NO) 400 AMPS
RUPTURE CURRENT	(NO) 500 AMPS
DUTY RATING	CONTINUOUS
RFI SPEC	MIL-STD-461

(APPLICABLE TO COIL CIRCUITS OF AC OPERATED RELAYS)

NOTES, APPLICATION CIRCUIT

1/ OVER TEMPERATURE RANGE

2/ ABSENCE OF VALUE INDICATES RELAY IS NOT RATED FOR 3 PHASE APPLICATIONS

3/ TRANSFER LOAD INDICATES RELAY SUITABLE FOR TRANSFER BETWEEN UNSYNCHRONIZED AC POWER SUPPLIED AT RATING INDICATED.

4/ WITH NOMINAL COIL VOLTAGES

APPROVED 5 January 1967 REVISED (A) SEE SHTS 1 AND 2

(A) ENTIRE SHT REVISED

P.A. USAF 80 / Other Cust	TITLE: RELAY, 50 AMP, 2-3 PST NO, DOUBLE BREAK, MECHANICAL INTERLOCK (CENTER OFF) LOAD TRANSFER, TYPE I, HERMETICALLY SEALED	MILITARY STANDARD MS27707 (USAF)
PROCUREMENT SPECIFICATION MIL-R-6106	SUPERSEDES:	SHEET 2

DD FORM 1426 672 EDITION OF 1 SEP 57 MAY BE USED.

This standard has been approved by the AFLC (80) Department of the Air Force and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 20260-23T16:48Z
Check the source to verify that this is the current version before use.