THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(s) DESCRIBED HEREIN SHALL CONSIST OF THIS ECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THE ISSUE OF THE ODISS SPECIFIED IN THE SOLICITATION

MIL-S-3950

THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense

Form Approved
OMB No 0704-0188

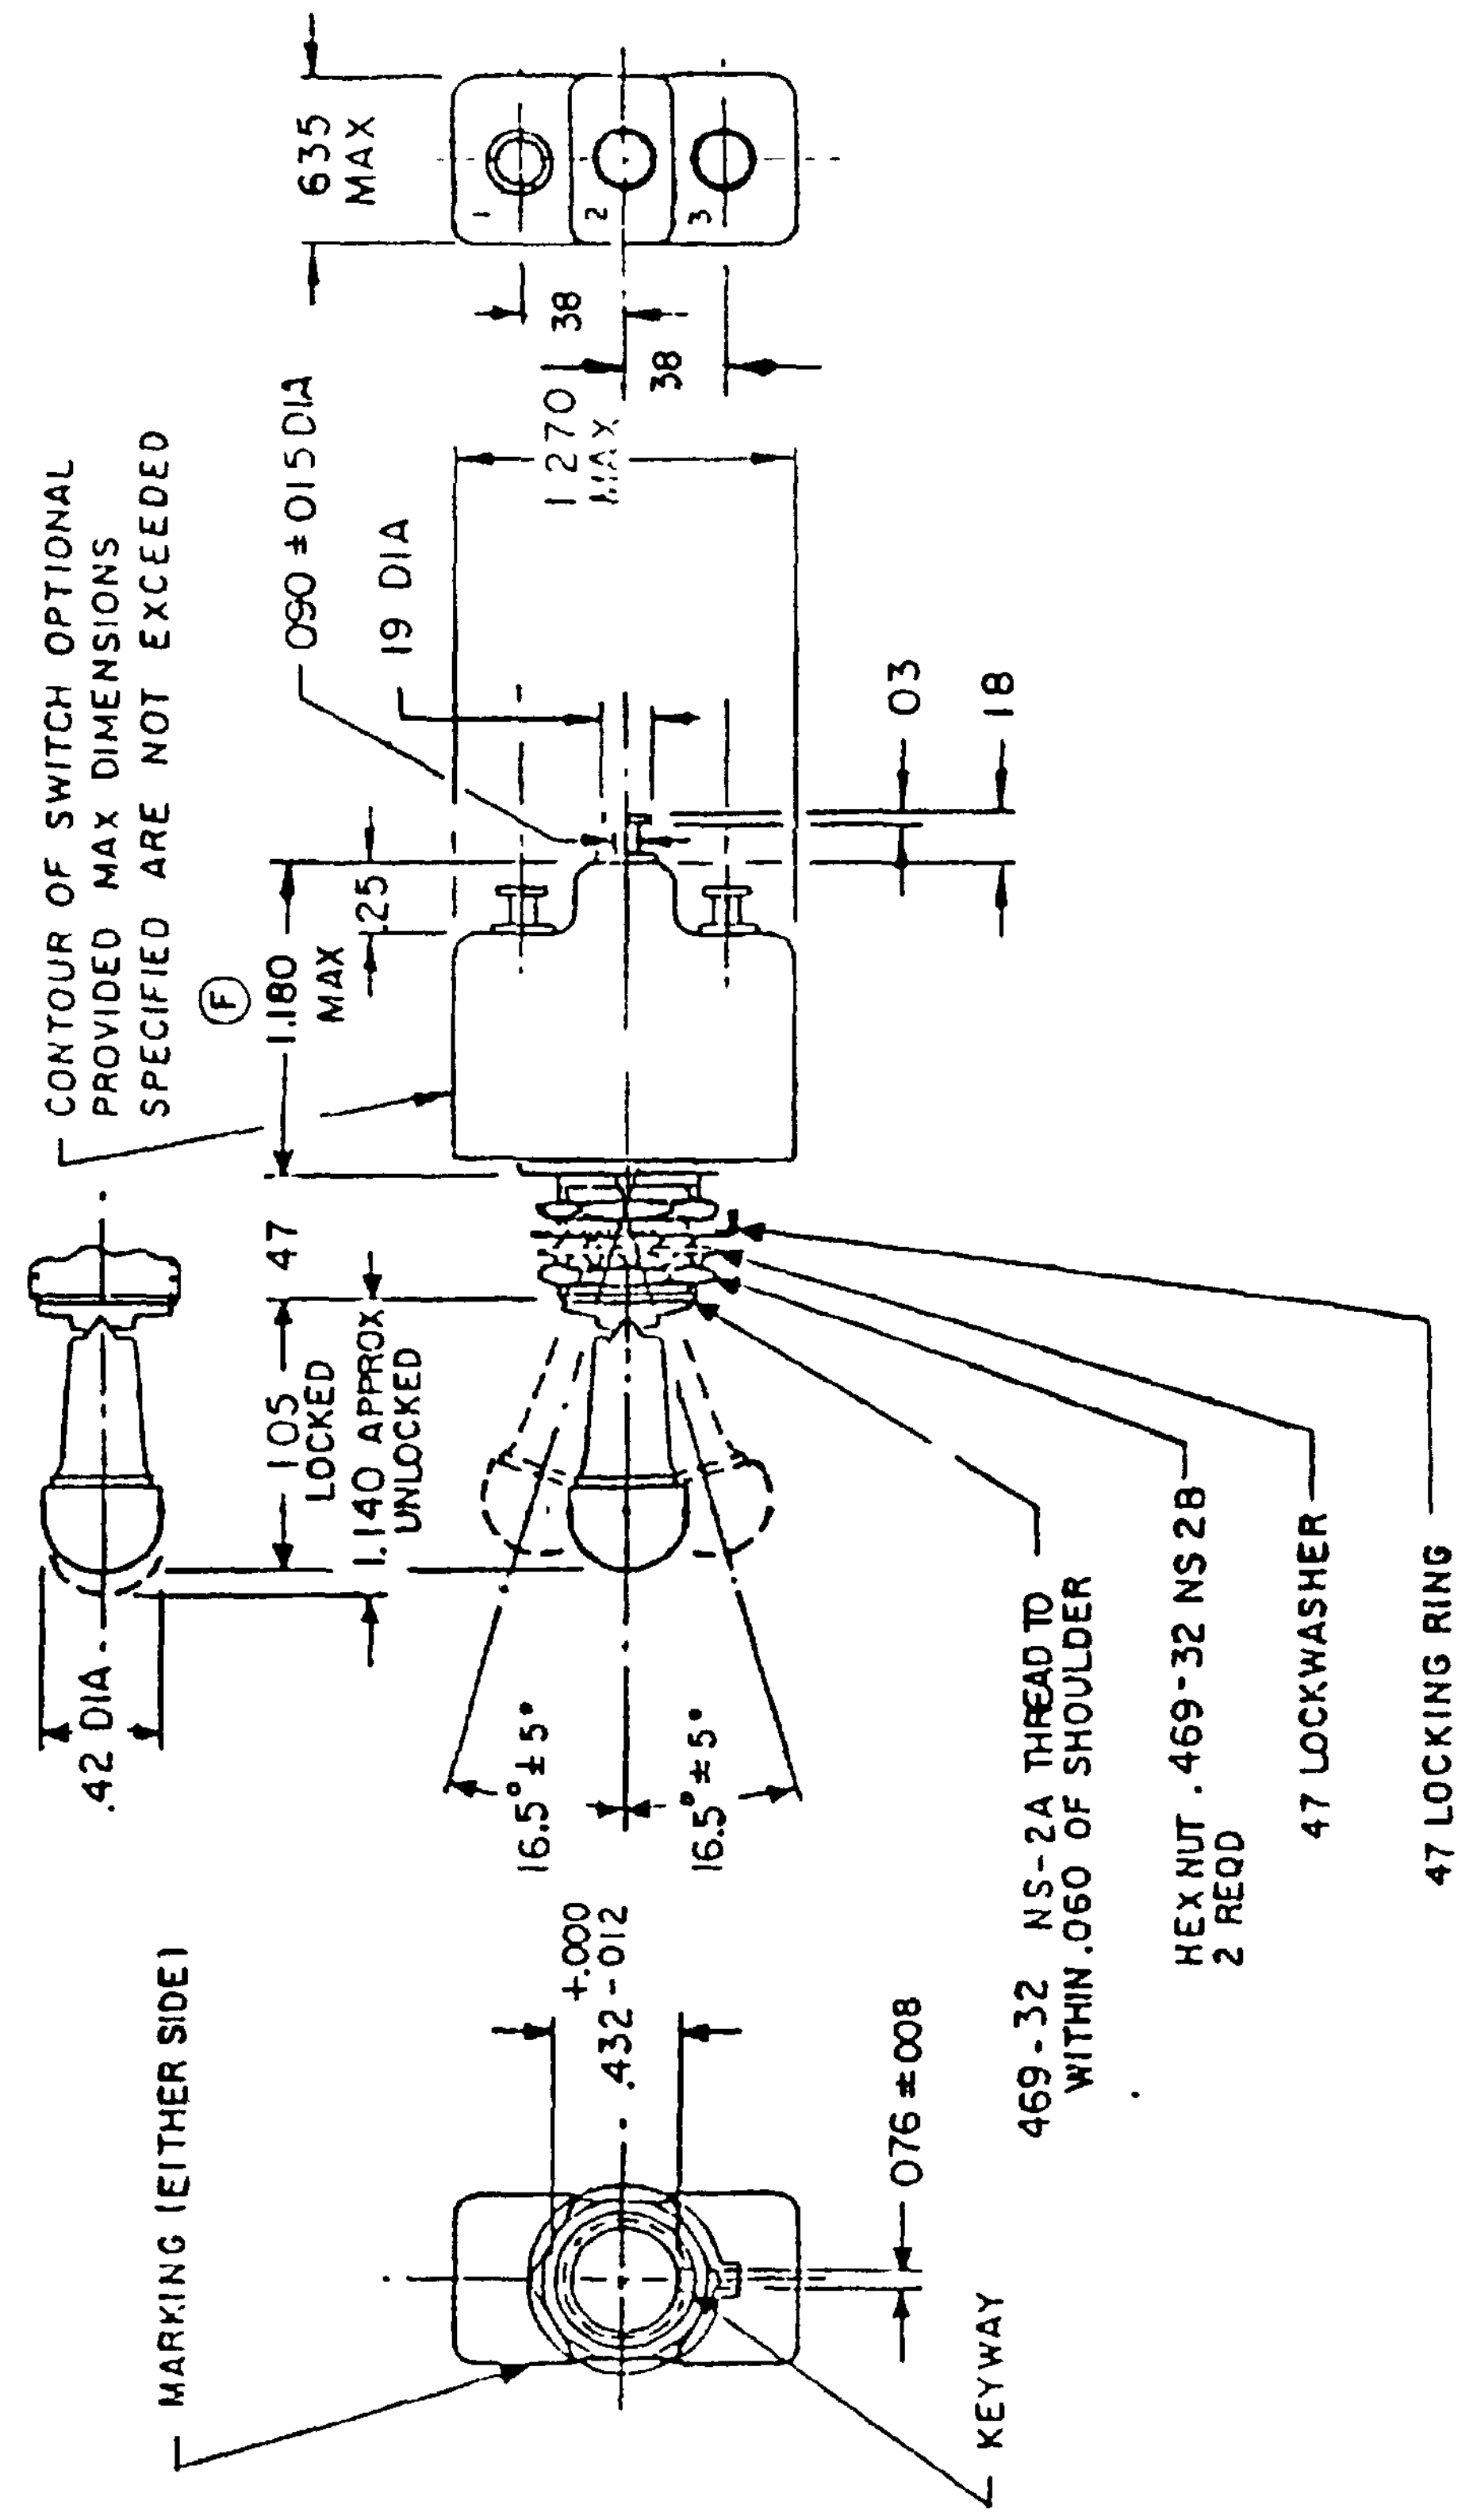

Ⓕ Denotes changes

PREPARING ACTIVITY Air Force-85
CUSTODIANS ARMY ER **NAVY** AS
AIR FORCE **DLA**
Army-AV Navy-EC
REVIEW Air Force-99 DLA-ES
USER Air Force-11
PROJECT NUMBER 5930-1454-08

MILITARY SPECIFICATION SHEET

TITLE SWITCH, TOGGLE, ONE POLE, ENVIRONMENTALLY SEALED, LEVER-LOCK, SOLDER TERMINAL

SPECIFICATION SHEET NUMBER
MS27737F 4 Sep 1991
SUPERSEDING
MS27737E 28 Sep 1987
AMSC N/A **FSC** 5930

DISTRIBUTION STATEMENT A: Approved for public release, distribution is unlimited

Page 1 **of** 4

DD Form 672, MAY 88 Previous editions are obsolete

U S GOVERNMENT PRINTING OFFICE: 1988 240 970/80929

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT DESCRIBED HEREIN SHALL CONSIST OF THE SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION
MIL-S-3950

THIS SPECIFICATION IS APPROVED FOR USE BY
Department of Defense

Form Approved
OMB No 0704-0188

Inches	mm	Inches	mm
.005	0.13	.25	6.4
.008	0.20	.38	9.7
.012	0.30	.42	10.7
.015	0.38	.432	10.97
.020	0.51	.469	11.91
.03	0.8	.47	11.9
.060	1.52	.635	16.13
.076	1.93	1.05	26.7
.090	2.29	1.140	28.96
.18	4.6	1.180	29.97
.19	4.8	1.270	32.27

NOTES
1. Dimensions are inches.
2 Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.020 (0.51 mm) for two place decimals and ±.005 (0.13 mm) for three place decimals.
4. For hardware detail specifications, see appendix of MIL-S-3950.
5. All switches on this standard are designed so that the movement of the switch mechanism is opposite to that of the toggle lever.
6. Maximum weight is 0.11 pound.
7. Locking arrangement· Positive locking shall be accomplished and shall prevent motion of the toggle lever until the locking mechanism is manually released.
8 The force required to release the locking mechanism shall be 3 to 5 pounds.
9. The locking means at the top of the toggle bushing shall be capable of withstanding a torque of 20 inch-pounds applied in both directions immediately following the humidity test.
10 Part number example MS27737-21A (locking combination 'A').
11. In the event of a conflict between the text of this standard and the reference cited herein, the text of this standard shall take precedence.
12. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this standard to the extent specified herein.

PREPARING ACTIVITY Air Force-85
CUSTODIANS **ARMY** - ER **NAVY** - AS
AIR FORCE **DLA**
REVIEW Army-AV Navy-EC
Air Force-99 DLA-ES
USER Air Force-11
PROJECT NUMBER 5930-1454-08

MILITARY SPECIFICATION SHEET
TITLE SWITCH, TOGGLE, ONE POLE, ENVIRONMENTALLY SEALED, LEVER-LOCK, SOLDER TERMINAL

SPECIFICATION SHEET NUMBER
MS27737F
SUPERSEDING
MS27737E 28 Sep 1987
AMSC N/A **FSC** 5930

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

U S GOVERNMENT PRINTING OFFICE : 1988 240-979:80878

THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(s) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION
MIL-S-3950

Form Approved
OMB No 0704-0188

Locking combinations

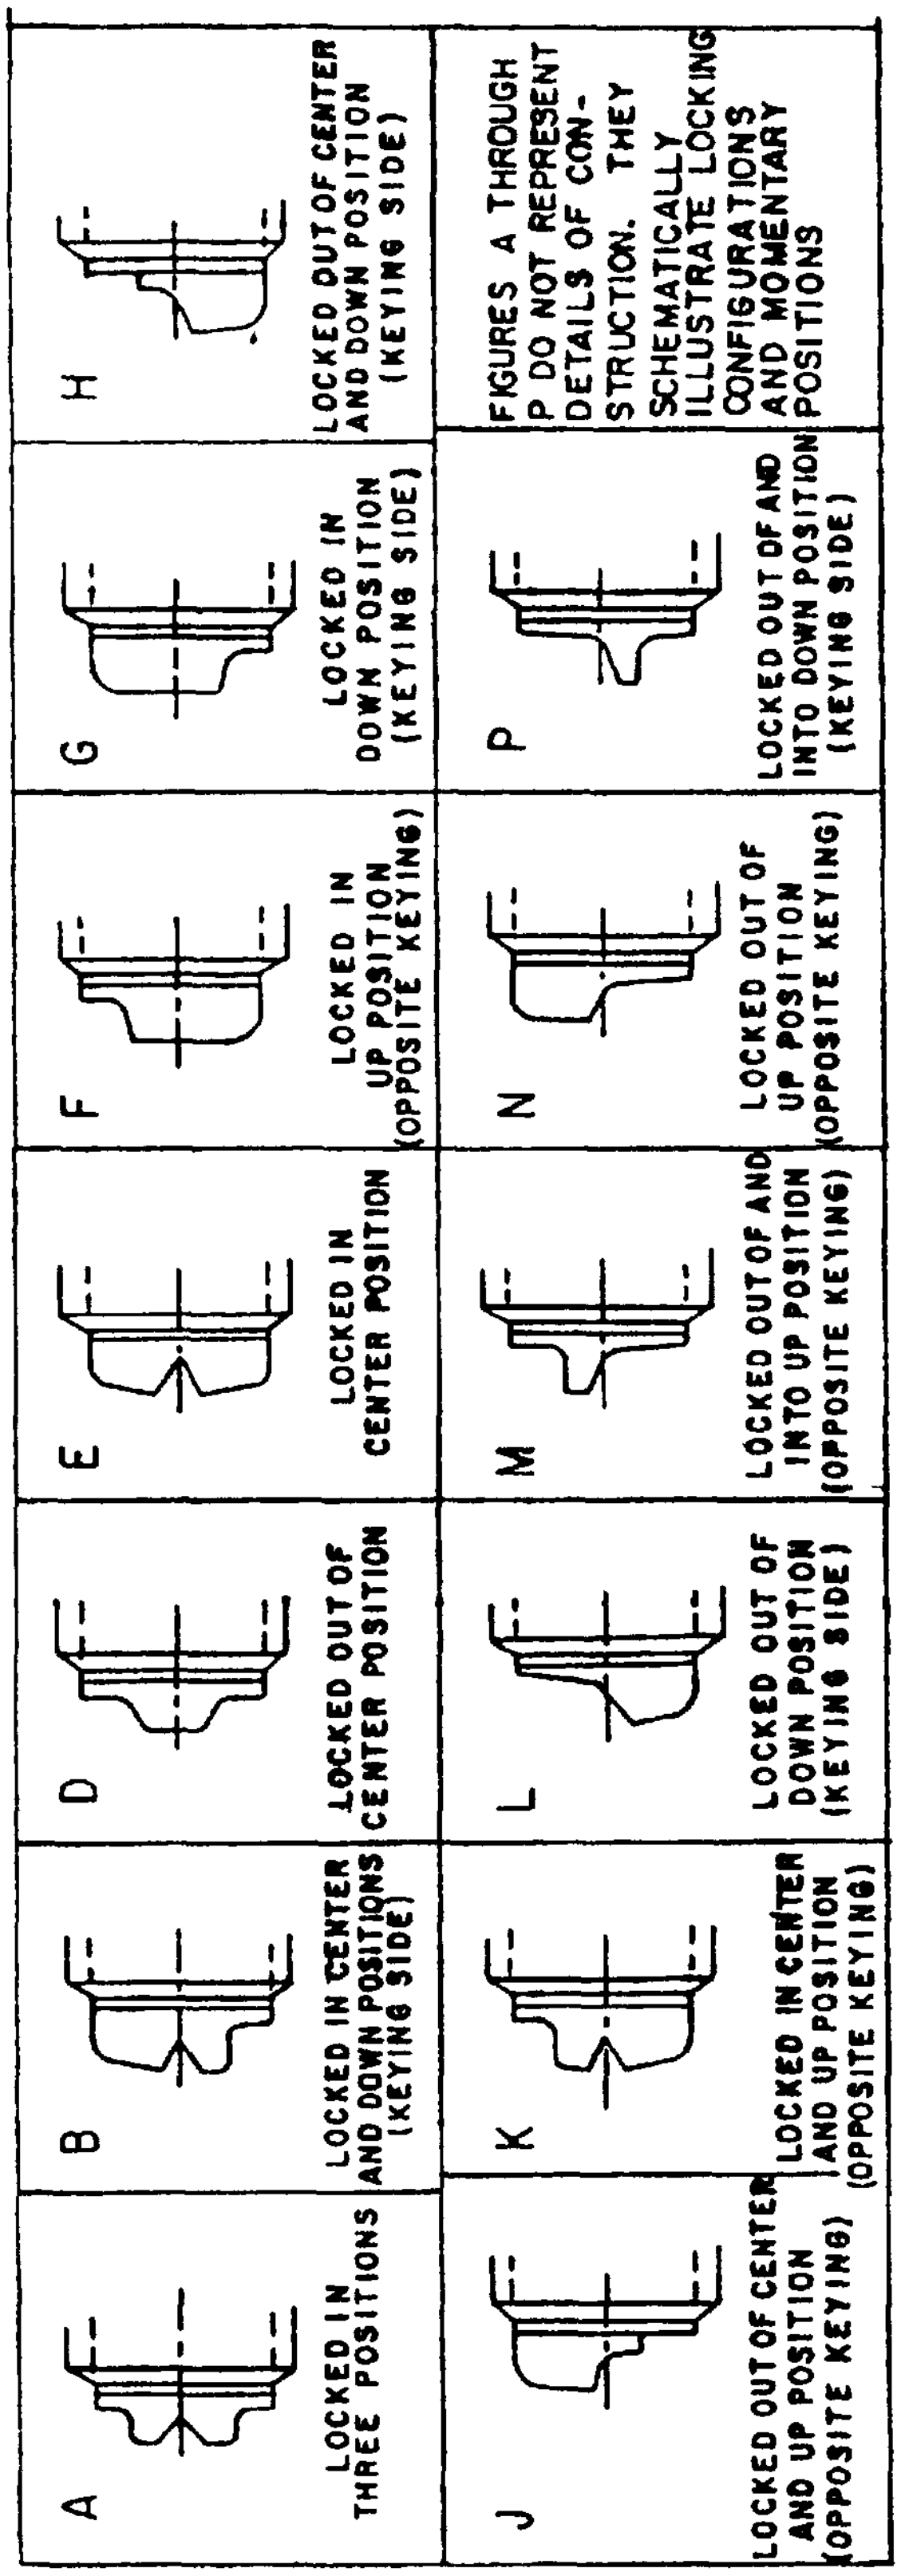

A LOCKED IN THREE POSITIONS

B LOCKED IN CENTER AND DOWN POSITIONS (KEYING SIDE)

D LOCKED OUT OF CENTER POSITION

E LOCKED IN CENTER POSITION

F LOCKED IN UP POSITION (OPPOSITE KEYING)

G LOCKED IN DOWN POSITION (KEYING SIDE)

H LOCKED OUT OF CENTER AND DOWN POSITION (KEYING SIDE)

J LOCKED OUT OF CENTER AND UP POSITION (OPPOSITE KEYING)

K LOCKED IN CENTER AND UP POSITION (OPPOSITE KEYING)

L LOCKED OUT OF DOWN POSITION (KEYING SIDE)

M LOCKED OUT OF AND INTO UP POSITION (OPPOSITE KEYING)

N LOCKED OUT OF UP POSITION (OPPOSITE KEYING)

P LOCKED OUT OF AND INTO DOWN POSITION (KEYING SIDE)

FIGURES A THROUGH P DO NOT REPRESENT DETAILS OF CONSTRUCTION. THEY SCHEMATICALLY ILLUSTRATE LOCKING CONFIGURATIONS AND MOMENTARY POSITIONS

PREPARING ACTIVITY Air Force-85
CUSTODIANS ARMY ER **NAVY** AS
AIR FORCE **DLA**
REVIEW Army-AV Navy-EC
Air Force-99 DLA-ES
USER Air Force-11
PROJECT NUMBER 5930-1454-08

MILITARY SPECIFICATION SHEET
TITLE SWITCH, TOGGLE, ONE POLE,
ENVIRONMENTALLY SEALED,
LEVER-LOCK, SOLDER TERMINAL

SPECIFICATION SHEET NUMBER
MS27737F
SUPERSEDING
MS27737E 28 Sep 1987
AMSC N/A **FSC** 5930

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited

DD Form 672, MAY 88 PREVIOUS EDITION MAY BE USED

U.S. GOVERNMENT PRINTING OFFICE: 1988 740 979/80970

THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-S-3950

Form Approved
OMB No 0704-0188

Detail requirements:

MS part number	Available locking combinations	Circuit with toggle lever in			Current capacity (amperes) 28 volts dc			Current capacity (amperes) 115 volts, 60 and 400 hertz ac		
		Keying side	Center	Opposite keying side	Lamp-load circuit	Resistive circuit	Inductive circuit	Lamp-load circuit	Resistive circuit	Inductive circuit
MS27737-21	All	1-2 On	Off	2-3 On	5	20	15	3	15	10
MS27737-22	D, F, G	Off	None	2-3 On						
MS27737-23	D, F, G	1-2 On	None	2-3 On						
MS27737-24	E, F, K, M	None	Off	2-3 On						
MS27737-25	F	None	Mom. off	2-3 On	4	15	10	2	15	7
MS27737-26	F	1-2 Mom. on	None	2-3 On						
MS27737-27	E, L, N	1-2 Mom. on	Off	2-3 Mom. on						
MS27737-28	E	1-2 Mom on	Off	None						
MS27737-29	F	Mom. off	None	2-3 On						
MS27737-30	F	1-2 Mom. on	None	Off						
MS27737-31	E, F, K, L, M, N	1-2 Mom. on	Off	2-3 On						
MS27737-32	E	None	On 1-2	2-3 Mom. on						
MS27737-33	E, F, K, M	None	On 1-2	2-3 On	5	20	15	3	15	10

PREPARING ACTIVITY Air Force-85
CUSTODIANS **ARMY** ER **NAVY**-AS
AIR FORCE **DLA**
Army-AV Navy-EC
REVIEW Air Force-99 DLA-ES
USER Air Force-11
PROJECT NUMBER 5930-1454-08

MILITARY SPECIFICATION SHEET

TITLE
SWITCH, TOGGLE, ONE POLE,
ENVIRONMENTALLY SEALED,
LEVER-LOCK, SOLDER TERMINAL

SPECIFICATION SHEET NUMBER
MS27737F
SUPERSEDING
MS27737E 28 Sep 1987
AMSC N/A **FSC** 5930

DISTRIBUTION STATEMENT A· Approved for public release, distribution is unlimited

DD Form 672 MAY 88

Previous editions are obsolete

U S GOVERNMENT PRINTING OFFICE: 1988 740 979/60878