INCH-POUND

MS3475G
w/AMENDMENT 2
3 February 2021
SUPERSEDING
MS3475G
w/AMENDMENT 1
27 October 2015


DETAIL SPECIFICATION SHEET

# CONNECTORS, PLUG, ELECTRICAL, RFI SHIELDED, SERIES 2, CRIMP TYPE, BAYONET COUPLING, CLASSES A, D, L, T, W AND K

Reactivated after 1 March 2007, and may be used for new and existing designs and acquisitions.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-26482.

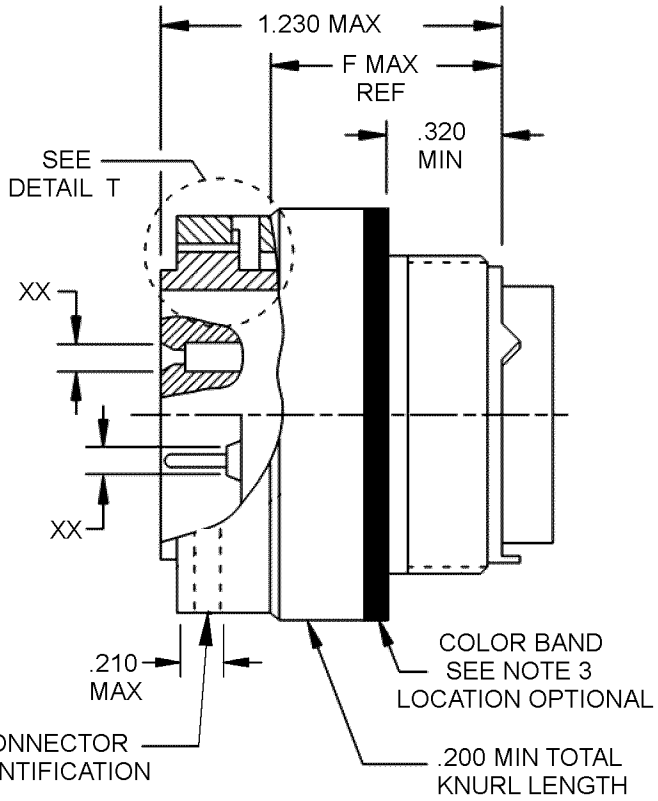


NOTE: For “XX”, see note 5 and table I for contact cavities requiring reduced dimensions.

FIGURE 1. Plug, dimensions.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:06Z
Check the source to verify that this is the current version before use.


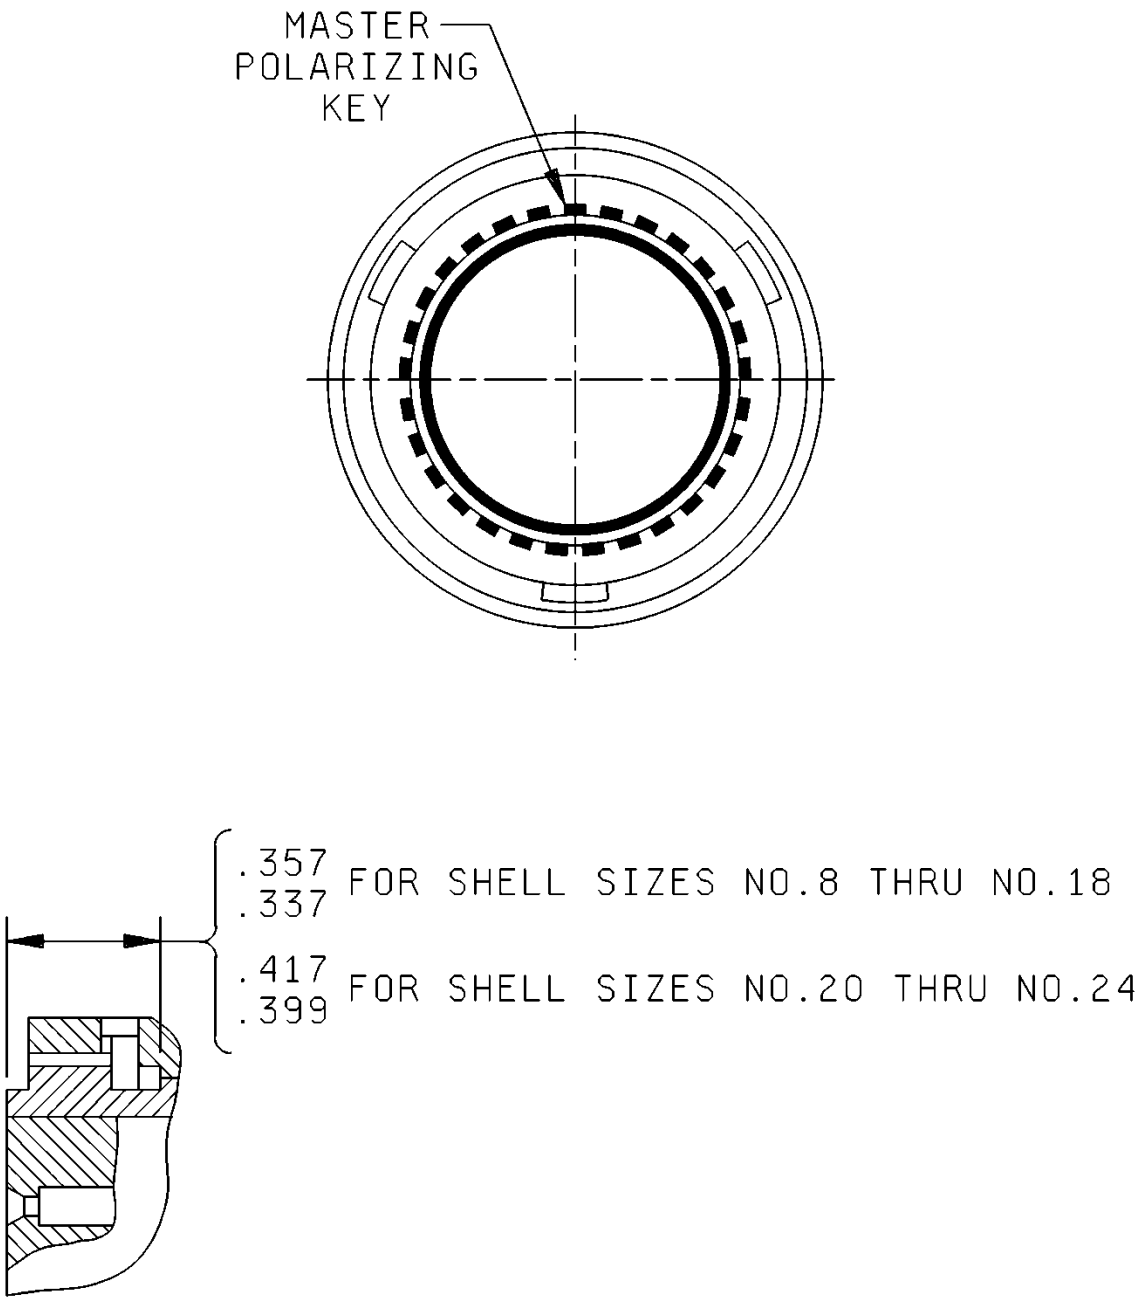



FIGURE 1. Plug, dimensions - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:06Z
Check the source to verify that this is the current version before use.

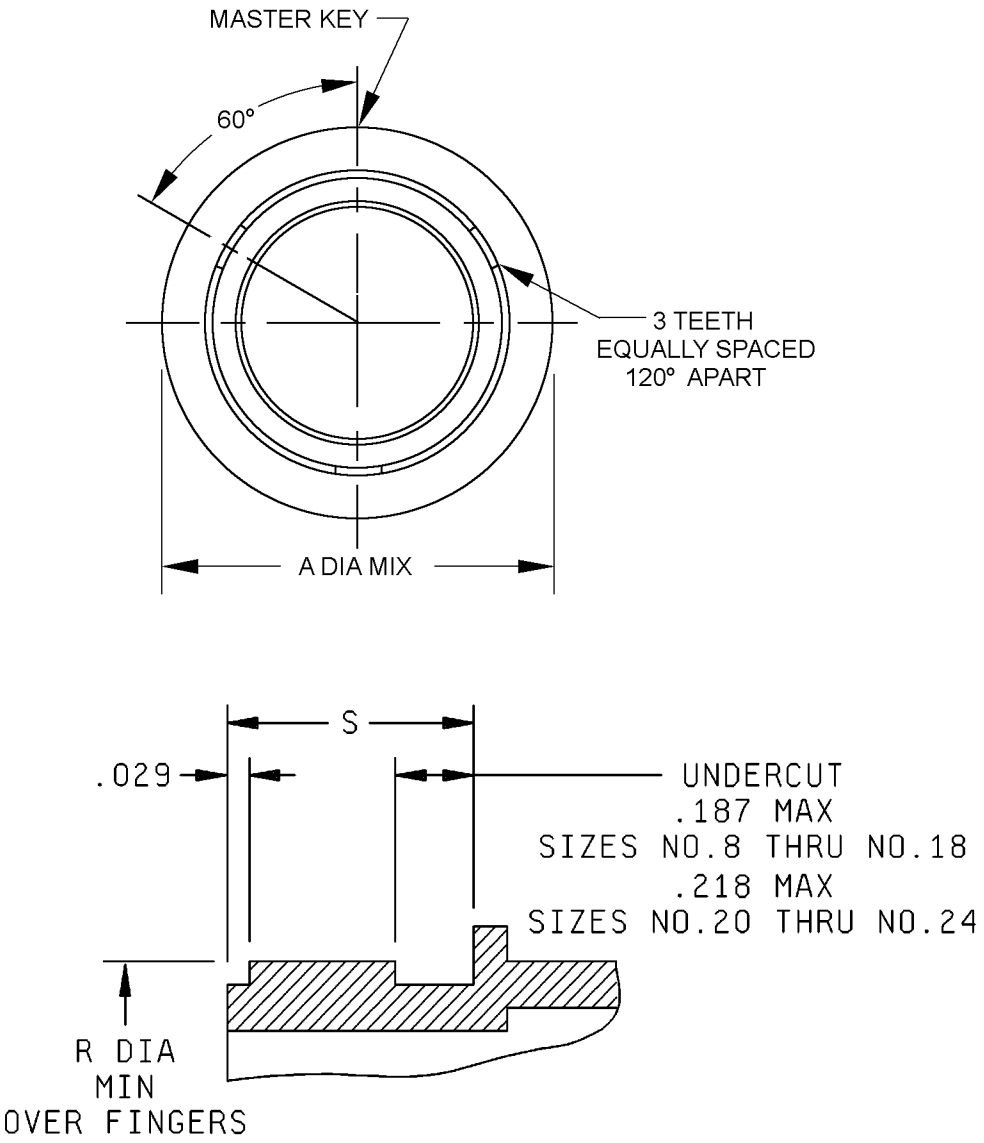


DETAIL T
(COUPLING RING REMOVED
FOR CLARITY)

FIGURE 1. Plug, dimensions - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:06Z
Check the source to verify that this is the current version before use.

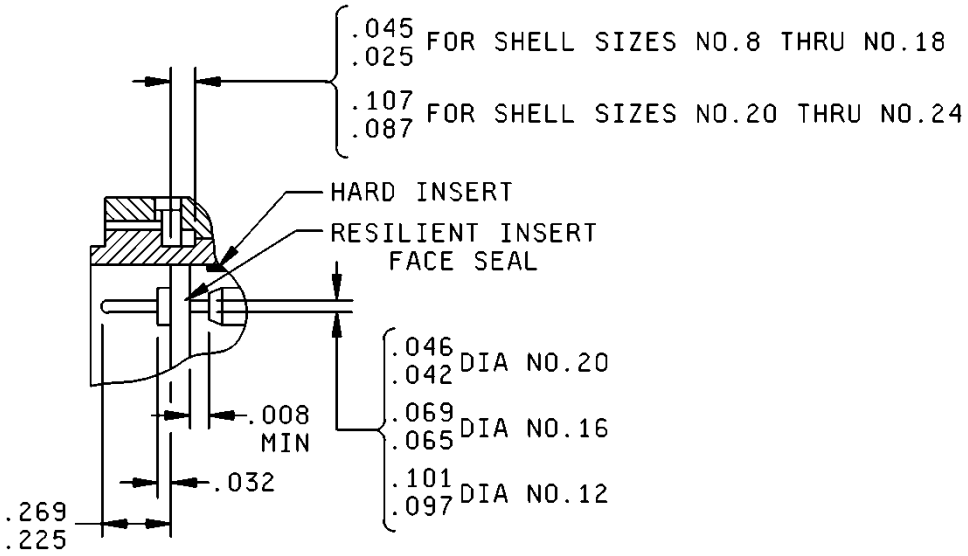



FIGURE 1. Plug, dimensions - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:06Z
Check the source to verify that this is the current version before use.

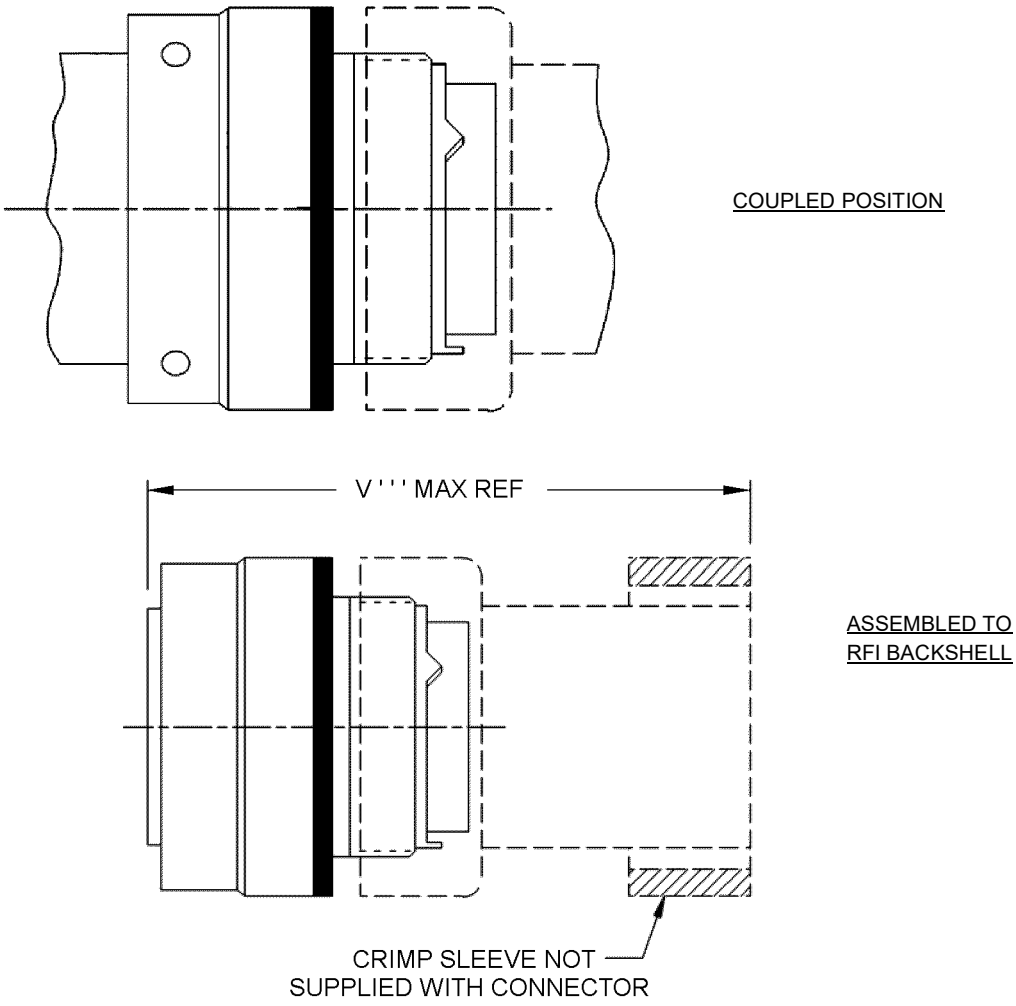



FIGURE 1. Plug, dimensions - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:06Z
Check the source to verify that this is the current version before use.

| Shell size | A | F | R | S | V''' | Max weight lbs (grams) 1/ | |
|---|---|---|---|---|---|---|---|
| | | | | | | Pin | Socket |
| 8 | .782 (19.86) | .887 (22.53) | .369 (9.37) | .363 (9.22) .343 (8.71) | 2.334 (59.28) | .0204 (9.26) | .0216 (9.81) |
| 10 | .926 (23.52) | .887 (22.53) | .497 (12.62) | | 2.334 (59.28) | .0406 (18.43) | .0421 (19.11) |
| 12 | 1.043 (26.49) | .887 (22.53) | .614 (15.60) | | 2.334 (59.28) | .0505 (22.93) | .0536 (24.33) |
| 14 | 1.183 (30.05) | .887 (22.53) | .739 (18.77) | | 2.334 (59.28) | .0639 (29.01) | .0692 (31.42) |
| 16 | 1.305 (33.15) | .887 (22.53) | .864 (21.95) | | 2.334 (59.28) | .0788 (35.77) | .0880 (39.95) |
| 18 | 1.391 (35.33) | .887 (22.53) | .969 (24.61) | | 2.334 (59.28) | .0864 (39.22) | .0957 (43.44) |
| 20 | 1.531 (38.89) | .825 (20.96) | 1.094 (27.79) | .425 (10.80) .405 (10.29) | 2.334 (59.28) | .1016 (46.12) | .1114 (50.57) |
| 22 | 1.656 (42.06) | .825 (20.96) | 1.219 (30.96) | | 2.334 (59.28) | .1241 (56.34) | .1363 (61.88) |
| 24 | 1.777 (45.14) | .825 (20.96) | 1.344 (34.14) | | 2.334 (59.28) | .1400 (63.56) | .1916 (86.98) |

1/ Less contacts and accessories. Maximum weights do not apply to class S.

| Inches | mm | Inches | mm | Inches | mm | Inches | mm |
|---|---|---|---|---|---|---|---|
| .008 | 0.20 | .065 | 1.66 | .187 | 4.75 | .320 | 8.13 |
| .025 | 0.64 | .069 | 1.75 | .200 | 5.08 | .337 | 8.56 |
| .029 | 0.74 | .087 | 2.21 | .218 | 5.54 | .357 | 9.07 |
| .032 | 0.81 | .097 | 2.46 | .225 | 5.72 | .399 | 10.13 |
| .042 | 1.07 | .101 | 2.57 | .269 | 6.83 | .419 | 10.64 |
| .045 | 1.14 | .107 | 2.72 | .200 | 5.08 | 1.230 | 31.24 |
| .046 | 1.17 | | | | | | |

NOTES:

1. Dimensions are in inches. Metric equivalents are given for information only and are in parentheses.
2. Unless otherwise specified, tolerances are ± .005 (0.13 mm) for 3 place decimals, ± .01 (0.3 mm) for 2 place decimals, and ± 1° for all angles.
3. Color bands: .070 ± .031 (1.78 ± 0.79 mm) wide, color blue.
4. Connector assembly must be used with a backshell. Backshells must be procured separately. See SAE-AS85049 for applicable backshells.
5. Insert arrangements requiring reduced diameters for raised seal barrier on outer row of contact cavities as indicated.

FIGURE 1. Plug, dimensions - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:06Z
Check the source to verify that this is the current version before use.

TABLE I. Contact cavities requiring reduced diameters (XX) for pins and sockets in outer row of contact cavities. 1/

| Shell size | Insert arrangement | Contact cavities |
|---|---|---|
| 8 | -33 & -98 | A, B, C |
| 12 | -10 | C, G |
| 14 | -12 | A, B, C, D, E, F, G, H |
| 14 | -18 | A, C, E, G, J, L |
| 14 | -19 | B, D, F, H, K, M |
| 16 | -26 | A, B, C, D, E, F, G, H, J, K, L, M, N, P, R |
| 18 | -32 | A, B, C, D, E, F, G, H, J, K, L, M, N, P, R, S, T |
| 22 | -41 | A, B, C, D, E, F, G, H, J, K, L, M, N, P, R, S, T, U, V, W, X, Y |

1/ The reduced diameter “XX” refers to the diameters of the raised seal barriers (pin barrier rings) or lead-in chamfers (socket entry holes) to ensure proper sealing of pin and socket after mating. See MIL-DTL-26482, connector intermateability control dimensions figure (series 1 and series 2) for reduced diameter “XX” for contact size 20 only.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

Connector mating: This connector mates with MS3470, MS3471, MS3472, MS3474, MS3477 and MS3479.

Connectors will mate with MS3115 (dummy stowage receptacle) and the following series 1 receptacles provided both mating connectors contain a full compliment of power contacts: MS3110, MS3112, MS3113, MS3114, MS3119, MS3120, MS3122, MS3124, MS3127 and MS3128.

Intermateability and rear accessory interchangeability dimensions are in accordance with MIL-DTL-26482.

Class E is cancelled and replaced by class L. Class Z is cancelled and superseded by class K.

This specification sheet supersedes MIL-C-83723/42 and MIL-C-83723/43.

For insert arrangement, see MIL-STD-1669.


Insert arrangements requiring reduced diameters for raised seal barriers or lead-in chamfers on outer row of contact cavities as indicated, see table I.

Connector identification marking shall be in accordance with MIL-DTL-26482. Example: MS3475L----, minimum height does not apply to shell sizes 8, 10 and 12.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:06Z
Check the source to verify that this is the current version before use.

Part or Identifying Number (PIN) example:

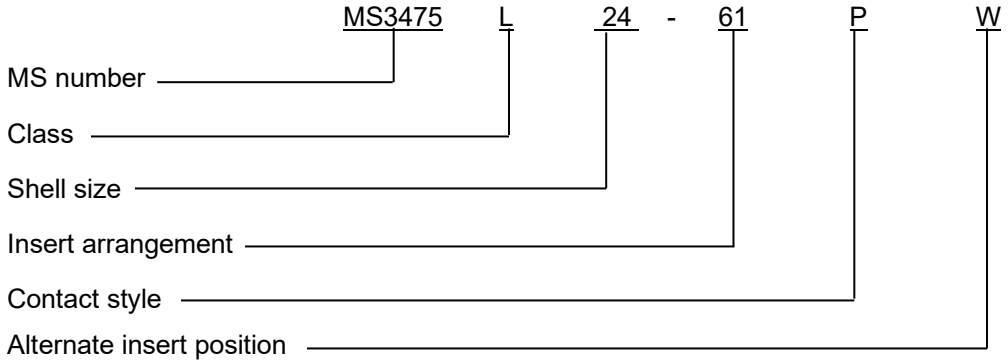


Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-26482, this document references the following:

MS3110
MS3112
MS3113
MS3114
MS3115
MS3119
MS3120
MS3122
MS3124
MS3127
MS3128
MS3470
MS3471
MS3472
MS3474
MS3477
MS3479
MIL-STD-1669
SAE-AS85049



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:06Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – AS
Air Force – 85
DLA – CC

Review activities:
Army – AR, AV
Navy – EC, SH

Preparing activity:
DLA – CC

(Project 5935-2020-110)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:06Z
Check the source to verify that this is the current version before use.