
NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

FED. SUP CLASS 5305

NOTE: RAISED HEAD MARKINGS PREFERRED. STAMPING ACCEPTABLE.

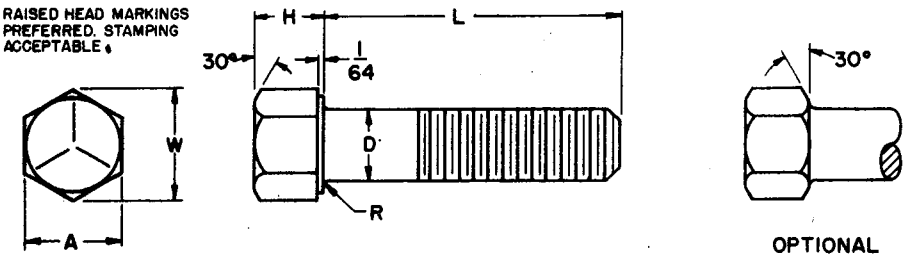

OPTIONAL

NOMINAL SIZE			1/4	5/16	3/8	7/16	1/2	9/16	5/8
THREADS PER INCH			20UNC	18UNC	16UNC	14UNC	13UNC	12UNC	11UNC
BODY DIAMETER	D	Max	.2500	.3125	.3750	.4375	.5000	.5625	.6250
		Min	.2450	.3065	.3690	.4305	.4930	.5545	.6170
WIDTH ACROSS FLATS	A	Max	.4375	.5000	.5625	.6250	.7500	.8125	.9375
		Min	.4280	.4890	.5510	.6120	.7360	.7980	.9220
WIDTH ACROSS CORNERS	W	Max	.5050	.5770	.6500	.7220	.8660	.9380	1.0830
		Min	.4880	.5570	.6280	.6980	.8400	.9100	1.0510
HEAD HEIGHT	H	Max	.1630	.2110	.2430	.2910	.3230	.3710	.4030
		Min	.1500	.1950	.2260	.2720	.3020	.3480	.3780
RADIUS	R	Max	.023	.023	.023	.023	.023	.041	.041
		Min	.009	.009	.009	.009	.009	.021	.021

LENGTH	L	Tolerance	Dash Number	Dash Number	Dash Number	Dash Number	Dash Number	Dash Number	Dash Number
3/8			1	27	53				
7/16			2	28	54	79			
1/2			3	29	55	80	104		
9/16		+0	4	30	56	81	105	130	
5/8		-1/32	5	31	57	82	106	131	155
3/4			6	32	58	83	107	132	156
7/8			7	33	59	84	108	133	157
1			8	34	60	85	109	134	158
1-1/8			9	35	61	86	110	135	159
1-1/4			10	36	62	87	111	136	160
1-3/8		+0	11	37	63	88	112	137	161
1-1/2		-1/16	12	38	64	89	113	138	162
1-3/4			13	39	65	90	114	139	163
2			14	40	66	91	115	140	164
2-1/4			15	41	67	92	116	141	165
2-1/2			16	42	68	93	117	142	166
2-3/4			17	43	69	94	118	143	167
3			18	44	70	95	119	144	168
3-1/4			19	45	71	96	120	145	169
3-1/2		+0	20	46	72	97	121	146	170
3-3/4		-3/32	21	47	73	98	122	147	171
4			22	48	74	99	123	148	172
4-1/4			23	49	75	100	124	149	173
4-1/2			24	50	76	101	125	150	174
4-3/4			25	51	77	102	126	151	175
5			26	52	78	103	127	152	176
5-1/2							128	153	177
6							129	154	178

Ⓐ CANCELLED
SEE SHEET 2

MATERIAL: Medium Carbon Steel, Grade 5 of procurement specification. Minimum tensile strength: 120,000 PSI for diameters through 3/4"; 110,000 PSI for 7/8" and 1" diameters; 105,000 PSI for diameters 1-1/8" through 1-1/2"; 90,000 PSI for diameters over 1-1/2".

FINISH: Cadmium or Zinc plated, Specification QQ-P-416, Type II, Class C, or Specification [illegible], Type II, Class 3.

THREADS: The threads shall be in accordance with Screw-Thread Standards for Federal Services Handbook H-28.

MINIMUM THREAD LENGTH: Shall be twice the diameter plus 1/4" for lengths up to and including 6". The tolerance shall be plus 3/16" or 2-1/2 threads, whichever is greater. On products that are too short for minimum thread lengths, the distance from the bearing surface of the head to the first complete thread shall not exceed the length of 2-1/2 threads, for sizes up to and including 1" and 3-1/2 threads for sizes larger than 1".

NOTES: (1) Referenced documents of issue in effect on date of invitation for bids shall apply.
(2) In case of conflict with any referenced document, this standard will govern.
(3) The MS part number consists of the MS sheet number, plus the dash number. Example: MS 35297-1.
(4) All dimensions in inches.

Ⓐ For changes see sheets 1, 2 and 3.

APPROVED MARCH 4, 1954 REVISED Ⓐ 26 APRIL 63

P.E. NC	TITLE	MILITARY STANDARD
Other Cust SHIPS ASD	SCREW, CAP, HEXAGON HEAD (FINISHED HEXAGON BOLT), MEDIUM CARBON STEEL, CADMIUM OR ZINC FINISH, UNC-2A	MS 35297
PROCUREMENT SPECIFICATION FF-S-85	SUPERSEDES:	SHEET 1 OF 3

DD FORM 673-1 (Continued) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:14Z
Check the source to verify that this is the current version before use.

FED. SUP. CLASS
5305

NOMINAL SIZE			3/4	7/8	1	1-1/8	1-1/4	1-3/8	1-1/2
THREADS PER INCH			10UNC	9UNC	8UNC	7UNC	7UNC	6UNC	6UNC
BODY DIAMETER	D	Max	.7500	.8750	1.0000	1.1250	1.2500	1.3750	1.5000
		Min	.7410	.8660	0.9900	1.1140	1.2390	1.3630	1.4880
WIDTH ACROSS FLATS	A	Max	1.1250	1.3125	1.5000	1.6875	1.8750	2.0625	2.2500
		Min	1.1000	1.2850	1.4690	1.6310	1.8120	1.9940	2.1750
WIDTH ACROSS CORNERS	W	Max	1.2990	1.5160	1.7320	1.9490	2.1650	2.3820	2.5980
		Min	1.2540	1.4650	1.6750	1.8590	2.0660	2.2730	2.4800
HEAD HEIGHT	H	Max	.4830	.5630	.6270	.7180	.8130	.8780	.9740
		Min	.4550	.5310	.5910	.6580	.7490	.8100	.9020
RADIUS	R	Max	.041	.062	.093	.093	.093	.093	.093
		Min	.021	.041	.062	.062	.062	.062	.062

LENGTH L	TOLERANCE Size 3/4 and under	TOLERANCE Size 7/8 and over	Dash Number	Dash Number	Dash Number	Dash Number	Dash Number	Dash Number	Dash Number
3/4, 7/8, 1	+0 -1/32	+0 -1/16	179, 180, 181, 182, 183, 184	202, 203, 204, 205, 206, 207	224, 225, 226, 227, 228	Ⓐ CANCELLED SEE NOTE			
1-1/8, 1-1/4, 1-3/8, 1-1/2, 1-3/4, 2	+0 -1/16	+0 -1/8	185, 186, 187, 188, 189, 190	207, 208, 209, 210, 211, 212	228, 229, 230, 231, 232, 233	248, 249, 250, 251, 252, 253	267, 268, 269, 270, 271, 272	285, 286, 287, 288, 289, 290	302, 303, 304, 305, 306, 307
2-1/4, 2-1/2, 2-3/4, 3, 3-1/4, 3-1/2, 3-3/4, 4, 4-1/4, 4-1/2, 4-3/4, 5, 5-1/2, 6	+0 -3/32	+0 -3/16	191, 192, 193, 194, 195, 196, 197, 198, 199, 200, 201	213, 214, 215, 216, 217, 218, 219, 220, 221, 222, 223	234, 235, 236, 237, 238, 239, 240, 241, 242, 243, 244	254, 255, 256, 257, 258, 259, 260, 261, 262, 263, 264	273, 274, 275, 276, 277, 278, 279, 280, 281, 282, 283	291, 292, 293, 294, 295, 296, 297, 298, 299, 300, 301	308, 309, 310, 311, 312, 313, 314, 315, 316, 317, 318

NOTE: For illustration, material, finish and other pertinent data, see sheet 1.

Ⓐ CANCELLED AFTER 26 April 1963. USE MS90725. INTERCHANGEABILITY RELATIONSHIP - MS90725 can replace the cancelled screws of the same size. The cancelled MS35297 cannot always replace MS90725 and should be used until existing stock is depleted. Then use only the superseding MS screws of the same size for design and replacement.

APPROVED MARCH 4, 1954 REVISED Ⓐ FOR CHANGES SEE SHEETS 1, 2 AND 3

NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A.	MC
Other Cust	SHIPS ASD

TITLE: SCREW, CAP, HEXAGON HEAD (FINISHED HEXAGON BOLT), MEDIUM CARBON STEEL, CADMIUM OR ZINC FINISH, UNC-2A

MILITARY STANDARD
MS 35297
SHEET 2 OF

PROCUREMENT SPECIFICATION: FF-S-85

SUPERSEDES:

DD FORM 1 SEP 67 672-1 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-03-23T17:14Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5305

NOMINAL SIZE			1-3/4	2	2-1/4	2-1/2			
THREADS PER INCH			5UNC	4-1/2UNC	4-1/2UNC	4UNC			
BODY DIAMETER	D	Max	1.7500	2.0000	2.2500	2.5000			
		Min	1.7380	1.9880	2.2380	2.4880			
WIDTH ACROSS FLATS	A	Max	2.6250	3.0000	3.3750	3.7500			
		Min	2.5380	2.9000	3.2620	3.6250			
WIDTH ACROSS CORNERS	W	Max	3.0310	3.4640	3.8970	4.3300			
		Min	2.8930	3.3060	3.7190	4.1330			
HEAD HEIGHT	H	Max	1.1340	1.2630	1.4230	1.5830			
		Min	1.0540	1.1750	1.3270	1.4790			
RADIUS	R	Max	.093	.093	.093	.093			
		Min	.062	.062	.062	.062			
LENGTH	L	Tolerance	Dash Number	Dash Number	Dash Number	Dash Number	Dash Number	Dash Number	Dash Number
1-3/4		+0 -1/8	319		Ⓐ CANCELLED SEE SHEET 2				
2			320						
2-1/4			321	335					
2-1/2			322	336					
2-3/4			323	337	349	361			
3			324	338	350	362			
3-1/4			325	339	351	363			
3-1/2		+0	326	340	352	364			
3-3/4		-3/16	327	341	353	365			
4			328	342	354	366			
4-1/4			329	343	355	367			
4-1/2			330	344	356	368			
4-3/4			331	345	357	369			
5			332	346	358	370			
5-1/2			333	347	359	371			
6			334	348	360	372			

NOTE: For illustration, material, finish and other pertinent data, see sheet 1.

APPROVED MARCH 4, 1954 REVISED Ⓐ FOR CHANGES SEE SHEETS 1,2 AND 3

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A.	WC	TITLE	MILITARY STANDARD
Other Cust	SHIPS ASD	SCREW, CAP, HEXAGON HEAD (FINISHED HEXAGON BOLT), MEDIUM CARBON STEEL, CADMIUM OR ZINC FINISH, UNC-2A	MS 35297
PROCUREMENT SPECIFICATION FF-S-85		SUPERSEDES:	SHEET 3 OF

DD FORM 1 SEP 67 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-0-23 17:14Z
Check the source to verify that this is the current version before use.