INCH-POUND

MS35824E
w/AMENDMENT 1
8 December 2025
SUPERSEDING
MS35824E
30 JUNE 2010

DETAIL SPECIFICATION SHEET

# HINGE, CONTINUOUS (PIANO) .050 THICKNESS, .187 DIA.

Inactive for new design after 22 January 1976.

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and procurement specification MIL-DTL-9850.

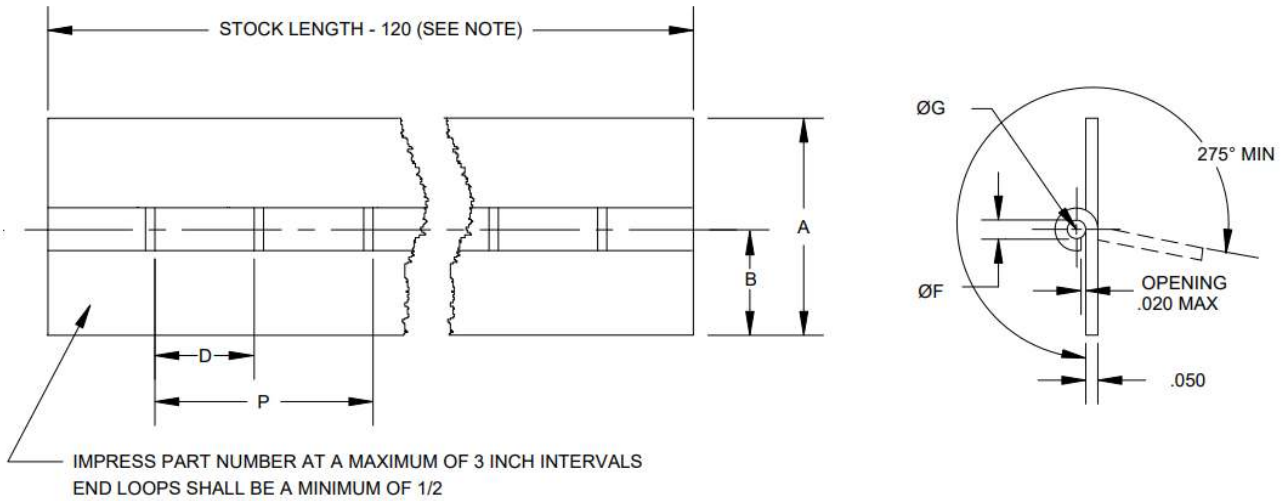



FIGURE I. Hinge.

TABLE I. Dash numbers and dimensions.

| DASH NO. | WIDTH | | STOCK LENGTH L ±0.03 | KNUCKLE LENGTH 1/ D | | PITCH 2/ P | | KNUCKLE ØF | | PIN ØG | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | A REF | B ±0.031 | | | | | | | | | |
| 1 | 1.062 | 0.531 | 120 SEE NOTE 2 | 0.998 | +0.000 -0.015 | 2.000 | +0.015 -0.003 | 0.190 | +0.007 -0.001 | 0.187 | +0.000 -0.002 |
| 2 | 1.500 | 0.750 | | | | | | | | | |
| 3 | 2.000 | 1.000 | | | | | | | | | |
| 4 | 2.500 | 1.250 | | | | | | | | | |
| 5 | 1.062 | 0.531 | | 1.998 | +0.000 -0.015 | 4.000 | +0.015 -0.003 | | | | |
| 6 | 1.500 | 0.750 | | | | | | | | | |
| 7 | 2.000 | 1.000 | | | | | | | | | |
| 8 | 2.500 | 1.250 | | | | | | | | | |

1/ See requirement 3.
2/ See requirement 4.

AMSC N/A
FSC 5340

DISTRIBUTION STATEMENT A: Approved for public release; Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:29Z
Check the source to verify that this is the current version before use.

Requirements:

1. Material - A. Aluminum-leaf-temper, H24 or H34 Alloy 5052 (UNS A95052) in accordance with SAE-AMS-QQ-A-250/8. Aluminum-pin-temper, H34 Alloy 5052, (UNS A95052) in accordance with ASTM B211.

   B. Brass-leaf-alloy 268 (UNS C26800) temper H02, in accordance with ASTM B36/B36M. Copper-pin-alloy 260 (UNS C26000) temper H02, in accordance with ASTM B134/B134M.

   C. Corrosion resistant steel-leaf, temper annealed composition 301 (UNS S30100) in accordance with ASTM A666, 302 (UNS S30200) or 304 (UNS S30400) in accordance with ASTM A240/A240M.
   Corrosion resistant steel-pin composition 302 (UNS S30200), 304 (UNS 30400), 305 (UNS S30500) and 316 (UNS S31600) in accordance with ASTM A313/A313M.

   D. Carbon steel-leaf-cold-rolled, temper no. 4 in accordance with ASTM-A109/109M. Carbon steel-pin-composition 1010 (UNS G10100), 1020 (UNS G10200) in accordance with ASTM A853.


   E. Carbon-steel-leaf-cold-rolled temper no. 4 in accordance with ASTM-A109/109M. Copper-pin-alloy 260 (UNS C26000) temper H02 in accordance with ASTM B134/B134M.

2. Finish. Material A, B, C and D shall be plain (uncoated). When specified, material D shall be zinc plated in accordance with ASTM B633, Type II, Fe/Zn 13 or cadmium plated in accordance with SAE-AMS-QQ-P-416, type II, Class 1. Material E shall be cadmium plated in accordance with SAE-AMS-QQ-P-416, Type II, Class 1.

3. Knuckles. End knuckles shall be a minimum of 1/2 of knuckle.

4. Pitch. Cumulative tolerance on pitch is ± 0.015 inches in any 36 inch segment.

Part or Identifying Number (PIN). The MS part number consists of the MS number plus the dash number followed by the applicable code for material from requirement 1.

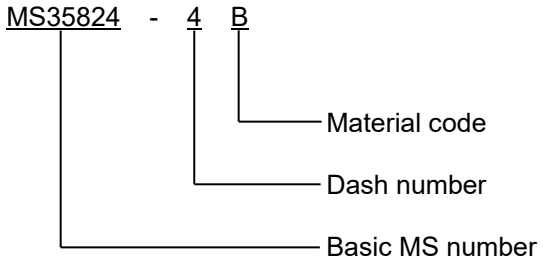


When protective finish is required for material D, add F to the part number.

NOTES:

1. All dimensions are in inches unless otherwise specified.

2. Hinges shall be stocked and issued in lengths of 120.00 inches. Application may be of any length within the above length.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:29Z
Check the source to verify that this is the current version before use.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Reference documents. in addition to MIL-DTL-9850, this document references the following:

| | |
|---|---|
| ASTM-A240/A240M | ASTM-A313/A313M |
| ASTM-A666 | ASTM-A853 |
| ASTM-B134/B134M | ASTM-B36/B36M |
| ASTM-B633 | SAE-AMS-QQ-A-250/8 |
| SAE-AMS-QQ-P-416 | ASTM-A109/109M |
| ASTM-B211 | |

CONCLUDING MATERIAL

Custodians:
Army - AR
Navy - AS
Air Force – 71
DLA - CC

Review activities:
Army – AT, AV
Navy – MC

Preparing Activity:
DLA – CC

(Project 5340-2026-001)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:29Z
Check the source to verify that this is the current version before use.