

REVIEWER ACTIVITIES: ARMY - MD
NAVY - AS, OS, YD



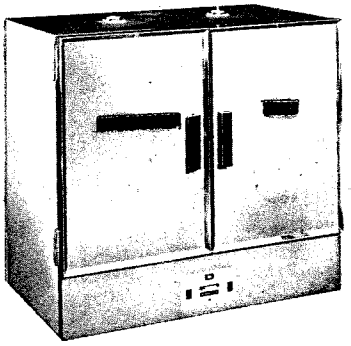

PART NUMBER	MINIMUM INNER CHAMBER DIMENSIONS in.			NUMBER OF OUTER DOORS	OPERATING TEMPERATURE RANGE
	WIDTH	DEPTH	HEIGHT		
MS36351-1	13	14	13	1	35° to 260°C
MS36351-2	19	14	19	1	35° to 260°C
MS36351-3	37	19	25	2	35° to 260°C

MATERIAL: Interior and exterior walls, doors, shelf supports, and shelves shall be of corrosion-resisting steel in accordance with Federal Standard No. 66, AISI 304.

Insulation shall be noncombustible, nonhygroscopic, nonpowdering, asbestos air cell or glass wool.

Heating elements shall be of a high resistant material, such as nickel-chromium.

Hardware shall be of chromium or nickel-plated, brass or high-pressure cast zinc alloy.

Door handles shall be of heat resisting material, such as polystyrene.

FINISH: Interior shall have No. 2B finish and exposed exterior surfaces shall have a No. 4 commercial grind polish.

DESIGN: Ovens shall be of the gravity convection type, rectangularly shaped with double walled construction and equipped with two shelves, a thermometer, indicator light, variable thermostat control, heater power input switch (s), and heating elements.

Shelves shall be removable, adjustable, and so constructed as to allow proper air circulation throughout the inner chamber.

Cabinet shall have an intake and exhaust vent for proper ventilation and shall have an opening in the top to accommodate a graduated glass thermometer.

Insulation shall be a minimum of 3 inches thick and shall completely envelop the inner chamber of the oven.

Temperature uniformity throughout the inner chamber shall not exceed 7°C within the temperature range.

Heating unit shall operate at 220 volts, 60 cycles, single phase alternating current.

All electrical components and insulations shall meet the requirements of the National Fire Protection Association, NFPA No. 70.

NOTES:
1. Overall dimensional limitations shall be specified on date of invitations for bid.
2. Items differing from this Military Standard by minor variations in design or dimensions are considered standard under this document, provided such variations do not affect performance and are not in conflict with the material requirements as specified herein.
3. For design feature purposes this standard takes precedence over procurement document referenced herein.
4. Referenced documents shall be of the issue in effect on date of invitations for bid.

APPROVED 10 Jun 1963 REVISED (A) 22 AUG 1969

(A) ENTIRE STANDARD REVISED

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. MU	TITLE	MILITARY STANDARD
Other Cust MS	OVEN, LABORATORY gravity convection	MS36351
PROCUREMENT SPECIFICATION NNN-O-1191	SUPERSEDES:	SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:39Z
Check the source to verify that this is the current version before use.