
FED SUP CLASS
3030

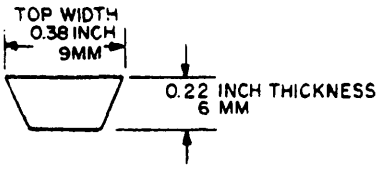

BELT CROSS-SECTION, NOMINAL

DASH NUMBERS AND EFFECTIVE OUTSIDE LENGTH

EFFECTIVE LENGTHS-INCHES			EFFECTIVE LENGTHS-MILLIMETERS		
DASH NO.	EFFECTIVE OUTSIDE LENGTH	TOLERANCE	DASH NO.	EFFECTIVE OUTSIDE LENGTH	TOLERANCE
-3L140	14.0	+0.12-0.38	-9R355	355	+3-10
-3L150	15.0	+0.12-0.38	-9R380	380	+3-10
-3L160	16.0	+0.12-0.38	-9R405	405	+3-10
-3L170	17.0	+0.12-0.38	-9R430	430	+3-10
-3L180	18.0	+0.12-0.38	-9R455	455	+3-10
-3L190	19.0	+0.12-0.38	-9R485	485	+3-10
-3L200	20.0	+0.12-0.38	-9R510	510	+3-10
-3L210	21.0	+0.25-0.62	-9R535	535	+3-10
-3L220	22.0	+0.25-0.62	-9R560	560	+3-10
-3L230	23.0	+0.25-0.62	-9R585	585	+3-10
-3L240	24.0	+0.25-0.62	-9R610	610	+3-10
-3L250	25.0	+0.25-0.62	-9R635	635	+3-10
-3L260	26.0	+0.25-0.62	-9R660	660	+6-16
-3L270	27.0	+0.25-0.62	-9R685	685	+6-16
-3L280	28.0	+0.25-0.62	-9R710	710	+6-16
-3L290	29.0	+0.25-0.62	-9R735	735	+6-16
-3L300	30.0	+0.25-0.62	-9R760	760	+6-16
-3L310	31.0	+0.25-0.62	-9R785	785	+6-16
-3L320	32.0	+0.25-0.62	-9R815	815	+6-16
-3L330	33.0	+0.25-0.62	-9R840	840	+6-16
-3L340	34.0	+0.25-0.62	-9R865	865	+6-16
-3L350	35.0	+0.25-0.62	-9R890	890	+6-16
-3L360	36.0	+0.25-0.62	-9R915	915	+6-16
-3L370	37.0	+0.25-0.62	-9R940	940	+6-16
-3L380	38.0	+0.25-0.62	-9R965	965	+6-16
-3L390	39.0	+0.25-0.62	-9R990	990	+6-16
-3L400	40.0	+0.25-0.62	-9R1015	1015	+6-16
-3L410	41.0	+0.25-0.62	-9R1040	1040	+6-16
-3L420	42.0	+0.25-0.62	-9R1065	1065	+6-16
-3L430	43.0	+0.25-0.62	-9R1090	1090	+6-16
-3L440	44.0	+0.25-0.62	-9R1120	1120	+6-16
-3L450	45.0	+0.25-0.62	-9R1145	1145	+6-16
-3L460	46.0	+0.25-0.62	-9R1170	1170	+6-16
-3L470	47.0	+0.25-0.62	-9R1195	1195	+6-16
-3L480	48.0	+0.25-0.62	-9R1220	1220	+6-16
-3L490	49.0	+0.25-0.62	-9R1245	1245	+6-16
-3L500	50.0	+0.25-0.62	-9R1270	1270	+6-16
-3L520	52.0	+0.25-0.62	-9R1320	1320	+6-16
-3L540	54.0	+0.25-0.62	-9R1370	1370	+6-16
-3L560	56.0	+0.25-0.62	-9R1420	1420	+6-16
-3L580	58.0	+0.25-0.62	-9R1475	1475	+6-16
-3L600	60.0	+0.25-0.62	-9R1525	1525	+6-16

ENTIRE STANDARD REVISED

APPROVED 31 AUGUST 1964 REVISED (A) 9 MAY 1973 (B) 22 JUNE 1981

REVIEW ACTIVITIES
USER ACTIVITIES

This military standard is approved for use by all departments and Agencies of the Department of Defense. Copy-fast for all new engineering and design applications and for repetitive use shall be avoided wherever practicable

P A ME	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust 99		BELT, V: FRACTIONAL HORSEPOWER (3L AND 9R CROSS-SECTIONAL DESIGNATION).	MS39241
PROCUREMENT SPECIFICATION ZZ-B-215	SUPERSEDES		SHEET 1 OF 2

DD FORM 672-1 (COORDINATED) 3030-0123

Source: https://assist.dla.mil -- Downloaded: 202640-23T17:49Z
Check the source to verify that this is the current version before use.

hours in a temperature and vibration environment applied to every RFQ-

FED. SUP CLASS
30 30

NOTES:

1. DIMENSIONS ARE IN INCHES AND MILLIMETERS (MM).
2. TO ORDER REQUIRED BELT SIZE SPECIFY ONLY ONE DASH NUMBER, EITHER -3L SERIES FOR INCH MEASUREMENT OR -9R SERIES FOR MILLIMETER MEASUREMENT.
3. THE MILLIMETER UNITS CHOSEN FOR THIS STANDARD ARE NOT ALWAYS AN EXACT ARITHMETIC CONVERSION OF THE CORRESPONDING INCH UNITS.
4. THE DASH NUMBERS CORRESPOND TO INDUSTRY STANDARD BELT SIZES. EXAMPLE: -3L140, THE -3L INDICATES CROSS SECTION DESIGNATION IN INCH DIMENSIONS, 140 INDICATES EFFECTIVE OUTSIDE LENGTH IN TENTHS OF INCHES; -9R355, THE -9R INDICATES CROSS SECTION DESIGNATION IN MILLIMETERS, 355 INDICATES EFFECTIVE OUTSIDE LENGTH IN MILLIMETERS.
5. OIL-RESISTANCE. SEE APPLICABLE PARAGRAPH IN ZZ-B-215. WHEN OIL-RESISTANCE IS REQUIRED THE DASH PRECEDING THE DASH NUMBER SHALL BE REPLACED BY THE LETTER "R".
6. THE MS PART NUMBER CONSISTS OF THE MS SHEET, PLUS OIL-RESISTANCE (WHEN APPLICABLE), PLUS THE DASH NUMBER (CROSS SECTION AND LENGTH).

EXAMPLES:

MS 39241 -3L 140

- 140 — 14-INCH EFFECTIVE OUTSIDE LENGTH IN TENTHS OF INCHES.
- -3L — CROSS SECTION DESIGNATION.

MS 39241 R 9R 355

- 355 — 355 MM EFFECTIVE OUTSIDE LENGTH.
- 9R — CROSS SECTION DESIGNATION.
- R — OIL-RESISTANCE REQUIRED.

7. BELT RIDE LIMITS ARE +0.10, -0.03 INCH (+2.5, -0.8 MM); MIN. BOTTOM CLEARANCE IS 0.08 INCH (2.0 MM) ON TEST PULLEY. SEE APPLICABLE PARAGRAPH IN ZZ-B-215.
8. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
9. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS, OR REQUEST FOR PROPOSAL, EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.

APPROVED 31 AUGUST 1964 REVISED (B) FOR CHANGES SEE SHEETS 1 AND 2

P A ME / Other Cust 99	INTERNATIONAL INTEREST	TITLE: BELT, V: FRACTIONAL HORSEPOWER (3L AND 9R CROSS-SECTIONAL DESIGNATION).	MILITARY STANDARD MS39241
PROCUREMENT SPECIFICATION ZZ-B-215	SUPERSEDES:		SHEET 2 OF 2

DD FORM 672-1 (COORDINATED)

Source: https://assist.dla.mil -- Downloaded: 202610-23T17:49Z
Check the source to verify that this is the current version before use.