
FED. SUP CLASS
2320

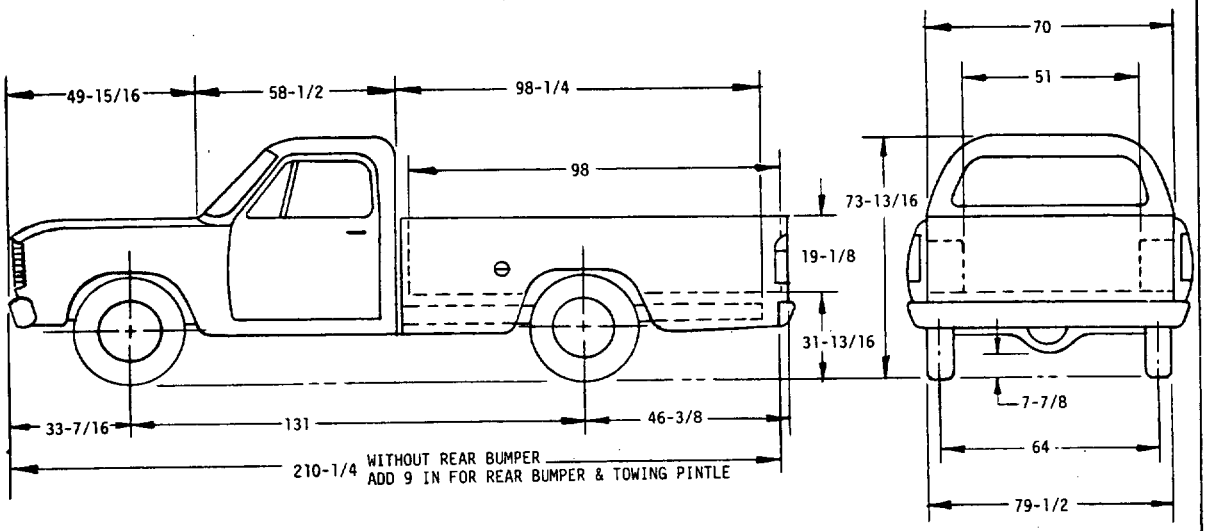

INCHES	CM
7-7/8	20
9	22.9
19-1/8	48.6
31-13/16	80.8
33-7/16	84.9
46-3/8	117.8
49-15/16	126.8
51	129.5
58-1/2	148.6
64	162.6
70	177.8
73-13/16	187.5
79-1/2	201.9
98	248.9
98-1/4	249.6
131	332.7
210-1/4	534

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FROM: US ARMY-AUTOMOTIVE COMMAND, WARREN, MICH. 48090.

Ⓐ ENTIRE STANDARD REVISED

MS PART NO.	ENGINEERING DRAWING NO.
MS52137-1	8736960

APPROVED 26 Aug 1977 REVISED Ⓐ 20 MAY 85

P.A. ARMY-AT Other Cust	TITLE TRUCK, CARGO, 1 1/4 TON, 131 IN. WHEEL BASE, M880 4x4 (COMMERCIAL)	MILITARY STANDARD MS52137(AT)
PROCUREMENT SPECIFICATION MIL-T-62188	SUPERSEDES:	SHEET 1 OF 4

DD FORM 1 SEP 87 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:20Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2320

VEHICLE CHARACTERISTICS

WEIGHTS:	
CURB	4648
PAYLOAD (INCLUDING THREE MEN)	3100
GVWR	8000
DISTRIBUTION:	
EMPTY FRONT	2727
EMPTY REAR (CURB)	1921
LOADED FRONT	3190
LOADED REAR	4558
TOWED LOAD: LOADED	3000
TURNING RADIUS:	576 IN
DIMENSIONS:	
FRAME	6-3/16 X 2-5/16 X 3/16
FRAME, MAX SECTION MODULUS	3.88 IN^3
ENGINE:	
FUEL, GASOLINE	LEADED/NON-LEADED
FUEL, OCTANE	83/91 (M/R) MIN
CYLINDERS	8
PISTON DISPLACEMENT	318.3 CU IN
BORE	3.91
STROKE	3.31
HORSEPOWER, NET AT 4000 RPM	150
MAX NET TORQUE AT 2400 RPM	230 LB FT
CARBURETOR:	BBD-2BBL
FUEL PUMP:	MS6449S
COOLING SYSTEM:	18 QTS
LUBRICATION SYSTEM:	
ENGINE OIL	5 QTS IN PAN
AXLES:	
FRONT LOAD RATING	3500 LBS
TYPE	FULL FLOAT
INPUT TORQUE	268 LB FT
OIL	4 PTS
REAR LOAD RATING	5500 LBS
TYPE	FULL FLOAT
INPUT TORQUE CAPACITY	365 LB FT
OIL	6 PTS
AXLE RATIO	4.10 TO 1
AXLE SHAFT	
MIN DIAMETER	1-3/16
SPLINE DIAMETER	1-5/16
SPRINGS:	
FRONT LOAD RATING	1550/1800 LBS
TYPE MULIT-LEAF SYMMETRICAL	
REAR LOAD RATING	2200/2450
TYPE MULIT-LEAF UNSYMMETRICAL	
SHOCK ABSORBERS:	
TYPE	1-3/8 IN DIA
DOUBLE ACTION	
WHEELS:	
TYPE	DROP CENTER RIM
RIM SIZE	16-1/2 X 6-3/4
TIRES: (TUBELESS)	
SIZE	9-1/2 OR 16-1/2 D
TREAD DESIGN	ON & OFF HIGHWAY
PLY	8
BRAKES:	HYDRAULIC
FRONT	3-1/8 DISC
REAR	12 X 2-1/2 DRUM
LINING AREA: FRONT &	41-11/16 SQ IN
REAR	122-11/16 SQ IN
LINING THICKNESS	
FRONT - OUTER 7/16	INNER 1/2
REAR - PRIMARY 3/16	SECONDARY 1/4

OIL FILTER:	
TYPE	FULL FLOW
CAPACITY	1 PT
FUEL SYSTEM:	
NUMBER OF TANKS	1
CAPACITY	20 GALS
LOCATION	MID-SHIP INBOARD OF FRAME RAILS
AIR CLEANER:	PAPER
TRANSMISSION:	AUTOMATIC
REDUCTIONS:	
FORWARD	2.45/1.45/1.00
REVERSE	2.20
INPUT TORQUE	615 LB FT
OIL	19 PTS
CONVERTER:	
SIZE	11-3/4 DIA
STALL RATIO	2.07
TRANSFER CASE:	
SPEEDS	2
REDUCTIONS	2.01/1.00
INPUT TORQUE:	
HIGH RANGE	2000 LB FT
LOW RANGE	1000 LB FT
OIL	9 PTS
PROPELLER SHAFTS:	
INPUT TORQUE	FRONT 1990 LB FT
	REAR 3330 LB FT
MASTER CYLINDER:	TANDEM
SIZE	1-1/8 X 1-5/16
WHEEL CYLINDER SIZE:	
FRONT	3-1/8
REAR	1
POWER BOOSTER:	TANDEM DIAPHRAGM 8-13/16 OD
PARKING BRAKE:	INTERNAL - EXPANDING
SIZE	2-1/2
ELECTRICAL:	12 VOLTS
GROUND	NEGATIVE
ALTERNATOR:	50 AMP
CAPACITY	55 AMPS @ 14 VOLTS
CAPACITY AT IDLE	34 AMPS
STARTER:	1-1/2 H P
VOLTAGE REGULATOR:	3 AMP
BATTERY:	80 AMP HR @ 20 HR RATE
DIRECTIONAL SIGNALS:	CLASS A
WINDSHIELD WIPER:	DUAL, ELECTRIC 12 VOLT, 2 SPEED
HORN:	ELECTRIC 12 VOLT
PINTLE HOOK:	8380198
BODY:	458 LBS
FLOOR MATERIAL STEEL, CR 0.052 THICK	

APPROVED 26 Aug 1977 REVISED (A) 20 MAY 85

(A) ENTIRE STANDARD REVISED

MS PART NO.	ENGINEERING DRAWING NO.
MS52137-1	8736960

P.A. ARMY-AT
Other Cust

TITLE: TRUCK, CARGO, 1 1/4 TON, 131 IN. WHEEL BASE, M880 4x4 (COMMERCIAL)

MILITARY STANDARD
MS52137(AT)

PROCUREMENT SPECIFICATION: MIL-T-62188

SUPERSEDES:

SHEET 2 OF 4


DD FORM 1 SEP 67 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:20Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2320

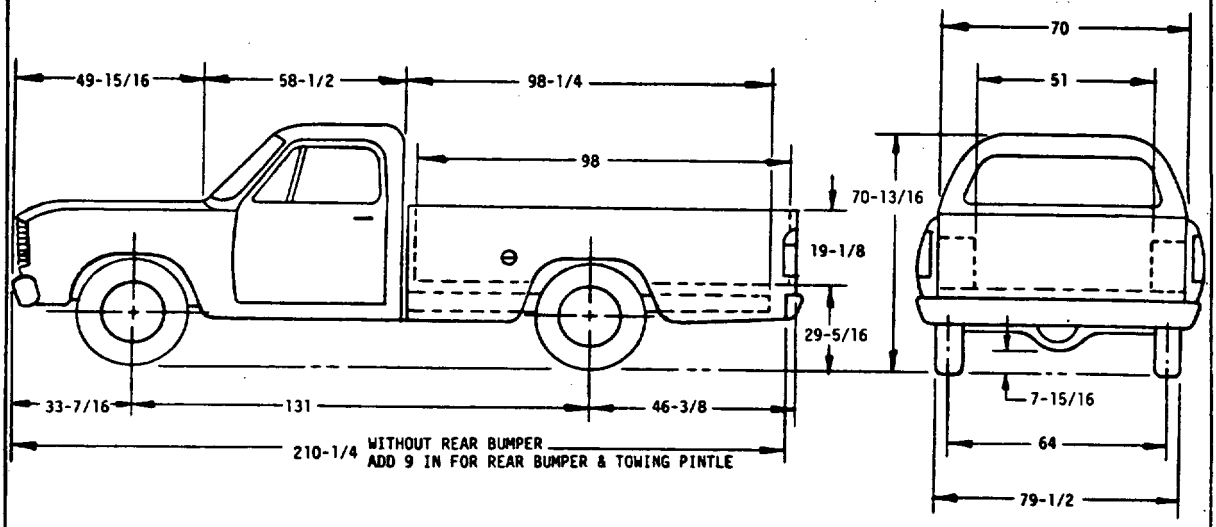

INCHES	CM
7-15/16	20.2
9	22.9
19-1/8	48.6
29-5/16	74.5
33-7/16	84.9
46-3/8	117.8
49-15/16	126.8
51	129.5
58-1/2	148.6
64	162.6
70	177.8
70-13/16	179.9
79-1/2	201.9
98	248.9
98-1/4	249.6
131	332.7
210-1/4	534

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FROM: US ARMY-AUTOMOTIVE COMMAND, WARREN, MICH. 48090.

APPROVED 26 Aug 1977 REVISED (A) 20 MAY 85

(A) ENTIRE STANDARD REVISED

MS PART NO.	ENGINEERING DRAWING NO.
MS52137-2	8736961

P.A. ARMY-AT Other Cust	TITLE TRUCK, CARGO, 1 1/4 TON, 131 IN. WHEEL BASE, M890 4x2 (COMMERCIAL)	MILITARY STANDARD MS52137(AT)
PROCUREMENT SPECIFICATION MIL-T-62188	SUPERSEDES:	SHEET 3 OF 4

DD FORM 1 SEP 87 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:20Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2320

VEHICLE CHARACTERISTICS

WEIGHTS:	
CURB	4217
PAYLOAD (INCLUDING THREE MEN)	3100
GVWR	7500
DISTRIBUTION:	
EMPTY FRONT (CURB)	2363
EMPTY REAR (CURB)	1854
LOADED FRONT	2826
LOADED REAR	4491
TOWED LOAD: LOADED	3000
TURNING RADIUS:	576 IN
DIMENSIONS:	
FRAME	6-3/16 X 2-5/16 X 3/16
FRAME, MAX SECTION MODULUS	3.88 IN^3
ENGINE:	
FUEL, GASOLINE	LEADED/NON-LEADED
FUEL, OCTANE	83/91 (M/R) MIN
CYLINDERS	8
PISTON DISPLACEMENT	318.3 CU IN
BORE	3.91
STROKE	3.31
HORSEPOWER, NET AT 4000 RPM	150
MAX NET TORQUE AT 2400 RPM	230 LB FT
CARBURETOR:	BBD-2BBL
FUEL PUMP:	MS6449S
AXLES:	
FRONT LOAD RATING	3300 LBS
TYPE	FULL FLOAT
INPUT TORQUE	N/A
OIL	N/A
REAR LOAD RATING	5500 LBS
TYPE	FULL FLOAT
INPUT TORQUE CAPACITY	365 LB FT
OIL	6 PTS
AXLE RATIO	4.10 TO 1
AXLE SHAFT	
MIN DIAMETER	1-3/16
SPLINE DIAMETER	1-5/16
SPRINGS:	
FRONT TYPE COIL	
MODEL-3492935 MECHANICAL SPRING	
LOAD RATING	1475/1645 LBS
REAR TYPE MULTI-LEAF UNSYMMETRICAL	
LOAD RATING	2500/2725
SHOCK ABSORBERS:	
TYPE 1-3/8 IN DIA DOUBLE ACTION	
WHEELS:	
TYPE	DROP CENTER RIM
RIM SIZE	16.5 X 6.75
TIRES: (TUBLESS)	
SIZE	9-1/2 X OR 16-1/2 D
TREAD DESIGN	ON & OFF HIGHWAY
PLY RATING	8
BRAKES:	HYDRAULIC
FRONT	3-1/8 DISC
REAR	12 X 2-1/2 DRUM
LINING AREA FRONT &	41-11/16
REAR	122-11/16
LINING THICKNESS	
FRONT - OUTER 7/16	INNER 1/2
REAR - PRIMARY 3/16	SECONDARY 1/2
COOLING SYSTEM:	18 QTS
LUBRICATION SYSTEM:	
ENGINE OIL	5 QTSIN PAN
OIL FILTER:	
TYPE	FULL FLOW
CAPACITY	1 PINT
FUEL SYSTEM:	
NUMBER OF TANKS	1
CAPACITY	20 GALS
LOCATION MID-SHIP INBOARD OF FRAME RAILS	
AIR CLEANER:	PAPER
TRANSMISSION:	AUTOMATIC
REDUCTIONS:	
FORWARD	2.45/1.45/1.00
REVERSE	2.20
INPUT TORQUE CAPACITY	615 LB FT
OIL	19 PTS
CONVERTER:	
SIZE	11-3/4 DIA
STALL RATIO	2.07
MASTER CYLINDER:	TANDEM
SIZE	1-1/8 X 1-5/16
WHEEL CYLINDER SIZE:	
FRONT	3-1/8
REAR	1

POWER BOOSTER: TANDEM DIAPHRAGM 8-13/16 OD

PARKING BRAKE:	
TYPE	INTERNAL- EXPANDING
SIZE	12 X 2-1/2
ELECTRICAL:	12 VOLTS
GROUND	NEGATIVE
ALTERNATOR:	50 AMP
CAPACITY	55 AMPS @ 14 VOLTS
CAPACITY AT IDLE	34 AMPS
STARTER:	1.5 H P
VOLTAGE REGULATOR	3 AMP
BATTERY:	80 AMP HR @ 20 HR RATE
DIRECTIONAL SIGNALS:	CLASS A
WINDSHELD WIPER:	DUAL, ELECTRIC 12 VOLT, 2 SPEED
HORN:	ELECTRIC 12 VOLT
PINTLE HOOK:	8380198
BODY:	
WEIGHT	458 LBS
FLOOR MATERIAL STEEL, CR 0.052 THICK	

APPROVED 26 Aug 1977 REVISED (A) 20 MAY 85

(A) ENTIRE STANDARD REVISED

MS PART NO.	ENGINEERING DRAWING NO.
MS52137-2	8736961

P.A. ARMY-AT
Other Cust

TITLE: TRUCK, CARGO, 1 1/4 TON, 131 IN. WHEEL BASE, M890 4x2 (COMMERCIAL)

MILITARY STANDARD
MS52137(AT)

PROCUREMENT SPECIFICATION: MIL-T-62188

SUPERSEDES:

SHEET 4 OF 4

DD FORM 1 SEP 87 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:20Z
Check the source to verify that this is the current version before use.