

FED. SUP CLASS
5950

CASE, MOUNTING, TERMINAL ARRANGEMENT, AND MARKING

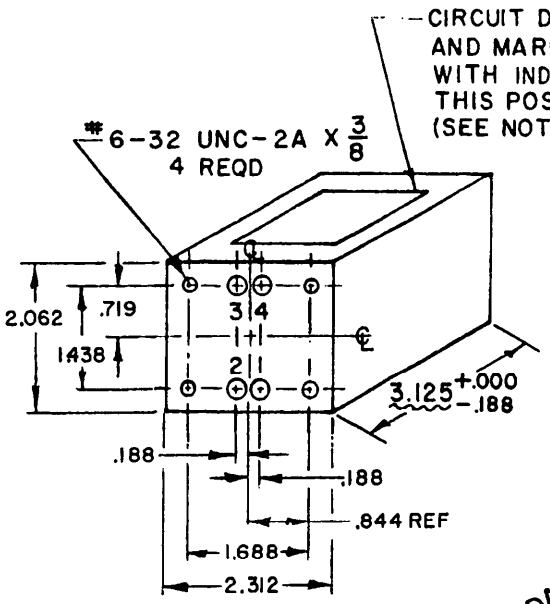

MINIMUM CHASSIS CUTOUT

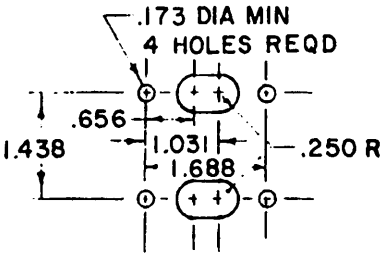


CIRCUIT DIAGRAM AND MARKING

MAX WORKING VOLTAGE 1,000V

120 CPS

SERIES - 16H
250 V RMS
.080 AMP DC
645 OHMS

PARALLEL - 4H
125 V RMS
.160 AMP DC
160 OHMS

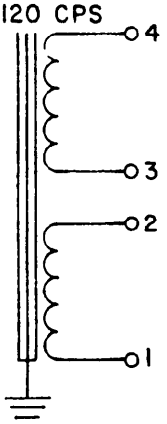

MAX ALTITUDE - 10,000 FT

INCHES	MM
.173	4.39
.188	4.77
.250	6.35
.65	16.51
.719	18.26
.844	21.44
1.031	26.19
1.438	36.53
1.688	42.88
2.062	52.37
2.312	58.72
3.125	79.38
3/8	9.53

Ⓑ THIS MILITARY STANDARD INACTIVE FOR DESIGN AFTER 28 DECEMBER 1977. USE MIL-T-27/209.

NOTES:
1. All dimensions in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance on case dimensions is +.000 (.00 mm), −.125 (3.18 mm).
4. Tolerance on mounting dimensions is ±.016 (.41 mm). Mounting studs are symmetrically located.
5. Tolerance on terminal positioning dimensions is ±.125 (3.18 mm). Terminals fit within minimum chassis cutout.
6. Type designation, MS part no. and manufacturer's name or symbol to be marked on side opposite terminals.
7. Referenced document shall be of the issue in effect on date of invitation for bids.
8. This standard takes precedence over document referenced herein.

Ⓑ DENOTES CHANGES

MS PART NO. MS90009-2

APPROVED 9 JUNE 1958 REVISED Ⓐ 21 Sep 65 Ⓑ 28 DEC 1977

P.A. Army - EL Other Cust Navy - EC Air Force - 85	TITLE Ⓑ INDUCTOR, POWER, TYPE TF4RO4FA	MILITARY STANDARD MS90009
Procurement Specification MIL-T-27	SUPERSEDES:	PAGE 1 OF 2

DD FORM 25 OCT 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 5950-0551

Reviewer user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS (FSC listing).
AF 11, 85, 17 @ 19, 14 Army EL, AR Navy WP, SH @ MC

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:31Z
Check the source to verify that this is the current version before use.

Reviewer: user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS (FSC listing).
Navy ☒ WP, SH @ MC
Army ☒ EL, AR
AF ☒ 11, 85, 17 @ 19, 14

FED. SUP CLASS
5950

ELECTRICAL RATING

Inductance:
(1–4) - - - - - - - - - - - - - - - - 16 h min
(1–3) and (2–4) - - - - - - - - - 4 h min
Current:
(1–4) - - - - - - - - - - - - - - - - .080 amp dc
(1–3) and (2–4) - - - - - - - - - .160 amp dc
Voltage:
(1–4) - - - - - - - - - - - - - - - - 250 v rms
(1–3) and (2–4) - - - - - - - - - 125 v rms
Frequency - - - - - - - - - - - - - - 120 cps, ±10%

DC resistance:
(1–2) - - - - - - - - - - - - - - - - - - 295 ohms, ±10%
(3–4) - - - - - - - - - - - - - - - - - - 350 ohms, ±10%
Duty cycle - - - - - - - - - - - - - - - - Continuous
Life expectancy - - - - - - - - - - - - 10,000 hr min
Max working voltage:
(1–4) - - - - - - - - - - - - - - - - - - 1,000 v
(1–3) and (2–4) - - - - - - - - - - - - 1,000 v
Altitude - - - - - - - - - - - - - - - - - - 10,000 ft max
Operating temperature - - - - - - - - - - 105° C max

Note: When numbers in parentheses, eg (1–2), are used, they indicate the winding and the extreme terminals of the winding. When the extreme terminals of both windings are used, eg (1–4), the windings are connected in series, ie, terminals 2 and 3 are connected. When the extreme terminal of one winding and the extreme terminal of another winding are used, eg (1–3) and (2–4), the windings are connected in parallel.

PHYSICAL CHARACTERISTICS

Case size - - - - - - - - - - - - FA
Weight - - - - - - - - - - - - - - 2 lb max
Terminals - - - - - - - - - - - - Solder lug, No. 18 AWG
Terminal height - - - - - - - - .563 (14.30 mm) $^{+.000}_{-.188}$ (4.78 mm)
Shock - - - - - - - - - - - - - - Method I, test condition C (50 G)

TEST	ELECTRICAL PROPERTIES				LIMITS
Dielectric withstanding voltage: At sea level	Windings	(1–4)	(1–3)	(2–4)	- - -
	Volts rms	2,400	2,400	2400	
DC resistance and resistive unbalance	(1–2): 295 ohms (3–4): 350 ohms Resistive unbalance not applicable				±10% ±10%
Inductance and inductive unbalance	With 50 v, 120 cps, and .080 amp dc applied to (1–4): 16 h With 50 v, 120 cps, and .160 amp dc applied to (1–3) and (2–4): 4 h Inductive unbalance not applicable				Min Min
Polarity	Additive, with terminals 2 and 3 connected				- - -
Temperature rise	40° C with 250 v, 108 cps, and .080 amp dc applied to (1–4) at an ambient temperature of 65° C				Max

APPROVED 9 JUNE 1958 REVISED Ⓑ FOR CHANGES SEE PAGE 1

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document

P.A. Army - EL Other Cust Navy - EC Air Force - 85	TITLE Ⓑ INDUCTOR, POWER, TYPE TF4RO4FA	MILITARY STANDARD MS90009
Procurement Specification MIL-T-27	SUPERSEDES:	PAGE 2 OF 2

DD FORM 25 OCT 63 672 *(Coordinated)* PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:31Z
Check the source to verify that this is the current version before use.