This document has been promulgated by the Department of Defense as the military standard to limit the selection of the item, product, or design, covered herein in engineering, design, and procurement. This standard shall become effective not later than 90 days after the latest date of approval shown.

FED. SUP CLASS.
5340

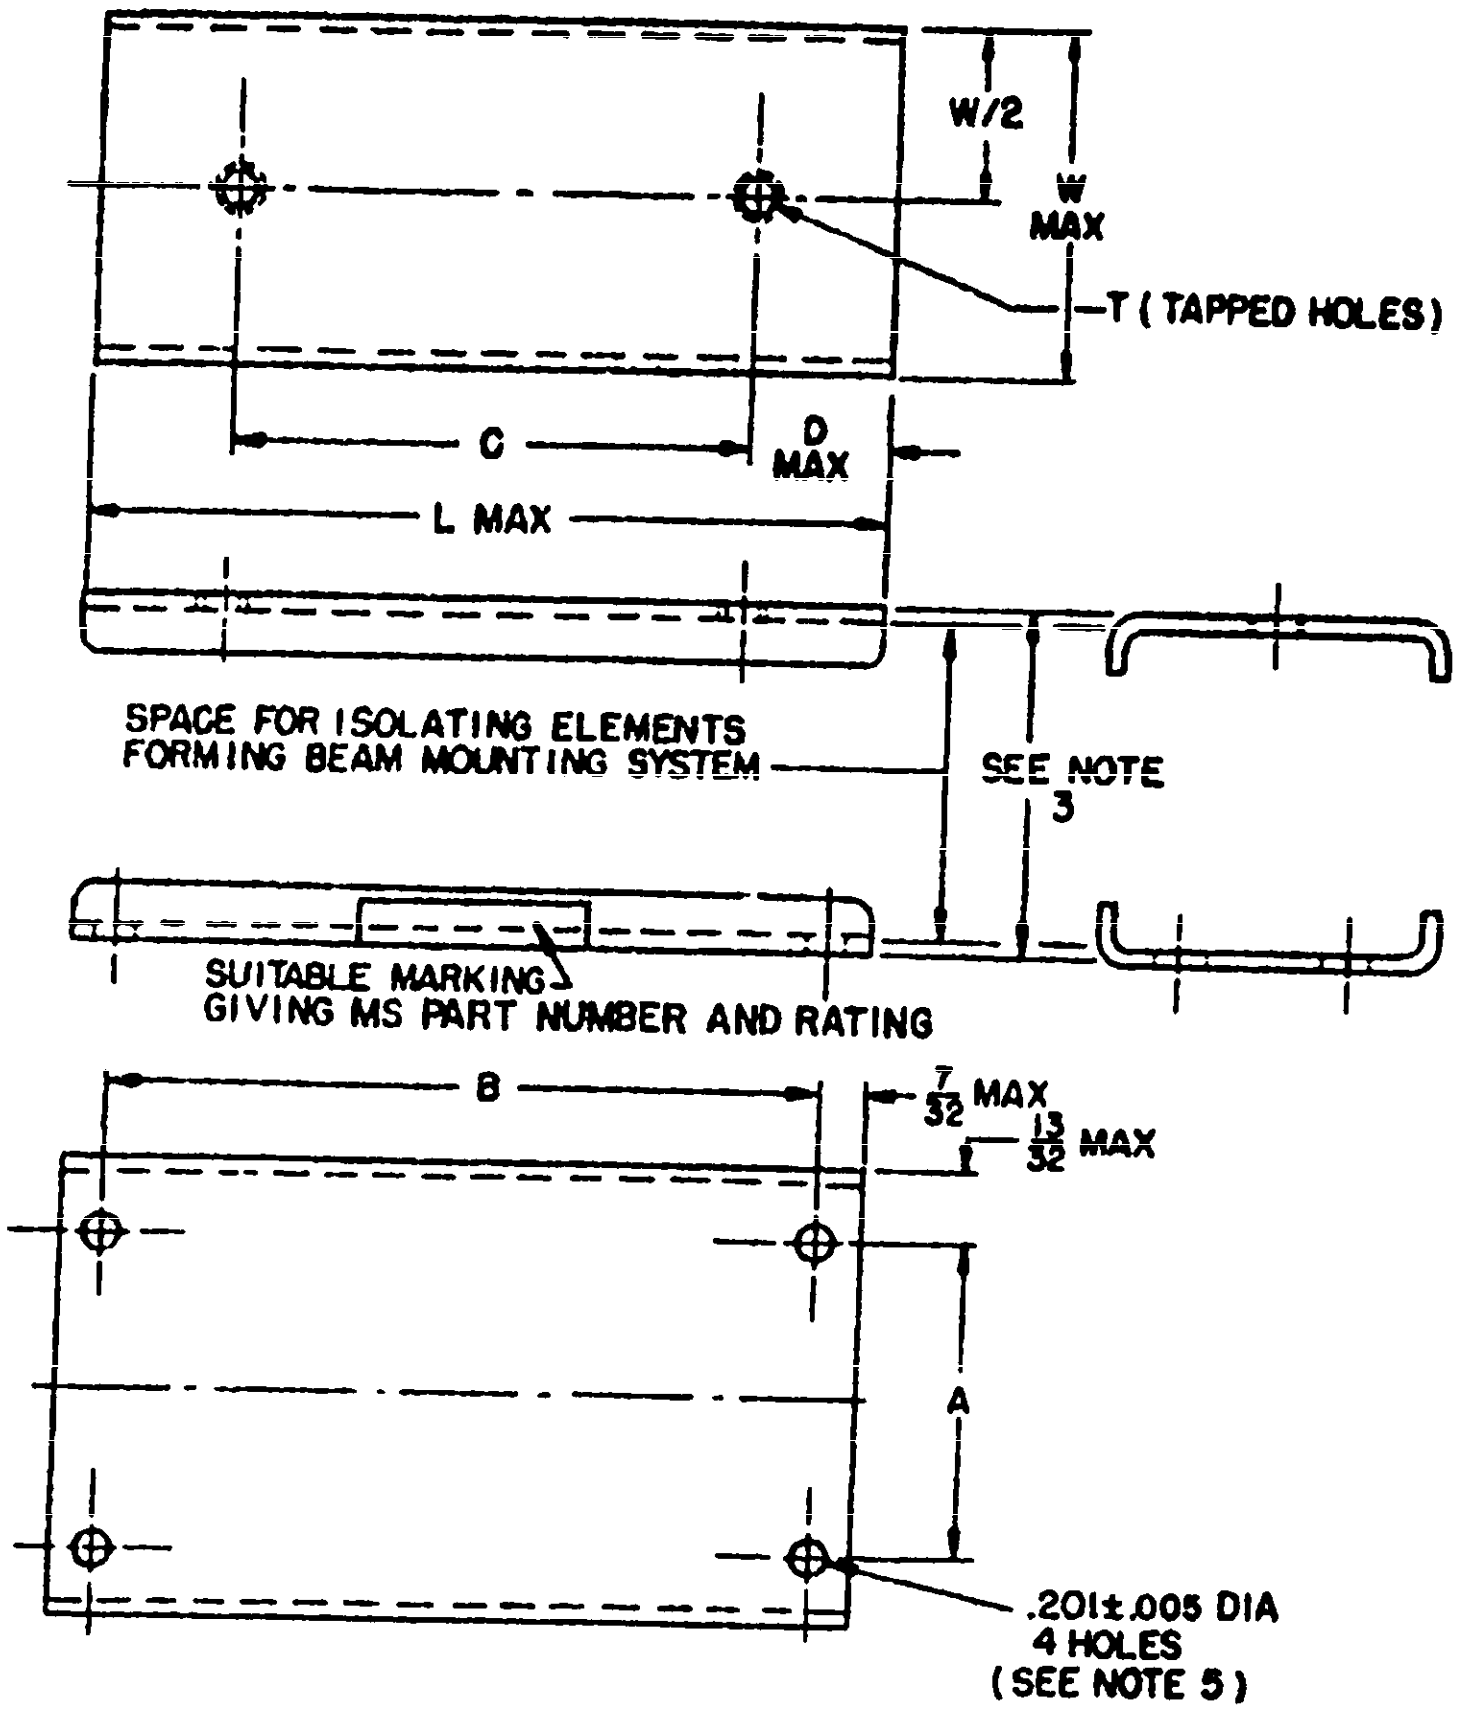

W/2
W MAX
T (TAPPED HOLES)
C
D MAX
L MAX
SPACE FOR ISOLATING ELEMENTS FORMING BEAM MOUNTING SYSTEM
SEE NOTE 3
SUITABLE MARKING GIVING MS PART NUMBER AND RATING
B
7/32 MAX
13/32 MAX
A
.201±.005 DIA
4 HOLES
(SEE NOTE 5)

1. All dimensions in inches.
2. Unless otherwise specified, tolerances are ±1/64 on fractions.
3. The nominal design value at minimum rated load is 1-3/8 for dimpled mounting and 1-9/16 for flat mounting. The manufacturer's rated loaded height at minimum rated load is the nominal design value +1/32, -1/16. (See note 4.)
4. The loaded height of the vibration mount at minimum rated load is the manufacturer's rated loaded height ±3/64.
5. This dimension is the final clearance diameter, with or without eyelet.
6. The MS part number consists of the MS military-standard number followed by a dash number. The dash number indicates the following:
   - First character - Size.
   - Second character - Class.
   - Third character - Serially assigned to load ranges within each size and class.
   - Fourth character - Serially assigned within the same size, class, and load range, when the dimensions differ.
7. Qualification inspection required.
8. Referenced document shall be of the issue in effect on date of invitation for bids.
9. This standard takes precedence over document referenced herein.

THIS STANDARD IS FOR REPLACEMENT PURPOSES ONLY. FOR NEW DESIGNS SEE MS91526.

Ⓑ ENTIRE STANDARD REVISED

APPROVED 14 May 1954 REVISED Ⓐ 11 Oct 1955 Ⓑ 8 Dec 1958

CUSTODIANS: SigC Aer USAF	OTHER INT: N-	**MILITARY STANDARD** MOUNTS, VIBRATION, BEAM-TYPE, CLASSES A & B, COARSE THREAD (FOR USE WITH ELECTRONIC EQUIPMENT IN AIRCRAFT)	**MS91406**
PROCUREMENT SPECIFICATION MIL-C-172		SUPERSEDES:	SHEET 1 OF 2

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 202640-23T20:42Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 5340

CLASS A

MS part number (see note 6)	Size	Dimensions L	W	A	B	C	D	T	Two-to-one load rating	FIIN[1]
		Inches	Inches	Inches	Inches	Inches	Inches		Pounds	
MS91406-1AA1 MS91406-1AB1	1	6-5/64	2-13/64	1-3/8	5-5/8	4-1/4	29/32	8-32 NC-2B	3 to 6 5 to 10	
MS91406-2AA1 MS91406-2AB1 MS91406-2AC1	2	5-57/64	2-49/64	1-15/16	5-7/16	3-1/2	1-3/16	1/4-20 UNC-2B	4 to 9 6 to 10 9 to 20	
MS91406-2AC2 MS91406-2AD1 MS91406-2AE1	2	11-9/64	2-49/64	1-15/16	10-11/16	8-3/4	1-3/16	1/4-20 UNC-2B	9 to 20 12-1/2 to 25 20 to 40	
MS91406-2AE2	2	16-25/64	2-49/64	1-15/16	15-15/16	14	1-3/16	1/4-20 UNC-2B	20 to 40	

---

[1] Federal Item Identification Number.

CLASS B

MS part number (see note 6)	Size	Dimensions L	W	A	B	C	D	T	Load rating, ±15%	FIIN[1]
		Inches	Inches	Inches	Inches	Inches	Inches		Pounds	
MS91406-1BA1 MS91406-1BB1 MS91406-1BC1 MS91406-1BD1 MS91406-1BE1 MS91406-1BF1 MS91406-1BG1 MS91406-1BH1 MS91406-1BJ1 MS91406-1BK1 MS91406-1BL1 MS91406-1BM1 MS91406-1BN1 MS91406-1BO1	1	6-5/64	2-13/64	1-3/8	5-5/8	4-1/4	29/32	8-32 NC-2B	.4 .6 .8 1.2 1.6 2 2-3/4 3-1/2 4-3/4 6-1/2 8-1/2 11-1/2 15-1/2 20	
MS91406-2BA1 MS91406-2BB1 MS91406-2BC1 MS91406-2BD1 MS91406-2BE1 MS91406-2BF1	2	5-57/64	2-49/64	1-15/16	5-7/16	3-1/2	1-3/16	1/4-20 UNC-2B	4-1/2 6 8 11 15 20	
MS91406-2BC2 MS91406-2BD2 MS91406-2BE2 MS91406-2BF2 MS91406-2BG1 MS91406-2BH1	2	11-9/64	2-49/64	1-15/16	10-11/16	8-3/4	1-3/16	1/4-20 UNC-2B	8 11 15 20 27 36	
MS91406-2BF3 MS91406-2BG2 MS91406-2BH2 MS91406-2BJ1 MS91406-2BK1 MS91406-2BL1	2	16-25/64	2-49/64	1-15/16	15-15/16	14	1-3/16	1/4-20 UNC-2B	20 27 36 48 64 86	

---

[1] Federal Item Identification Number.

APPROVED 14 May 1954 REVISED Ⓐ 11 Oct 1955 Ⓑ 8 Dec 1958

CUSTODIANS: SigC Aer USAF	**OTHER INT:** N-	**MILITARY STANDARD** MOUNTS, VIBRATION, BEAM-TYPE, CLASSES A & B, COARSE THREAD (FOR USE WITH ELECTRONIC EQUIPMENT IN AIRCRAFT)	**MS91406**
PROCUREMENT SPECIFICATION MIL-C-172		**SUPERSEDES:**	SHEET 2 OF 2

When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:42Z
Check the source to verify that this is the current version before use.