INCH-POUND
MIL-PRF-27639D
AMENDMENT 1
26 June 1998

PERFORMANCE SPECIFICATION

VALVE, PNEUMATIC INFLATOR (LIFE PRESERVER, FLU-1/P)

This amendment forms a part of MIL-PRF-27639D, dated 20 June 1997 and is approved for use by all Departments and Agencies of the Department of Defense.

Page 1

Title: Delete "FLU-1A/P" and substitute "FLU-1/P"

1.1 Delete "FLU-1A/P" and substitute "FLU-1/P"

Page 2

Add:

"2.2.2 Other Government documents, drawings, and publications. The following Government documents and drawings form a part of this document to the extent specified herein. Unless otherwise specified, the applicable issues are cited in the solicitation (see 6.2)

DRAWINGS

Air Force

58A3567	-	Gasket - Life Preserver Inflator, Inlet
58A3568	-	Gasket - Life Preserver, Inflator Stem, Upper
58A3569	-	Gasket - Life Preserver, Inflator Stem, Lower
61B4313	-	Lanyard, Valve-Life Preserver

(Copies of drawings required by contractors should be obtained from the procuring activity or as directed by the procuring activity.)"

Page 4

3.8.6 Delete and substitute:

"Lanyard. A lanyard conforming to Drawing 61B4313 shall be attached to the lever of the inflating assembly."

3.8.7 Add 2 sentences at the end of paragraph:

"The inlet gasket shall conform to Drawing 58A3567. The outlet gaskets shall conform to Drawings 58A3568 and 58A3569.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:33Z
Check the source to verify that this is the current version before use.

3.9.3 Delete and substitute:

"Lever operation. An installed cylinder conforming to MIL-PRF-25369 shall be punctured and the piercing pin shall be retracted when the lever is rotated in an arc from the unoperated position. It shall not be possible without a tool to return the lever to the unoperated position when it reaches an angle of more than 90 degrees from longitudinal axis of the inflating assembly."

Page 5

3.9.11 Delete "FLU-1A/P" and substitute "FLU-1/P".

Page 6

4.3.1.2 Add sub-paragraph as follows:

"d. Vent (see 3.8.4.1)"

Page 8

4.7.4 Delete and substitute:

"Actuator Operation. A cylinder conforming to MIL-PRF-25369 shall be installed on the inflating assembly. The lever arm shall be rotated in an arc from the unoperated position. Failure of the pin to pierce the cylinder or failure of the lever to lock in the operated position when it reaches an angle of nor more than 90 degrees from the longitudinal axis of the inflating assembly shall be cause of rejection."

Page 9

4.7.7 Delete and substitute:

"Leakage. With the inflator valve mounted on a valve stem, with the valve stem cap in place, the actuator shall be moved slowly through a normal cycle of operation while the inflator valve is submerged in water and is subjected to an internal pressure of 2 PSI for not less than 10 seconds. This test shall be repeated except that the internal pressure applied shall be 40 PSI. There shall be no evidence for leakage from the inflator valve."

4.7.8 Delete and substitute:

"Operation test with CO2 cylinder. The inflator valve shall be mounted on a valve stem with the valve stem cap in place. A charged CO2 cylinder conforming to MIL-PRF-25369 shall be installed. The inflator assembly shall be held in an inverted position with a load attached to the end of the actuator and the actuator held in the normal position. The outlet shall be equipped with a chamber that shall provide between 1.5 and 2.5 PSI backpressure on the inflator valve. The inflator valve and load shall be submerged in water. The load shall be such that a moment of 20 inch pounds is applied to the actuator. When the load is released, the actuator shall operate the piercing mechanism, which shall pierce and discharge the CO2 cylinder in not more than two and one half seconds. The actuator safety restraint shall not be secured to the actuator in this test. No leakage shall be evident during the duration of this test."

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:33Z
Check the source to verify that this is the current version before use.

Figure 1: Delete and substitute with Figure 1.

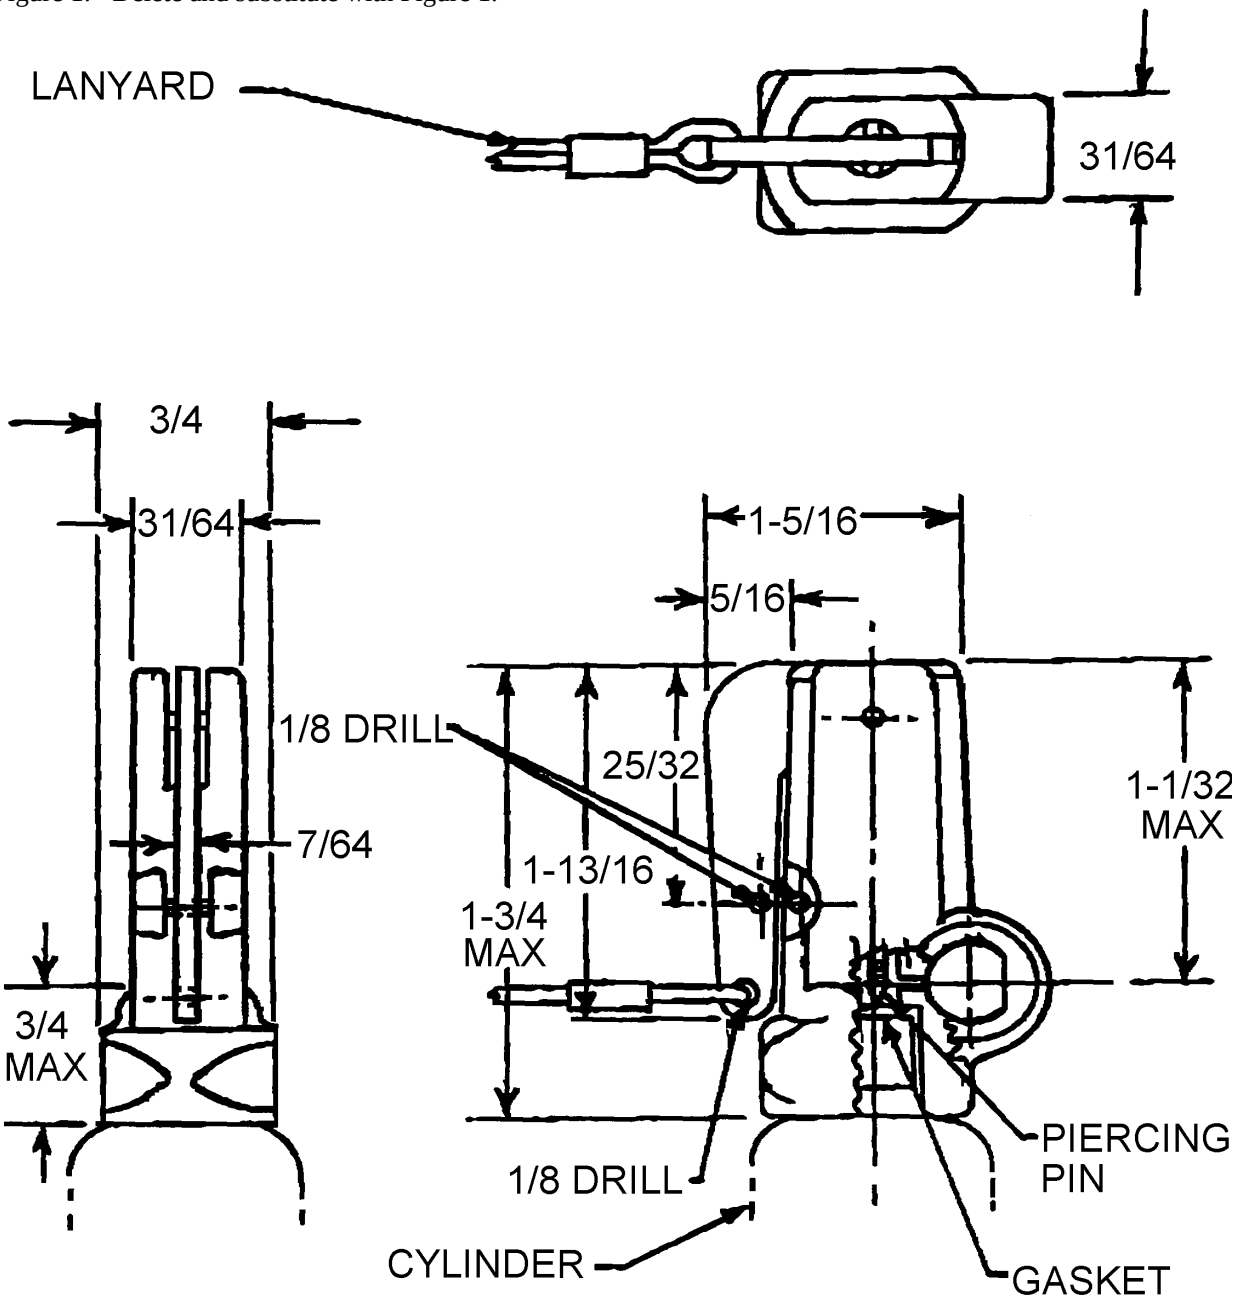

NOTE:

DIMENSIONS ARE IN INCHES

TOLERANCES ON FRACTIONS $\pm$ 1/64

NOTE: ALL CORNERS SHALL BE ROUNDED AND ALL BURRS SHALL BE REMOVED TEN-THOUSANDS RADIUS REQUIRED ON LEVER EDGES.

FIGURE 1. Inflating Assembly

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:33Z
Check the source to verify that this is the current version before use.

Custodians:
Air Force – 99

Reviewers:
DLA - CS
Air Force - 84

Preparing Activity:
Air Force - 82

(Project No. 4220-0443)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:33Z
Check the source to verify that this is the current version before use.