NOT MEASUREMENT SENSITIVE

MIL-I-3575/20B
15 February 1990
SUPERSEDING
MIL-I-3575/20A
31 March 1969

MILITARY SPECIFICATION SHEET

INSIGNIA, BRANCH OF SERVICE, OFFICERS, AIR DEFENSE ARTILLERY

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-3575:

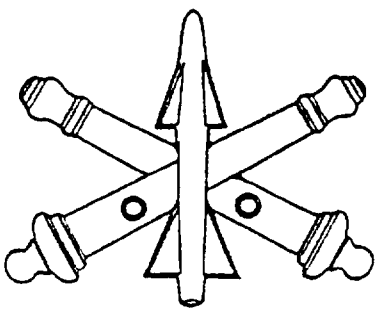

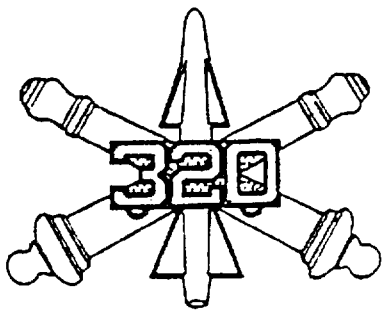

Dash No.:
-1: Regular
-2: Subdued
-3: Regimental (Regular
-4: Regimental (Subdued)

MATERIAL:
-1,-3: Red brass
-2,-4: Red brass or zinc aluminum

DIMENSIONS:
HEIGHT (Overall): 1-1/8 inch (2.86 cm) (REF)
THICKNESS (At thickest point): .135 inch ± .010 inch (0.342 cm) ± (0.025 cm)

FINISH:
-1,-3: Gold plated mirror-like polished finish
-2,-4: Dull flat black enamel

NOTES:
1. Attaching device shall be prong and clutch type. Prongs shall be located on the center line of either cannon, equidistant from each end and 1 inch apart.
2. The enamel for dash no. 2 and 4 shall match chip no. 37038 of FED-STD 595.
3. Number(s) for dash no. 3 and 4 shall be according to TIOH drawing B-2-5.
4. Number(s) for dash no. 3 shall be hard enameled and shall match TIOH color chip no. 1. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

Custodian:
Army-IH

Preparing Activity:
Army-IH

Review Activity:
DLA-CT

Project no. 8455-0447

User Activity:
Army-SM

AMSC N/A

FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil--Downloaded: 2026-10-16T18:19Z
Check the source to verify that this is the current version before use.