NOT MEASUREMENT SENSITIVE


MIL-I-3575/21D
23 May 1995
SUPERSEDING
MIL-I-3575/21C
14 August 1992

MILITARY SPECIFICATION SHEET

INSIGNIA, BRANCH OF SERVICE, OFFICERS, CORPS OF ENGINEERS, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-3575.

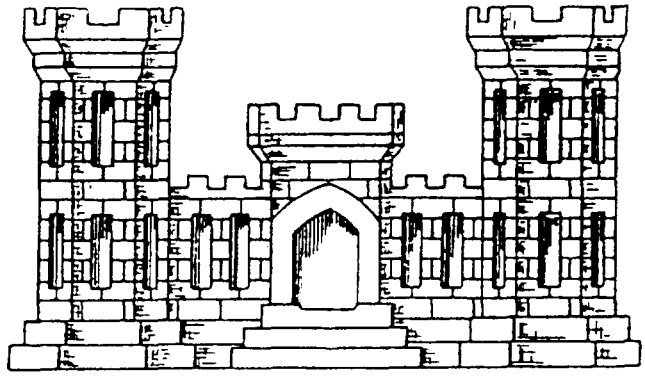

MATERIAL:
-1: Red Brass
-2: Red Brass or Zinc Aluminum

DASH NO.
-1: Regular
-2: Subdued

FINISH:
-1: Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.
-2: Dull Flat Black Enamel

DIMENSIONS:
HEIGHT (Overall): 11/16 inch (1.75 cm) (REF)
WIDTH (Overall): 1-1/8 inches (2.86 cm) (REF)
THICKNESS (At Thickest Point): 0.100 inch ± 0.005 inch (0.254 cm ± 0.012 cm)

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:19Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to measurements taken from the Government furnished hu or die.

2. Attaching device shall be prong and clutch type. Prongs shall be located on the horizontal center line, equidistant from each end and 13/16 inch ± 1/64 inch (2.06 cm ± 0.04 cm) apart.

3. The dull flat black enamel for Dash No. -2 shall match FED-STD-595 Chip No. 37038.

4. Insignia for Dash No. -1 may be manufactured for commercial sale only using 22 karat gold plate with nickel underplating and mirror-like polish which shall match TIOH Metal Finish Chip Number 9.

Custodian:
Army - IH

Review activities:
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0794)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:19Z
Check the source to verify that this is the current version before use.