MILITARY SPECIFICATION SHEET


Insignia, Branch of Service, Officers, QUARTERMASTER CORPS


This specification is mandatory for use by all Departments and Agencies of the Department of Defense. The complete requirements for procuring the item(s) described herein shall consist of this document and the issue in effect of Specification MIL-I-3575.





DASH NO.

-1: Regular
Ⓐ -2: Subdued

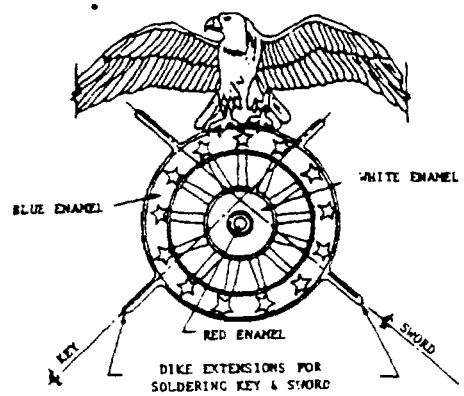

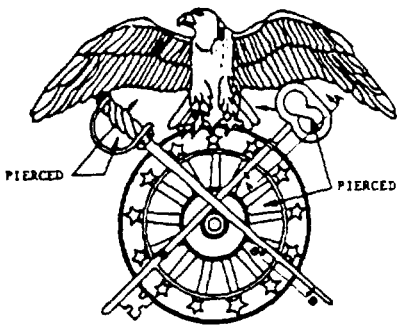



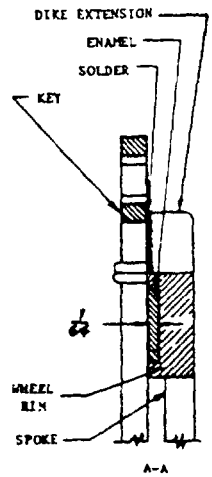

MATERIAL:

-1: GILDING METAL

Ⓐ -2: RED BRASS OR ALUMINUM

DIMENSIONS (INCHES):

HEIGHT (OVERALL): 3/4 (REF)

THICKNESS (AT THICKEST POINT):

WHEEL AND EAGLE: .060 + .010 - .000

KEY AND SWORD: .050 + .010 - .000

FINISH:

-1: WHEEL: ENAMELED. GOLD PLATED SATIN FINISH WITH POLISHED EDGES.
EAGLE: GOLD PLATED SATIN FINISH WITH POLISHED HIGHLIGHTS.
KEY AND SWORD: GOLD PLATED MIRROR-LIKE POLISHED FINISH.

Ⓐ -2: DULL FLAT BLACK ENAMEL FINISH OR ANODIZED AND DYED, AS APPLICABLE

NOTES: 1. KEY AND SWORD SHALL BE SOFT SOLDERED TO THE WHEEL AT EACH DIKE EXTENSION.

Ⓐ 2. ENAMEL AREAS FOR DASH NO. 1 SHALL BE AS INDICATED. THE ENAMEL COLORS SHALL MATCH THE ENAMEL COLORS ON THE STANDARD OR APPROVED SAMPLES AND SHALL CONFORM TO THE CHIP NUMBERS LISTED BELOW:

COLOR	CHIP NO.
RED	1
WHITE	28
BLUE	20

3. ATTACHING DEVICE SHALL BE PRONG AND CLUTCH TYPE. THE PRONGS SHALL BE LOCATED ON THE VERTICAL CENTER LINE 5/8 ± 1/64 INCH ON CENTERS.

CUSTODIAN:
ARMY - IH
REVIEW ACTIVITY:
OTHER - DP
USER ACTIVITY:
ARMY - SM

Project No. 8455-0129

PREPARING ACTIVITY:

THE INSTITUTE OF HERALDRY,
UNITED STATES ARMY

FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:20Z
Check the source to verify that this is the current version before use.