NOT MEASUREMENT SENSITIVE

MIL-I-3575/24C
15 February 1990
SUPERSEDING
MIL-I-3575/24B
31 March 1969

MILITARY SPECIFICATION SHEET

INSIGNIA, BRANCH OF SERVICE, OFFICERS, ADJUTANT GENERAL'S CORPS

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-3575.

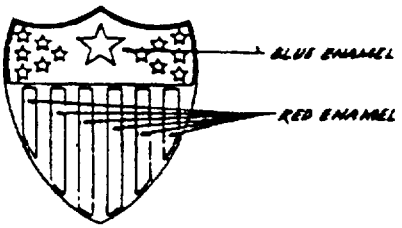

Dash no.:
-1: Regular
-2: Subdued

MATERIAL:
-1: Gilding metal
-2: Red brass or zinc aluminum

DIMENSIONS (inches):
HEIGHT (Overall): 1 inch (2.54 cm) (REF)
WIDTH (Overall): 7/8 inch (2.22 cm) (REF)
THICKNESS (At thickest point): .070 inch ± .005 inch (0.177 cm) ± (0.012 cm)

FINISH:
-1: Hard enameled, nickel plated, rhodium plated, matte finish
-2: Dull flat black enamel

NOTES:
1. Enamel areas for dash no. 1 shall be as indicated. The enamel colors shall match the TIOH color chip numbers listed below or the standard sample.

COLOR	CHIP NUMBER
Blue	18
Red	1

2. Attaching device shall be prong and clutch type. Prongs shall be located on the vertical centerline, equidistant from each end and 5/8 inch ± 1/64 inch (1.59 cm) ± (0.04 cm) apart.
3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of manufacturer.
4. The enamel for dash no. 2 shall match chip no. 37038 of FED-STD 595.

Custodian:
Army-IH

Preparing Activity:
Army-IH

Review Activity:
DLA-CT

Project no. 8455-0447

User Activity:
Army-SM

AMSC N/A

FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:20Z
Check the source to verify that this is the current version before use.