NOT MEASUREMENT SENSITIVE


MIL-I-3575/24E
14 September 1990
SUPERSEDING
MIL-I-3575/24D
26 June 1990

MILITARY SPECIFICATION SHEET

INSIGNIA, BRANCH OF SERVICE, OFFICERS, ADJUTANT GENERAL'S CORPS

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-3575.

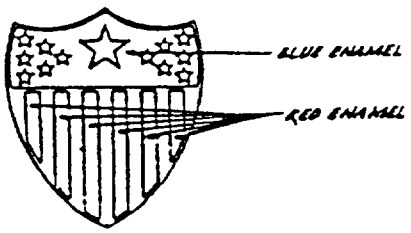

MATERIAL:
-1: Gilding metal
-2: Red brass or zinc aluminum

DASH NO:
-1: Regular
-2: Subdued

DIMENSIONS:
HEIGHT (Overall): 1 inch (2.54 cm) (REF)
WIDTH (Overall): 7/8 inch (2.22 cm) (REF)
THICKNESS (At thickest point): .070 inch ± .005 inch (0.177 cm ± 0.012 cm)

FINISH:
-1: Hard enameled, nickel plated, mirror like polished
-2: Dull flat black enamel

NOTES:
1. Attaching device shall be prong and clutch type. Prongs shall be located on the vertical centerline, equidistant from each end and 5/8 inch ± 1/64 inch (1.59 cm ± 0.04 cm) apart.

2. Enamel areas for Dash no. 1 shall be as indicated. The enamel colors shall match the TIOH color chip numbers listed below or the standard sample.

COLOR	CHIP NUMBER
Blue	18
Red	1

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of manufacturer.
4. The enamel for Dash no. 2 shall match chip no. 37038 of FED-STD 595.
5. Dash No. 1 may be rhodium plated mirror-like polished at option of manufacturer.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:20Z
Check the source to verify that this is the current version before use.

Custodian:
Army - IH

Review activity:
DLA - CT

User activity:
Army - SM

Preparing activity:
Army - IH

(Project no. 8455-0540)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:20Z
Check the source to verify that this is the current version before use.