NOT MEASUREMENT SENSITIVE


MIL-I-3575/24F
23 May 1995
SUPERSEDING
MIL-I-3575/24E
14 September 1990

MILITARY SPECIFICATION SHEET

INSIGNIA, BRANCH OF SERVICE, OFFICERS, ADJUTANT GENERAL'S CORPS, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-3575.

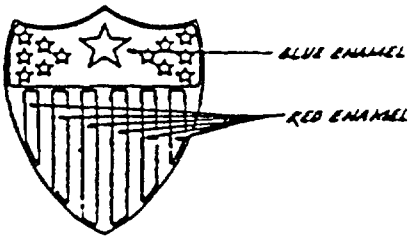

MATERIAL:
-1: Gilding Metal
-2: Red Brass or Zinc Aluminum

DASH NO.
-1: Regular
-2: Subdued

FINISH:
-1: Hard Enameled, Nickel Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16.
-2: Dull Flat Black Enamel.

DIMENSIONS:
HEIGHT (Overall): 1 inch (2.54 cm) (REF)
WIDTH (Overall): 7/8 inch (2.22 cm) (REF)
THICKNESS (At Thickest Point): 0.070 inch ± 0.005 inch (0.177 cm ± 0.012 cm)

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil - Downloaded: 2026-10-16T18:20Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. Enameled colors for Dash No. -1 shall be as indicated. The colors shall conform to the TIOH chip numbers listed below or the standard sample:

COLOR	CHIP NO.
Red	1
Blue	18

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

4. Attaching device shall be prong and clutch type. Prongs shall be located on the center vertical center line, equidistant from each end and 5/8 inch ± 1/64 inch (1.59 cm ± 0.04 cm) apart.

5. The dull flat black enamel for Dash No. -2 shall match FED-STD-595 Chip No. 37038.

Custodian:
Army - IH

Review activities:
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0794)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:20Z
Check the source to verify that this is the current version before use.