NOT MEASUREMENT SENSITIVE

MIL-I-3575/25B
15 February 1990
SUPERSEDING
MIL-I-3575/25A
31 MARCH 1969

MILITARY SPECIFICATION SHEET

INSIGNIA, BRANCH OF SERVICE, OFFICERS, ARMOR

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-3575.

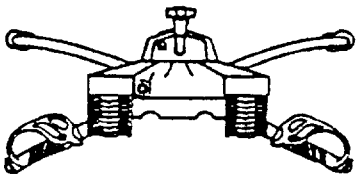

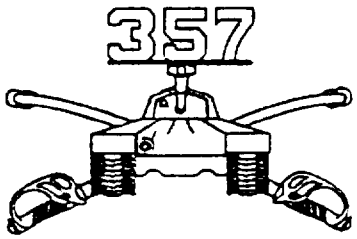

Dash no.:
-1: Regular
-2: Subdued
-3: Regimental (Regular)
-4: Regimental (Subdued)

MATERIAL:
-1,-3: Red brass
-2,-4: Red brass or zinc alumnium

DIMENSIONS:
HEIGHT: 13/16 inch (2.06 cm)
THICKNESS (At thickest point): .125 inch ± .005 inch (0.317 cm) ± (0.012 cm)

FINISH:
-1: Gold plated mirror-like polish
-2: Dull flat black enamel

NOTES:
1. Attaching device shall be prong and clutch type. Prongs shall be located on the horizontal center line, equidistant from each end and 3/4 inch ± 1/16 inch (1.91 cm) ± (0.16 cm) apart.
2. The enamel for dash no. 2 and 4 shall match chip no. 37038 of FED-STD 595.
3. Number for dash no. 3 and 4 shall be according to TIOH drawing B-2-9.

Custodian:
Army-IH

Preparing Activity:
Army-IH

Review Activity:
DLA-CT

Project no. 8445-0447

User Activity:
Army-SM

AMSC N/A

FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:20Z
Check the source to verify that this is the current version before use.