NOT MEASUREMENT SENSITIVE

MIL-I-3575/25C
30 January 1991
SUPERSEDING
MIL-I-3575/25B
15 February 1990

MILITARY SPECIFICATION SHEET

INSIGNIA, BRANCH OF SERVICE, OFFICERS, ARMOR

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-3575.

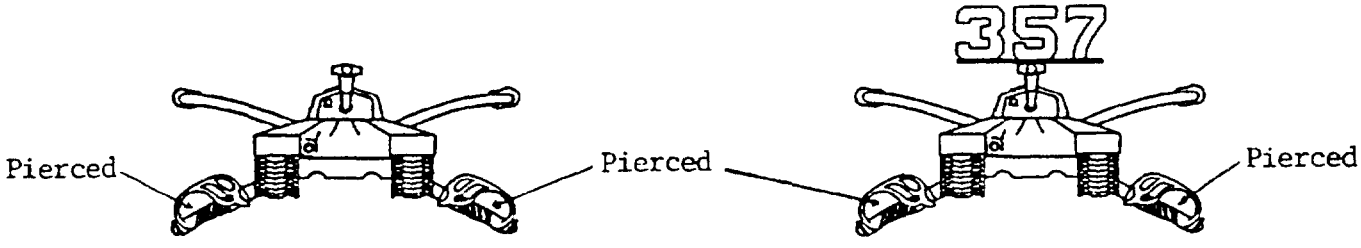

MATERIAL:
-1,-3: Red brass
-2,-4: Red brass or zinc aluminum

DASH NO:
-1: Regular
-2: Subdued
-3: Regimental (Regular)
-4: Regimental (Subdued)

DIMENSIONS:
HEIGHT: 13/16 inch (2.06 cm) (REF)
THICKNESS (At thickest point): .125 inch ± .005 inch (0.317 cm ± 0.012 cm)

FINISH:
-1,-3: Gold plated mirror-like polished
-2,-4: Dull flat black enamel

NOTES:
1. The attaching device shall be prong and clutch type. Prongs shall be located on the horizontal centerline, equidistance from each end and 3/4 inch ± 1/16 inch (1.91 cm ± 0.16 cm) apart.
2. The enamel for Dash No. 2 and 4 shall match Chip No. 37038 of FED-STD 595.
3. The numbers for Dash No. 3 and 4 shall be according to TIOH drawing B-2-9.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-0564)

AMSC N/A

FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:20Z
Check the source to verify that this is the current version before use.