MIL-I-3575 / 26A
31 March 1969
Superseding
3575/26
15 June 64

MILITARY SPECIFICATION SHEET

Insignia, Branch of Service, Officers, SIGNAL CORPS

This specification is mandatory for use by all Departments and Agencies of the Department of Defense. The complete requirements for procuring the item(s) described herein shall consist of this document and the issue in effect of Specification MIL-I-3575.



DASH NO.

-1: Regular
Ⓐ -2: Subdued

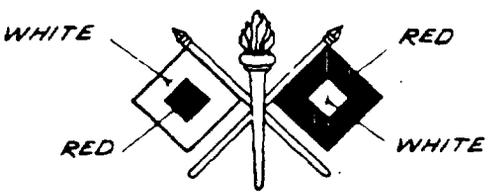

MATERIAL:

-1: GILDING METAL

Ⓐ -2: RED BRASS OR ALUMINUM

DIMENSIONS (INCHES):

HEIGHT (OVERALL): 7/8 (REF)

THICKNESS (ON FLAGS): .060 + .010
- .000

FINISH:

-1: ENAMELED. GOLD PLATED MIRROR-LIKE FINISH.

Ⓐ -2: DULL FLAT BLACK ENAMEL FINISH OR ANODIZED AND DYED, AS APPLICABLE

NOTES: 1. ENAMEL AREAS SHALL BE AS INDICATED. THE ENAMEL COLORS SHALL Ⓐ MATCH THE ENAMEL ON THE STANDARD OR APPROVED SAMPLE, AND SHALL CONFORM TO THE CHIP NUMBERS LISTED BELOW:

COLOR	CHIP NO.
RED	1
WHITE	28

2. ATTACHING DEVICE SHALL BE PRONG AND CLUTCH TYPE. PRONGS SHALL LOCATED ON THE HORIZONTAL CENTER LINE, EQUIDISTANT FROM EACH END AND 7/8 ± 1/64 INCH ON CENTERS.

CUSTODIANS:
ARMY - IN
REVIEW ACTIVITY:
OTHER - DP
USER ACTIVITY:
ARMY - SM

Project No. 8455-0129

PREPARING ACTIVITY:

THE INSTITUTE OF HERALDRY,
UNITED STATES ARMY

FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:21Z
Check the source to verify that this is the current version before use.