NOT MEASUREMENT SENSITIVE

MIL-I-3575/29C
15 February 1990
SUPERSEDING
MIL-I-3575/29B
9 September 1987

MILITARY SPECIFICATION SHEET

INSIGNIA, BRANCH OF SERVICE, OFFICERS, CHEMICAL CORPS

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-3575.

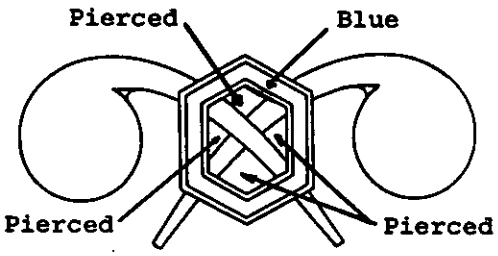

Dash no:
-1: Regular
-2: Subdued

MATERIAL:
-1: Gilding metal
-2: Red brass or zinc aluminum

DIMENSIONS:
HEIGHT (Benzene ring): 15/32 inch (1.19 cm) (REF)
WIDTH: 1-3/16 inch
THICKNESS (At thickest point): .080 inch + .005 inch -.000 (0.203 cm) + (0.012 cm) -.000

FINISH:
-1: Hard enameled, gold plated, mirror-like polished finish
-2: Dull flat black enamel

NOTES:
1. Blue enamel color for dash no. 1 shall match TIOH color chip no. 18 or the standard sample.
2. Attaching device shall be prong and clutch type. Prongs shall be located on the horizontal center line, equidistant from each end and 7/8 inch ± 1/64 inch (2.22 cm) ± (0.04 cm) apart.
3. The enamel for dash no. 2 shall match chip no. 37038 of FED-STD 595.
4. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel for dash no. 1 at the option of manufacturer.
5. Pierced areas shall be as indicated.

Custodian:
Army-IH

Preparing Activity:
Army-IH

Review Activity:
DLA-CT

Project no. 8455-0447

AMSC N/A

FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:21Z
Check the source to verify that this is the current version before use.