MILITARY SPECIFICATION

SURVIVAL KIT CONTAINER, AIRCRAFT SEAT, WITHOUT OXYGEN, GENERAL SPECIFICATION FOR

This specification is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the general requirements for an aircraft rigid seat survival kit (RSSK), containing survival equipment, for use by aircrewmen during and following emergency egress and on normal flight operations.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified, the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

L-P-383	Plastic Material, Polyester Resin, Glass Fiber Base, Low Pressure, Laminated
UU-T-81	Tag, Shipping and Stock
PPP-B-636	Box, Shipping, Fiberboard

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Engineering Specifications and Standards Department (Code 93), Naval Air Engineering Center, Lakehurst, NJ 08733, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:33Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS (Continued)

MILITARY

MIL-P-116	Preservation, Methods of
MIL-A-8625	Anodic Coatings, for Aluminum and Aluminum Alloys
MIL-S-8879	Screw Threads, Controlled Radius Root with Increased Minor Diameter, General Specification for
MIL-P-9400	Plastic Laminate and Sandwich Construction Parts, Aircraft Structural, Process Specification Requirements
MIL-S-18471	System, Aircrew Automated Escape Seat Type: General Design, Performance and Demonstration Specification for
MIL-H-19089	Harness, Integrated Parachute

STANDARDS

FEDERAL

FED-STD-H28/8	Dryseal American Standard Pipe Threads
FED-STD-406	Plastics, Methods of Testing
FED-STD-595	Colors

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-143	Standards and Specifications, Order of Precedence for the Selection of
MIL-STD-794	Parts and Equipment, Procedures for Packaging and Packing of
MIL-STD-810	Environmental Test Methods

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:33Z
Check the source to verify that this is the current version before use.

STANDARDS (Continued)

MILITARY (Continued)

MIL-STD-889	Dissimilar Metals
MS14174	Dropline, Rigid Seat Survival Kit
MS14175	Dropline/Boot Assembly, Rigid Seat Survival Kit

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein.

DRAWINGS

NAVAL AIR DEVELOPMENT CENTER

CL204D2	Bracket Assembly, AN/URT 33 Radio Beacon

NAVAL AIR SYSTEMS COMMAND

64A119D1	Container Lid Contour, Rigid Seat Survival Kit-All Types

PUBLICATIONS

NAVAL AIR ENGINEERING CENTER

ACEL Report No. 533	Anthropometry of Naval Aviators 1964

NAVAL AIR SYSTEMS COMMAND

NAVAIR 13-1-6.3	Aviation Crew Systems Manual - Seat Survival Kits

(Copies of specifications, standards, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.1.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Detail specification. The individual item requirements shall be as specified herein and in accordance with the applicable detail specification. In the event of any conflict between requirements of this specification and the detail specification, the latter shall govern. In

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:33Z
Check the source to verify that this is the current version before use.

the event of any conflict between the requirements of this specification, the detail specification and the applicable drawing, the applicable drawing shall govern.

3.2 Qualification. The rigid seat survival kit (RSSK) furnished under this specification shall be a product which is qualified for listing on the applicable Qualified Products List at the time set for opening of bids (see 4.3 and 6.3).

3.3 First article. When specified, a sample shall be subjected to first article inspection (see 4.4 and 6.4).

3.4 Selection of specifications and standards. Specifications and standards for necessary commodities and services not specified herein or in the applicable detail specifications shall be selected in accordance with MIL-STD-143.

3.5 Materials and components. Materials and components shall conform to applicable specifications and as specified herein and in the applicable detail specification. Materials which are not covered by applicable specifications or which are not specifically described herein, or in the applicable detail specification, shall be of the best quality, of the lightest practicable weight, and suitable for the purpose intended.

3.5.1 Metal parts. All metal parts shall be of a corrosion resistant material or treated in a manner to render them adequately resistant to corrosion.

3.5.1.1 Dissimilar metals. Dissimilar metals, such as defined by MIL-STD-889 shall not be used in intimate contact with each other unless suitably protected against electrolytic corrosion with protective coatings.

3.5.2 Nonmagnetic materials. Nonmagnetic materials shall be used for all components except where magnetic materials offer definite advantages.

3.5.3 Nonmetallic materials.

3.5.3.1 Fiberglass. Fiberglass, if used in the construction of the container, shall be manufactured in accordance with the requirements of MIL-P-9400. The fiberglass material shall conform to the requirements of L-P-383. The maximum resin content shall be 33 percent.

3.5.4 Protective treatment. When materials are used in the construction of the rigid seat survival kit that are subject to corrosion in oxygen, salt air, or other atmospheric conditions likely to occur during service usage, they shall be protected against such corrosion in a manner that shall in no way prevent compliance with the performance

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:33Z
Check the source to verify that this is the currentversion before use.

requirements of this specification. Any protective coating or finish that shall chip or scale during normal service life, or under extremes of atmospheric conditions, shall not be used.

3.5.4.1 Aluminum alloy parts. Where practicable, aluminum alloy parts shall be covered with an anodic film conforming to MIL-A-8625.

3.5.5 Fungus-proof materials. Materials which are nutrients for fungi shall not be used where it is practicable to avoid them. Where used and not hermetically sealed, they shall be treated with a fungicidal agent acceptable to the acquiring activity. However, if they will be used in a hermetically sealed enclosure, fungicidal treatment will not be necessary.

3.5.6 Standard parts. MS and AN standard parts shall be used where they suit the purpose, and shall be identified by their part number. In applications for which no suitable standard part is in effect on the date of invitation to bid, commercial parts may be used, provided they conform to the requirements of this specification.

3.5.7 Deleterious fumes. Materials or material treatments which shall cause toxic reaction in this application or transfer odor of an obnoxious or unpleasant type shall not be used.

3.5.8 Threads.

3.5.8.1 Screw threads. Screw threads shall conform to MIL-S-8879.

3.5.8.2 Pipe threads. Pipe threads shall conform to FED-STD-H28/8.

3.6 Design and construction. The rigid seat survival kit (RSSK) shall be designed and oriented in such a manner as to accommodate and provide a maximum of comfort, convenience, and freedom from hazard for the aircrewman (lower limit 3 percentile man, upper limit 98 percentile man, as specified in ACEL Report No. 533). The seat kit shall be designed or oriented in such a manner as to integrate satisfactorily with the airframe, seat, and aircrewman's personal equipment. The seat kit shall be designed to accommodate the applicable survival equipment within the configuration envelope. The seat kit shall be designed such that any hardware, handles, or other equipment protruding above the seat kit shall not cause pressure points or discomfort to the aircrewman during service usage, ejection, or possible crash loads. The container shall provide attachment to the aircrewman's torso harness such that it will stay with the aircrewman during ejection and fall. The seat kit when installed in the seat shall be compatible with the in-service adjustment of the seat and maintain the in-service pilot's eye reference level requirement and accommodate the 3 to 98 percentile aircrewman. As a design goal, in aircraft where the in-service adjustment of the ejection seat is physically limited by the anthropometry of the 3 or 98 percentile aircrewman, the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:33Z
Check the source to verify that this is the current version before use.

design of the seat kit shall compensate, where possible, the adjustment limitations on the ejection seat to allow for full-up and full-down adjustment of the seat to the eye reference level. Such a design would require the approval of the Naval Air Systems Command. The optimum design of the RSSK shall be such that the components affecting the ejection seat to RSSK and torso harness restraint subassembly shall conform to the general arrangement shown in figure 1.

3.6.1 Operation. The rigid seat survival kit shall be designed to allow the following operations:

a. Removal of the kit from the aircraft for servicing, packing, etc., without the use of special tools for detaching or attaching service lines from the aircraft to the kit and without repacking the container.

b. Normal abandonment of the aircraft after a flight, leaving the RSSK in the aircraft by actuating the quick release fittings of the restraint subassembly from the torso harness.

c. Ejection with subsequent manual release of the release handle causing the bottom container to separate and fall away from the contoured container lid secured to the aircrewman. The bottom container as it falls to full line stretch actuates the inflation system of the life raft causing it to inflate. The raft and survival equipment shall be secured to the aircrewman by means of the dropline which is connected to the container bottom and to the container lid. The manual release shall operate with an upward pull on the release handle releasing the container bottom from the container lid and aircrewman.

3.6.2 Components. Unless otherwise specified, the rigid seat survival kit shall consist of the following components:

a. Basic container.

b. Comfort cushion.

c. Ejection seat to RSSK and torso harness restraint subassembly.

d. Release handle and container locking mechanism.

e. Container dropline.

f. Radio beacon bracket.

3.6.2.1 Basic container. The container shall be designed to provide basically a cushioned seat conforming to the dimensions and general design as specified in the applicable detail specification. The container shall provide a maximum of interior space consistent with the limitations and requirements as specified herein and the physical limitations

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:33Z
Check the source to verify that this is the current version before use.

of the applicable ejection seat bucket. The basic container shall be composed of two parts consisting of the contoured container lid and a container bottom with means for locking and releasing the lid as specified in the detailed specification. The alignment of the fitting and mating surfaces shall be accurate to a degree that shall permit the proper function of the unit within the environmental conditions expected during the service life of the unit. The fit of the assembled components shall be such that upon actuation of the release handle, the container bottom shall separate and fall away easily from the contoured container lid.

3.6.2.1.1 Contoured container lid. The contoured container lid of the RSSK shall conform to the contour coordinates of Drawing 64A119D1 and the envelope dimensions and general design specified in the applicable detail specification.

3.6.2.1.2 Container bottom. The container bottom shall be designed to accommodate the life raft and applicable survival equipment within the maximum interior space consistent with configuration, strength, and other applicable requirements. The container bottom shall provide lid supports and shall be designed for attachment thereto of a release handle, locking mechanism, actuating cables, radio beacon bracket, and container dropline. The interior of the container bottom shall be free from any defect, burr or sharp edge, and the attachments for hardware components shall not damage or abrade the life raft or survival equipment under all conditions of operation.

3.6.2.1.3 Container locking mechanism. The container locking mechanism specified in the detail specification shall be incorporated for attaching together the upper and lower parts of the container. The mechanism shall not require special tools to open or close the kit and shall separate the container bottom from the lid when the release handle is actuated as specified in 3.6.2.4. The mechanism shall not permit inadvertent separation or separation of the two parts of the kit container when the container is subjected to the drop test, compression loads, ejection load, crash load and windblast load as specified herein. The container locking mechanism, including all actuating cables, shall be properly guarded to prevent inadvertent actuation or damage by or to the container contents. The container bottom shall incorporate inspection slots for visually determining locking of the lid to the bottom. The inspection slots shall be covered with suitable clear mylar tape or equivalent. The design of the mechanism shall prevent insertion of the handle without locking the container.

3.6.2.2 Comfort cushion. The comfort cushion shall conform to the design requirements of the applicable detail specification. The comfort cushion shall be attached to the container lid and shall be retained to the kit under all normal and emergency operations. The comfort cushion shall not cause interference with the aircraft control stick movement, or any operation or function of the survival kit or ejection seat.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:33Z
Check the source to verify that this is the current version before use.

3.6.2.3 Ejection seat to RSSK and torso harness subassembly. The RSSK shall be designed to include a torso restraint system which shall be compatible with MIL-H-19089 integrated torso suit harness, required personnel environmental protective and flight garments and survival equipment. The RSSK shall provide a means for securing the container to the aircrewman and, if applicable, the container to the seat, until separation or release functions are performed. The lap belt portion shall consist of webbing, non-slip adjustment hardware and other components as specified in figure 1. The restraint subassembly shall provide adjustment to accommodate 3 to 98 percentile aircrewman without inducing pressure points or causing interference with escape and survival functions.

3.6.2.4 Release handle and container locking mechanism. The basic container shall contain a release handle for manually releasing the locking mechanism and separating the bottom from the container lid. Unless otherwise specified, the release handle and container locking mechanism shall be such that the container shall unlock only when an upward pull is exerted on the handle. The design shall be such that a downward force on the handle shall not unlock the container. The container locking mechanism shall be designed to satisfy the requirements of 4.8.2. The force required to separate the handle from the container locking mechanism shall be a maximum of 30 pounds. Only a moderate steadily applied one-handed force shall be required to reinstall the handle and secure the kit during maintenance. The mechanism shall be designed to prevent insertion of the handle without locking the container.

3.6.2.4.1 Release handle. The release handle shall be configured as specified in the detail specification and shall be located on the container bottom on the right side. The handle shall not extend past the front of the container. It shall be in an easily accessible position to allow for actuation by the 3 to 98 percentile man while the man is suspended in the parachute harness following ejection. The location and design shall not cause uncomfortable pressure points.

3.6.2.5 Container dropline. The seat kit shall incorporate a dropline conforming to MS14174. Provisions shall be made for the attachment of the dropline between the container lid and the container bottom. Upon actuation of the release handle and opening of the kit, the dropline shall allow the container bottom to drop 25 feet, suspending the container bottom, the inflated life raft and survival equipment package from the container lid or harness which remains attached to the aircrewman. The dropline assembly incorporates provisions for attaching and inflating the one-man life raft. The provisions for life raft inflation shall be such that as the container bottom falls away from the lid and at full extension of the dropline, the attachment between the dropline and the life raft inflation system shall actuate the inflation system which shall inflate the life raft. The attachment shall be such that there shall not be any possibility of inadvertent inflation of the life raft due to vibration or movement during normal service use. The dropline shall be reeved as flat as possible into two boots as detailed

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:33Z
Check the source to verify that this is the current version before use.

in MS14175. The dropline shall not interfere with inflation or deployment of the raft from the container regardless of the method of folding the raft.

3.6.2.6 Radio beacon bracket. A radio beacon bracket manufactured in accordance with Drawing CL204D2 shall be installed in the container bottom as specified in the detail specification.

3.6.3 Design load requirements. The rigid seat survival kit including the equipment shall be capable of sustaining the following loads:

3.6.3.1 Static loads. The rigid seat survival kit containing the life raft and survival equipment package, closed and locked, shall be designed to sustain the specified loads without any evidence of material failure or malfunction of the container or installed equipment, except as indicated.

3.6.3.1.1 Basic container. The basic container of the rigid seat survival kit shall sustain the following uniform loads for a period of 2 seconds when tested as specified in Section 4:

a. Vertical compressive load - 7250 pounds proof

b. Fore and aft compressive load - 2000 pounds proof
3000 pounds ultimate

3.6.3.1.2 Container separation. The container assembly shall be designed to sustain a 700 pound load applied normal to the under side of the container top by a six inch diameter metal plate when tested as specified in 4.8.5.3.

3.6.3.1.3 Ejection seat to RSSK and torso harness restraint subassembly (as applicable). The restraint subassembly shall be designed to sustain all loads or combination of loads imposed by tests specified in Section 4 and pass all requirements specified in 3.7.

3.6.3.2 Crash loads. The rigid seat survival kit shall sustain the crash loads specified in 4.8.6.2 with an acceptable amount of structural container collapse. The acceptable level of structural container collapse shall be as determined by the testing facility with consideration given to the possible injurious effects the structural collapse could cause to the aircrewman and damage to the container contents. The ejection seat to RSSK and torso harness subassembly shall not fail and the container shall separate upon actuation of the release handle and shall conform to the requirements of 4.8.3.1, 3.7.5.2 and 4.8.5.1.1.

3.6.3.3 Ejection loads. The rigid seat survival kit shall be designed to sustain the loads imposed by the ejection load test specified in 4.8.6.1, and shall meet the specified requirements of 3.7.5.1.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:33Z
Check the source to verify that this is the current version before use.

3.6.3.4 Windblast loads. The rigid seat survival kit shall sustain the windblast loads specified in the detail specification.

3.6.4 Compatibility requirement. The rigid seat survival kit shall be compatible with the ejection seat for which it is designed and shall maintain the in-service adjustment of the seat and maintain the in-service pilot's eye reference level accommodating the 3 to 98 percentile aircrewman.

3.7 Performance.

3.7.1 Release handle and container mechanism. The container, when tested as specified in 4.8.2, shall remain locked when a downward force is applied to the release handle. The container shall unlock when the upward pull of 20 ± 10 pounds is applied to the handle. After unlocking, a pull of 30 pounds maximum shall be required to detach the handle from the container. The handle shall be reinstalled, requiring only a moderate one-handed force to lock the container. Insertion of the handle shall not be possible without locking the container.

3.7.2 Kit actuation. The RSSK, when tested as specified in 4.8.3, shall unlock, characterized by the release of the container locking mechanism and separation of container bottom and contoured container lid. The dropline shall sustain the loads imposed by the container bottom as it reaches its full extent without failure or damage.

3.7.2.1 Bench test. The RSSK, when tested as specified in 4.8.3.1, shall unlock so that the container halves can be separated.

3.7.3 Drop test. The RSSK, when tested as specified in 4.8.4, shall show no evidence of distortion or damage to the restraint webbing, related hardware, or installed equipment.

3.7.4 Static loads.

3.7.4.1 Condition I. The RSSK, when tested as specified in 4.8.5.1, shall sustain the loads specified without any evidence of material failure or malfunction of the container or installed equipment. Any damage to the restraint system or slippage of adjustments shall be cause for rejection. Any damage to the stitching/webbing shall be evaluated by the activity responsible for coordinating tests applying the criteria set forth in table I.

3.7.4.1.1 Condition II. The RSSK containing the life raft and survival equipment package, closed and locked, when tested as specified in 4.8.5.1.1, shall pass the requirements specified in 3.7.4.1.

3.7.4.2 Compression tests.

3.7.4.2.1 Vertical. The RSSK, when tested as specified in 4.8.5.2.1, shall not show any evidence of cracking or delamination. Slight distortion, warping, etc. shall be acceptable.

Source: https://assist.dla.mil Downloaded: 2026-10-26T04:33Z
Check the source to verify that this is the current version before use.

3.7.4.2.2 Compression strength (fore and aft). The RSSK, when tested as specified in 4.8.5.2.2, shall not show any evidence of distortion or damage to the container or installed equipment when the 2000 pound proof load is relieved. After the 3000 pound ultimate load has been applied and removed, the kit shall not show any cracking or delamination. Slight distortion or warping shall be acceptable.

3.7.4.3 Container separation. The RSSK, when tested as specified in 4.8.5.3, shall show no failure of the container latches or container separation of more than 1/16 inch under load, or any permanent deformation of the closure after the load is released.

3.7.5 Dynamic loads.

3.7.5.1 Ejection load. The RSSK, when tested as specified in 4.8.6.1, shall show no evidence of any cracking, distortion, slippage or damage to the restraint.

3.7.5.2 Crash load. The RSSK, when tested as specified in 4.8.6.2, shall sustain the loads with an acceptable amount of structural container collapse. The acceptable level of structural container collapse shall be as determined by the testing facility with consideration given to the possible injurious effects the structural collapse could cause to the aircrewman and damage to the container contents. The ejection seat to RSSK and torso harness subassembly shall not show any sign of material failure or malfunction, and the container shall separate upon actuation of the release handle. Any damage to the stitching/webbing shall be evaluated by the activity responsible for coordinating tests.

3.7.6 Windblast load. The RSSK, when tested as specified in 4.8.7, shall sustain the windblast loads as specified in the applicable detail specification.

3.7.7 Environmental tests.

3.7.7.1 Vibration. The RSSK, when tested as specified in 4.8.8.1, shall not have sustained any damage or malfunction.

3.7.7.2 Extreme temperatures.

3.7.7.2.1 High temperature operation. The RSSK, when tested as specified in 4.8.8.2.1, shall not sustain any damage or malfunction.

3.7.7.2.2 Low temperature operation. The RSSK, when tested as specified in 4.8.8.2.2, shall not sustain any damage or malfunction.

3.7.7.3 Humidity. The RSSK, when tested as specified in 4.8.8.3, shall not sustain any damage or malfunction.

3.7.7.4 Salt fog. The RSSK, when tested as specified in 4.8.8.4, shall not sustain any damage or malfunction.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:33Z
Check the source to verify that this is the current version before use.

3.7.7.5 Dust (fine sand). The RSSK, when tested as specified in 4.8.8.5, shall not sustain any damage or malfunction.

3.7.8 Resin content. The fiberglass test slabs, when tested as specified in 4.8.9, shall exhibit properties of resin content which shall not exceed a maximum of 33 percent.

3.8 Compatibility. The rigid seat survival kit shall be compatible with the ejection seat for which it is designed and shall maintain the in-service adjustment of the seat and maintain the in-service pilot's eye reference level accommodating the 3 to 98 percentile aircrewman.

3.9 Size. The rigid seat survival kit shall conform to the dimensions specified in the applicable detail specification.

3.10 Weight. The weight of the rigid seat survival kit shall be as specified in the applicable detail specification.

3.11 Interchangeability. All parts of the rigid seat survival kit having the same manufacturer's part number shall be completely interchangeable with respect to installation and performance. Seat kits manufactured with the same manufacturer's part number shall have interchangeability between container bottoms, contoured lids and comfort cushions.

3.12 Maintenance. The design of the rigid seat survival kit shall be such as to be easily disassembled and reassembled for service and maintenance of the components without the use of special tools.

3.13 Color. The basic container color shall be green approximately matching color number 34128 of FED-STD-595. Color of anodizing shall approximate the aforesaid green on all aluminum components on the outside of the container, except tubing and the operating hardware which may be natural. Slight color deviation from the aforesaid green on fabric components is permissible between mill runs.

3.14 Identification and marking. Identification markings shall conform to MIL-STD-130. Identification plates shall be securely attached and shall contain the following information:

Rigid Seat Survival Kit (dash type)
Specification
Manufacturer's part number
Manufacturer's serial number
Date of manufacture
National stock number
Contract number
Serial number (see 6.2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:33Z
Check the source to verify that this is the current version before use.

3.15 Warning tag. A red warning tag conforming to UU-T-81, type B, not smaller than size 4 and strung with twine, shall be securely tied to the restraint subassembly of the RSSK. The tag shall contain the following information:

WARNING

The rigid seat survival kit shall not be used until subjected to the inspection requirements of NAVAIR 13-1-6.3, Aviation Crew Systems Manual.

3.16 Workmanship. Fabrication shall be in accordance with the highest standards of commercial and aircraft practices. The non-fibrous components shall not be misaligned or distorted nor contain any corrosion, scale, pit, dent, crack, nick, burr, sliver, or sharp or rough edge. The fibrous components shall not contain any tear, cut, mend, needle chew, burn, spot, stain, nor any portion stiffened or scorched by any process of manufacture. The kit shall not contain any non-specified hole and drawn or molded parts shall be of equal thickness throughout, except where increase strength is required; however, laminated glass fiber reinforced material shall have no excess resin buildup or inconsistency of glass fibers in corner areas. Particular attention shall be given to alignment of parts and tightness of assemblies. Because of the emergency and life support use of these kits, the importance of providing a product of uniformly excellent quality cannot be overemphasized. The kits shall be uniform in quality and shall be free from irregularities or defects which could adversely affect performance, reliability, or durability. The kits shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the acceptance criteria established herein.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection. The examination and testing of the rigid seat survival kit shall be classified as follows:

a. Qualification inspection. Qualification inspection consists of examinations and tests performed on rigid seat survival kits which are submitted for approval as qualified products (see 4.3).

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:33Z
Check the source to verify that this is the currentversion before use.

b. First article inspection. First article inspection consists of examinations and tests performed on samples which are representative of the production item after award of a contract to determine that the production item conforms to the requirements of this specification (see 4.4).

c. Quality conformance inspection. Quality conformance inspection consists of examinations and tests performed on individual products or lots to determine conformance of the products or lots with the requirements set forth in this specification (see 4.5).

d. Quality conformance verification inspection. Quality conformance verification inspection consists of examinations and tests performed on individual products or lots to verify conformance of the products or lots with the requirements set forth in this specification (see 4.6).

4.3 Qualification inspection. The qualification inspection of the rigid seat survival kits shall consist of examinations and tests for all of the requirements of this specification and the applicable detail specification.

4.3.1 Qualification samples. Unless otherwise specified in the applicable detail specification, the qualification samples shall consist of five complete rigid seat survival kits of each manufacturer's part number submitted for qualification testing. The qualification samples shall be forwarded to the test facility set forth in the letter of authorization to submit samples (see 6.3). The samples shall be plainly identified by securely attached durable tags marked with the following information:

Samples for qualification inspection
Rigid Seat Survival Kit Type
Manufacturer's designation and number
Name of manufacturer
Submitted by (name) (date) for qualification in accordance with the requirements of MIL-S-81040C(AS) under Authorization (reference authorizing letter and number) (see 6.3).

Unless otherwise directed, a single complete kit, complying in all respects to the specification requirements herein, may be submitted prior to the submittal of the other samples required. This kit shall be forwarded to the Commander, Naval Air Development Center, Warminster, PA 18974, Code 6031, and will be subjected to the dynamic crash load test, 4.8.7. Upon successful completion of this test, the manufacturer will be notified and the additional samples shall be submitted for the completion of the required qualification tests. There shall be no changes in the design construction or manufacturing processes between this kit and subsequent samples.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:33Z
Check the source to verify that this is the current version before use.

4.3.2 Retention. The retention of qualification shall consist of periodic verification to determine compliance of the qualified RSSK with the requirements of this specification. The time and method of periodic verification shall be specified by the activity responsible for the Qualified Products List and shall be included in the Notice of Qualification letter.

4.4 First article. The first article inspection of the rigid seat survival kits shall consist of those examinations and tests deemed necessary by the inspection facility to determine compliance with the requirements of this specification and applicable detail specification.

4.4.1 First article samples. Unless otherwise specified, as soon as practicable after award of the contract or order, the manufacturer shall submit five complete kits, and two each test slab samples, one from the contoured lid and one from the kit container bottom to determine the resin content. The samples shall be representative of the construction, workmanship, components and materials to be used during production. Two complete kit samples shall be forwarded to the Commander, Naval Air Development Center, Warminster, PA 18974, Code 6031 and will be subjected to the dynamic ejection load test, 4.8.6.1, and the dynamic crash load test, 4.8.6.2. Three remaining samples shall be furnished to the Government as directed by the contracting officer (see 6.2.1e). When a manufacturer is in continuous production of these rigid seat survival kits from contract to contract, submission of further first article samples may be waived at the discretion of the acquiring activity (see 6.2.1d). Approval of the first article samples or the waiving of first article inspection does not preclude the requirements of submitting to the quality conformance inspection, 4.5. The samples shall be plainly identified by securely attached durable tags marked with the following information:

Samples submitted by (name) (date) for first article inspection in accordance with the requirements of MIL-S-81040C(AS) under Contract No.

4.4.2 First article information. Upon completion of the first article inspection program, recommendations and comments pertinent for use in monitoring production shall be forwarded by the Government activity responsible for conducting the inspection program (see 6.2.1e) to the contracting officer. One approved rigid seat survival kit shall be returned to the manufacturer for use in monitoring production. The other rigid seat survival kits shall be consumed or destroyed in the first article inspection and shall not be considered as part of the quantity to be delivered under contract.

4.5 Quality conformance inspection. The sampling and inspection levels shall conform to MIL-STD-105. Quality conformance inspection shall consist of the examinations and tests specified in table I and 4.6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:33Z
Check the source to verify that this is the current version before use.

4.5.1 Sampling.

4.5.1.1 Inspection lot.

4.5.1.1.1 Rigid seat survival kit. An inspection lot size shall be expressed in units of one rigid seat survival kit, complete with all components. An inspection lot shall consist of rigid seat survival kits, complete with all components made under identically the same conditions and from the same materials and components. The sample unit shall be one rigid seat survival kit complete with all components.

4.5.1.1.2 Packaging. An inspection lot shall be expressed in units of one fully prepared shipping container, containing rigid seat survival kits. An inspection lot shall consist of shipping containers fully prepared for delivery from essentially the same materials and components. The sample unit shall be one shipping container, containing rigid seat survival kits, fully prepared for delivery with the exception that it need not be sealed.

4.5.1.2 Sampling for tests and examinations of the rigid seat survival kit. The sampling size, acceptance criteria, tests, and examinations required for the rigid seat survival kits shall be as specified in table I.

4.6 Quality conformance verification inspection. Upon completion of the tests and examinations specified in 4.5.1.2, a random sample shall be selected from each lot in accordance with MIL-STD-105, Inspection Level S-3 by the cognizant Government quality assurance representative/specialist (see 6.2.1k). The sample size shall be based only on the applicable size code letter corresponding to Inspection Level S-3. Each kit selected as a sample unit shall be identified by its assigned serial number (see 6.2.1g) and shall be forwarded to the laboratory specified in the acquisition document (see 6.2.1f). Each rigid seat survival kit selected as a sample shall be subjected to the following examinations and tests:

Visual examination	4.8.1.1
Release handle test	4.8.2
Kit actuation test (bench)	4.8.4.1

The serial numbers of the units in the lot, represented by the sample units, shall be furnished to the laboratory. A rejected lot shall not be resubmitted without the approval of the contracting officer (see 6.5). Upon completion of the tests and examinations, the laboratory shall return the seat kit samples to the manufacturer at the manufacturer's expense. The Government activity responsible for conducting the inspection program (see 6.2.1f) shall report the results of tests and examinations to the designated inspection acceptance office specified in the procurement document. Final acceptance of the lot from which the samples were selected shall be based upon successful completion of the inspection program by the cognizant Government quality assurance

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:33Z
Check the source to verify that this is the current version before use.

representative/ specialist applying the applicable acceptance criteria specified in table I.

4.7 Test conditions.

4.7.1 Atmospheric conditions. Unless otherwise specified, tests shall be conducted at local ambient temperatures and barometric pressure, and corrections shall be made to provide agreement with the temperature and pressure calibration of the instruments. Test data provided by any instrument not calibrated to Standard Temperature and Pressure (STP) conditions shall be corrected to determine STP requirements. The STP conditions are 29.92 inches of mercury (101.3 kPa) and 70°F (21.1°C).

4.8 Inspection methods.

4.8.1 Visual examination.

4.8.1.1 Rigid seat survival kit. Every RSSK shall be examined visually and dimensionally to determine conformance to all the requirements of this specification and applicable drawings. The classification of defects, table II, shall be used to classify the defects found.

4.8.1.2 Packaging. Each of the fully prepared shipping containers, containing RSSKs selected as a sample unit from the lot, shall be examined to determine that the packaging, packing, and marking conform to this specification. The classification of defects, table III, shall be used to enumerate the defects found.

4.8.2 Release handle and container locking mechanism. A downward force of 50 $\pm$ 1 pounds shall be applied to the release handle of the RSSK. A force of 20 $\pm$ 10 pounds shall then be applied upward on the handle. The force shall be applied perpendicular to the base of the handle at a point between 4 and 4-1/4 inches forward of the fulcrum point of the handle. After unlocking, the handle shall be continuously pulled until it detaches from the container. The container shall pass the requirements specified in 3.7.1.

4.8.3 Kit actuation. A human subject or test dummy, fitted with the proper integrated torso harness and a survival kit, shall be suspended at a point approximately 35 feet above the floor to simulate actual parachute descent. The release handle shall be actuated with a single sustained pull. For convenience during this test, it shall not be necessary to inflate the life raft as the container bottom falls away from the lid. The RSSK shall pass the requirements specified in 3.7.2.

4.8.3.1 Bench test. An actuation check shall be performed by pulling upward on the release handle (see 4.8.2). The RSSK shall pass the requirements specified in 3.7.2.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:33Z
Check the source to verify that this is the current version before use.

4.8.4 Drop test. A test dummy shall be fitted with an integrated torso harness and with a rigid seat survival kit. The weight of the kit shall be as specified in the applicable detail specification. The kit shall be attached to the torso harness by the RSSK to the torso harness restraint subassembly. This configuration shall be subjected to simulated parachute opening shock by being dropped to the end of a suspension assembly or drop cable of such height and elasticity as to produce 25 plus 5, minus 0, g force as recorded in the dummy. The RSSK shall pass the requirements specified in 3.7.3. The RSSK shall then be subjected to and pass the tests of 4.8.2 and 4.8.3.1.

4.8.5 Static loads. The RSSK shall be subjected to the static loads test of 4.8.5.1 or 4.8.5.1.1, as specified in the applicable detail specification.

4.8.5.1 Condition I. A load of 2000 pounds ± 5 percent shall be applied as follows: The RSSK shall be restrained in a static load fixture simulating a 50th percentile buttocks. The 2000 pound load shall then be applied to the seat kit lid through the torso harness attachments. This load should be distributed equally to both sides of the lid for a period of 5 seconds. After maintaining this load, the RSSK shall pass the requirements specified in 3.7.4.1. The RSSK shall then be subjected to and pass the requirements of 4.8.2 and 4.8.3.1.

4.8.5.1.1 Condition II. The container assembly shall be suspended between the torso harness attachment hardware and the ejection seat hardware of the seat to RSSK and torso harness restraint subassembly. A collective load of 6500 pounds ± 5 percent shall be applied at the rate of 4 ± 1/2 inches per minute and maintained for five seconds. After maintaining this load, the RSSK shall pass the requirements specified in 3.7.4.1.1.

4.8.5.2 Compression tests. Compression tests shall be conducted for vertical loading as well as fore and aft loading on the container. In each case, a proof load and/or an ultimate load shall be applied. The proof load shall be accomplished prior to the ultimate load test. The cushion shall be removed from the container for these tests. The applied loads shall be within ± 2 percent of the specified values.

4.8.5.2.1 Vertical. The compression test sample shall be placed horizontally on a compression tester so that the load shall be applied vertically into the lid. A rubber block, having a minimum thickness of one inch, a Shore "A" durometer hardness of approximately 60 and conforming to the contour of the entire container lid, shall be used. A compression load if 7250 pounds proof shall be applied vertically and downward for a period of 2 seconds, compressing the survival unit between the base of the test stand and the force apparatus. After the 7250 pound load has been relieved, the kit shall be examined and shall pass the requirements specified in 3.7.4.2.1. The kit shall then be subjected to and pass the requirements of 4.8.2 and 4.8.3.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:33Z
Check the source to verify that this is the current version before use.

4.8.5.2.2 Compression strength (fore and aft). The compression test sample shall be placed on the compression tester so that the bottom of the kit is vertical. Rubber blocks which conform to the entire front and rear faces of the container shall be used to distribute the load. The rubber blocks shall be a minimum thickness of one inch and have a Shore "A" durometer hardness of approximately 60. Compression loads of 2000 pounds proof and 3000 pounds ultimate shall be applied vertically and downward for a period of 2 seconds, compressing the container between the base of the test stand and the force apparatus. After the 2000 pound proof load is relieved, the RSSK shall pass the requirements specified in 3.7.4.2.2. The kit shall then be subjected to and pass the requirements of 4.8.2 and 4.8.3.1. After the 3000 pound ultimate load has been applied and removed, the kit shall be examined and shall pass the requirements specified in 3.7.4.2.2.

4.8.5.3 Container separation. Unless otherwise specified in the applicable detail specification, the container assembly shall be subjected to a 700 pound load applied normal to the underside of the container top at the center by a six inch diameter metal plate. The test shall be repeated with the load applied 3 inches to the right of center and 3 inches to the left of center. The container shall pass the requirements specified in 3.7.4.3. The kit shall then be subjected to and pass the requirements of 4.8.2 and 4.8.3.1.

4.8.6 Dynamic loads.

4.8.6.1 Ejection load. The ejection test shall be conducted under simulated emergency conditions on an ejection tower. An anthropomorphic dummy weighing 250 pounds shall be placed on the rigid seat survival kit, containing the raft and survival equipment, and ejected at a maximum acceleration of 20 $\pm$ 1 g and rate of change acceleration not to exceed 250 g per second. Ejection phenomenon shall not exceed 200 milliseconds. The Naval Air Development Center, Code 603, has an ejection tower which is capable of producing this type of ejection load. The RSSK shall pass the requirements specified in 3.7.5.1. The kit shall then be subjected to and pass the requirements of 4.8.2 and 4.8.3.1.

4.8.6.2 Crash load. The rigid seat survival kit, containing the raft and survival equipment, shall be subjected to crash type loads while supporting a 250 pound anthropomorphic dummy in the ejection seat. The minimum acceleration load and rate of change of acceleration shall be as described in figure 2. This test shall be conducted with the load applied through the kit lid at any and all angles between "Z" axis (downward) forward and aft to the "X" axis and within 20° of the "X-Z" plane as depicted in figure 2. Attitude shall be as described in the applicable detail specification. The RSSK shall pass the requirements specified in 3.7.5.2. The kit shall then be subjected to and pass the requirements of 4.8.2 and 4.8.3.1.

4.8.7 Windblast load. The RSSK shall be subjected to windblast loading as specified in the applicable detail specification

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:33Z
Check the source to verify that this is the current version before use.

and shall pass the requirements of 3.7.6. The RSSK shall then be subjected to and shall pass the requirements of 4.8.2 and 4.8.3.1.

4.8.8 Environmental tests.

4.8.8.1 Vibration. The RSSK shall be mounted on the vibration test stand in a position similar to the normal aircraft mounting. The RSSK shall be subjected to the vibration test specified in MIL-STD-810, Method 514.2, Procedure IA. The test conditions shall be in conjunction with MIL-S-18471. The RSSK shall be inspected and shall pass the requirements specified in 3.7.7.1. After completion of each axis test, the kit shall be subjected to and pass the requirements of 4.8.2 and 4.8.3.1.

4.8.8.2 Extreme temperatures.

4.8.8.2.1 High temperature operation. The RSSK shall be placed in a temperature chamber and subjected to 160 ± 3.6°F for a period of 3 hours. Immediately upon removal from the chamber, the kit shall be subjected to and pass the requirements of 4.8.2 and 4.8.3.1. The RSSK shall pass the requirements specified in 3.7.7.2.1.

4.8.8.2.2 Low temperature operation. The RSSK shall be placed in a temperature chamber and subjected to -65 ± 3.6°F for a period of 3 hours. Immediately upon removal from the chamber, the kit shall be subjected to and pass the requirements of 4.8.2 and 4.8.3.1. The RSSK shall pass the requirements specified in 3.7.7.2.2.

4.8.8.3 Humidity. The RSSK shall be subjected to the humidity test in accordance with MIL-STD-810, method 507.1-1, procedure I. The kit shall then be subjected to and pass the requirements of 4.8.2 and 4.8.3.1. The RSSK shall pass the requirements specified in 3.7.7.3.

4.8.8.4 Salt fog. The RSSK shall be subjected to the salt fog test in accordance with MIL-STD-810, method 509.1, procedure I, and shall be exposed to the salt environment for not less than 120 hours. The kit shall then be subjected to and pass the requirements of 4.8.2 and 4.8.3.1. The RSSK shall pass the requirements specified in 3.7.7.4.

4.8.8.5 Dust (fine sand). The RSSK shall be subjected to the dust (fine sand) test in accordance with MIL-STD-810, method 510.1, procedure I. The kit shall then be subjected to and pass the requirements of 4.8.2 and 4.8.3.1. The RSSK shall pass the requirements specified in 3.7.7.5.

4.8.9 Resin content. Two test slab samples, one from the kit contoured lid and the other from the kit container bottom, shall be used to determine the resin content of the rigid seat survival kit container. The location, where the samples shall be taken, shall be at the discretion of the testing activity and shall be consistent with the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:33Z
Check the source to verify that this is the current version before use.

size of the specimens required by FED-STD-406. The test slabs shall be tested in accordance with FED-STD-406, method 7061 and shall exhibit the resin content specified in 3.7.8.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or C, as specified (see 6.2.1h).

5.1.1 Level A or C. The rigid seat survival kits shall be packaged in accordance with MIL-STD-794. For level A packaging, the kits shall be packaged in accordance with MIL-P-116, method III, utilizing containers conforming to PPP-B-636, type I or II, class 2, grade 3.

5.2 Packing. The rigid seat survival kit shall be packed in accordance with MIL-STD-794, level A, B or C, as specified (see 6.2.1h). As far as practicable, exterior containers shall be of uniform size and shape and be of minimum cube and tare consistent with the protection required.

5.3 Marking. Interior and exterior containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The rigid seat survival kits are intended for use with the applicable ejection seat. The RSSK is used in the ejection seat to reduce the tendency of tumbling during the propulsion phase of the ejection by limiting the center of gravity travel of the seat-man combination within the resultant thrust vector of the propulsion system.

6.2 Ordering data.

6.2.1 Acquisition requirements. Acquisition documents shall specify the following:

a. Title, number, and date of this specification.

b. Title, number, and date of the applicable detail specification and the applicable type and style.

c. Quantity required.

d. Whether first article inspection is waived (see 4.4.1).

e. Name and address of the first article laboratory (see 4.4.1), including the name and address of the Government activity responsible for conducting the first article inspection program (see 4.4.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:33Z
Check the source to verify that this is the current version before use.

f. Name and address of the quality conformance verification inspection laboratory (see 4.6), including the name and address of the Government activity responsible for conducting the quality conformance verification inspection program.

g. Issuance of block of serial numbers to cover quantity of kits to be purchased (see 4.6).

h. Selection of applicable levels of preservation, packaging, and packing (see 5.1 and 5.2).

i. Whether any special markings are required.

j. Items of data required (see 6.2.2).

k. Selection of samples to be performed by the cognizant Government quality assurance representative/specialist (see 4.6).

6.2.2 Data requirements. When this specification is used in an acquisition which incorporates a DD Form 1423, Contract Data Requirements List (CDRL), the data requirements identified below shall be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with the approved CDRL incorporated into the contract. When the provisions of DAR 7-104.9(n)(2) are invoked and the DD Form 1423 is not used, the data specified below shall be delivered by the contractor in accordance with the contract or purchase order requirements. Deliverable data required by this specification is cited in the following paragraph:

Paragraph	Data requirement	Applicable DID
4.4.1	First Article Inspection Reports	DI-T-5329 - Inspection Test Reports

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time set for opening of bids, qualified for inclusion in the applicable Qualified Products List whether or not such products have actually been so listed by that date. The attention of contractors is called to this requirement, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they might be eligible to be awarded contracts or orders for the products covered by this specification. The activity responsible for the Qualified Products List is the Commander, Naval Air Systems Command, Department of the Navy, Washington, DC 20360; however, authorization for qualification of products shall be obtained from the Commanding Officer, Naval Air Development Center, Warminster, PA 18974, (Code 6031). Prior to submission of the samples for qualification inspection, the manufacturer shall submit a request to the Naval Air

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:33Z
Check the source to verify that this is the current version before use.

Development Center (Code 6031) indicating a date on which the samples can be forwarded and also request an authorization number to accompany the samples.

6.4 First article. When a first article is required, the rigid seat survival kit shall be tested and should be a preproduction sample. The contracting officer should include specific instructions for examinations, tests and approval of the first article.

6.5 Laboratory information. The successful bidder will be furnished with the name of the quality conformance verification inspection laboratory. The costs of the tests and examinations on samples initially submitted from a lot, as required by 4.6, shall be borne by the Government. Samples from a rejected lot shall not be resubmitted for tests and examinations, as required by 4.6, without the approval of the contracting officer. The costs of the tests and examinations on samples resubmitted from a reworked lot or from a new lot which is necessitated by the rejection of a previous lot shall be borne by the manufacturer.

6.6 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Preparing activity:
Navy - AS
(Project No. 1660-N464)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:33Z
Check the source to verify that this is the current version before use.

TABLE I. Sample size, acceptance criteria, tests, and examinations of the rigid seat survival kit.

Inspection	Method paragraph	Sample size	Acceptance criteria
Visual examination	4.8.1.1	Every rigid seat survival kit for critical defects. Inspection Level II for minor defects	Reject all units with any critical defect and an acceptable quality level of 2.5 defects per hundred units for minor defects
Release handle test	4.8.2	Inspection Level S-4 1/	Acceptance number zero rejection number 1
Kit actuation test (bench)	4.8.3.1	Inspection Level S-4 1/	Acceptance number zero rejection number 1
Packaging	4.8.1.2	Inspection Level S-2	Total acceptable quality level of 2.5 defects per hundred units

1/ The sample size shall be based only on the applicable sample size code letter corresponding to the specified inspection level of MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:33Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of defects for visual examination of the rigid seat survival kit.

CRITICAL	MINOR
1. Any material imperfection, foreign matter embedded, sliver, burr, or sharp edge inside or outside the kit. 2. Any surface unclean, rough, misaligned or containing any crack, nick or other flaw. 3. Any component missing, malformed, fractured, or otherwise damaged. 4. Any frayed or cut webbing or strap. 5. Any component loose or otherwise not securely retained. 6. Incorrect assembling or improper position of any component. 7. Any functioning part that works with difficulty. 8. Any faulty workmanship or other irregularities. 9. Any measurement not within specified dimension and tolerance. 10. Any spot or stain. 1/ 11. Any corrosion, scale, pit or dent. 12. Any fibrous component that contains any tear, cut, hole, needle chew, burn, patch, mend or abraded area.	201. Any marking missing, insufficient, incorrect, illegible, or not permanent. 202. Any color not as specified or does not approximately match specified color. 203. Color or any component not as specified or does not approximately match color of container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:33Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of defects for visual examination of the rigid seat survival kit (continued).

CRITICAL	MINOR
13. Any component not as specified or any defect of component or defect of assembly, not herein classified. 1/ 14. Any component, component part or required operation omitted or any operation improperly performed, not herein classified. 1/	

1/ The defect shall be classified and scored as a critical defect when it seriously affects the serviceability or appearance, otherwise it shall be classified and scored as a minor defect.

TABLE III. Classification of defects for packaging.

ITEM	DEFECTS
Exterior and interior markings	Missing, incorrect, incomplete, illegible; of improper size, location, sequence or method of application; markings not the same on the interior and exterior containers.
Workmanship	Inadequate application of the components, such as incomplete closure of the unit package, intermediate package, container flaps, or loose strappings, etc.; bulging or distortion of the containers.
Exterior and interior weight or content	Number per container is more or less than required; gross or net weight exceeds the requirement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:33Z
Check the source to verify that this is the current version before use.



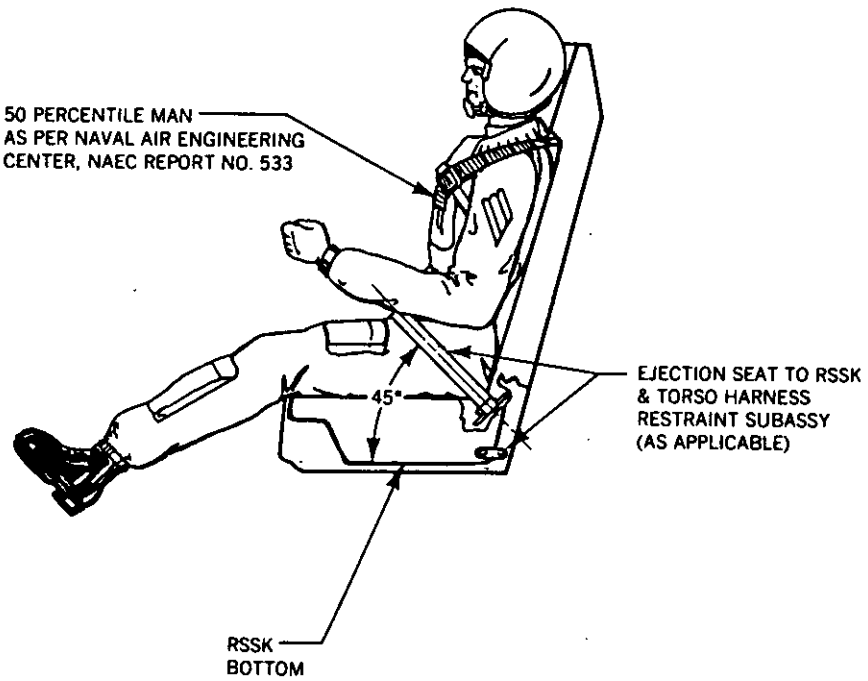


FIGURE 1. Optimum design arrangement of the ejection seat to RSSK & torso harness restraint subassembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:33Z
Check the source to verify that this is the current version before use.

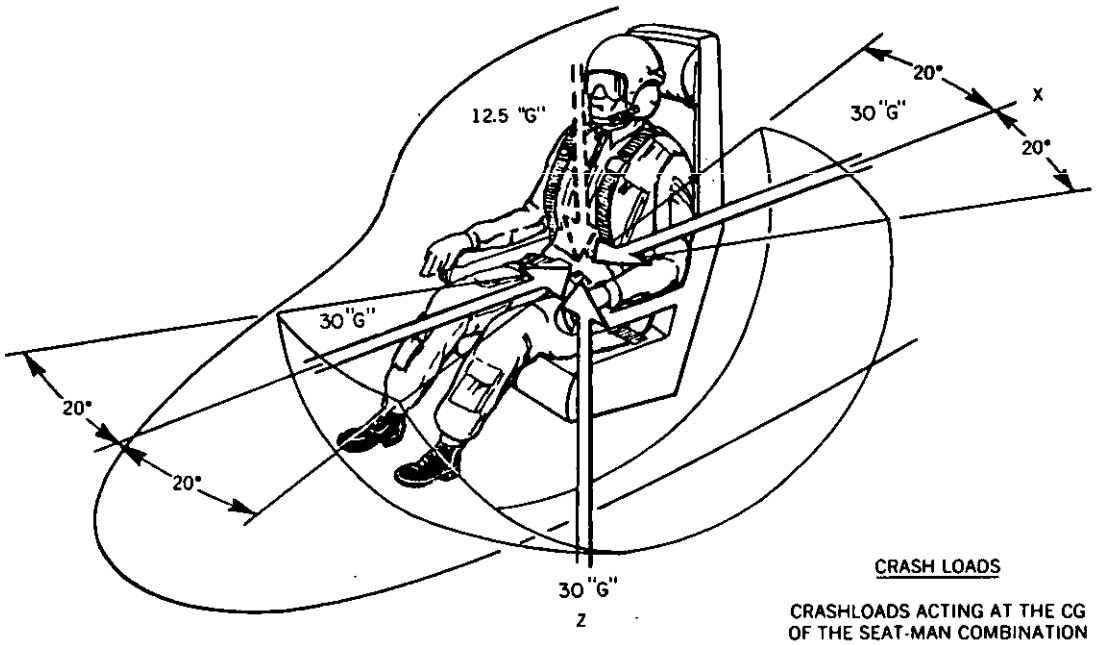

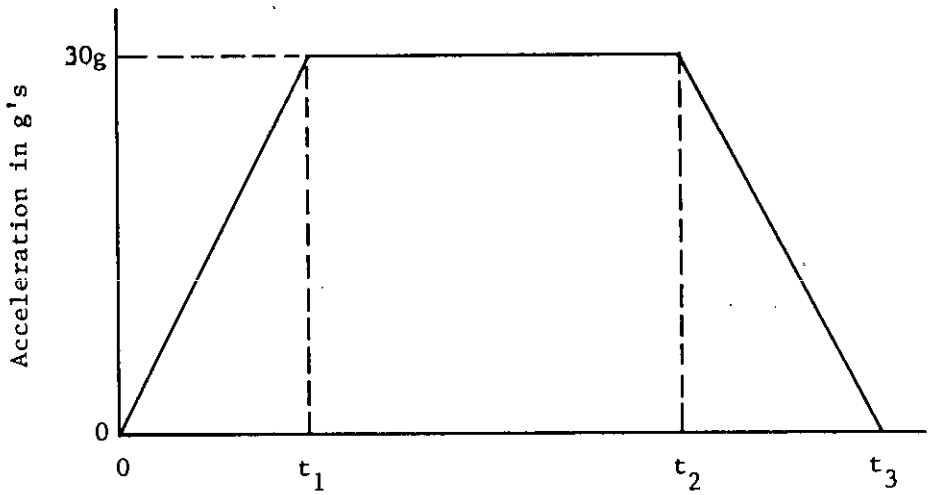

Notes:

1. Approximate pulse shape: trapezoidal
2. Maximum acceleration: 30^{+1}_{-2}g
3. Maximum velocity: 77 ±3 feet per second
4. Nominal rise time (t_1): 20 milliseconds
5. Nominal dwell time (t_2-t_1): 60 milliseconds
6. Nominal total time (t_3): 100 milliseconds

FIGURE 2. Crash load acceleration profile.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:33Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-S-81040C(AS)	Survival Kit Container, Aircraft Seat, w/o Oxygen, Gen. Spec.

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:33Z
Check the source to verify that this is the current version before use.