
| INCH-POUND |
MIL-C-55302/127B(USAF)
6 MAY 1993
SUPERSEDING
MIL-C-55302/127A(USAF)
21 September 1988

MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: RECEPTACLE, SINGLE ROW, 2 THROUGH 65 CONTACT POSITIONS, FOR PRINTED WIRING BOARDS (1/16", 3/32", AND 1/8") (.100 SPACING)

This specification sheet is approved for use by Rome Air Development Center, Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-55302.

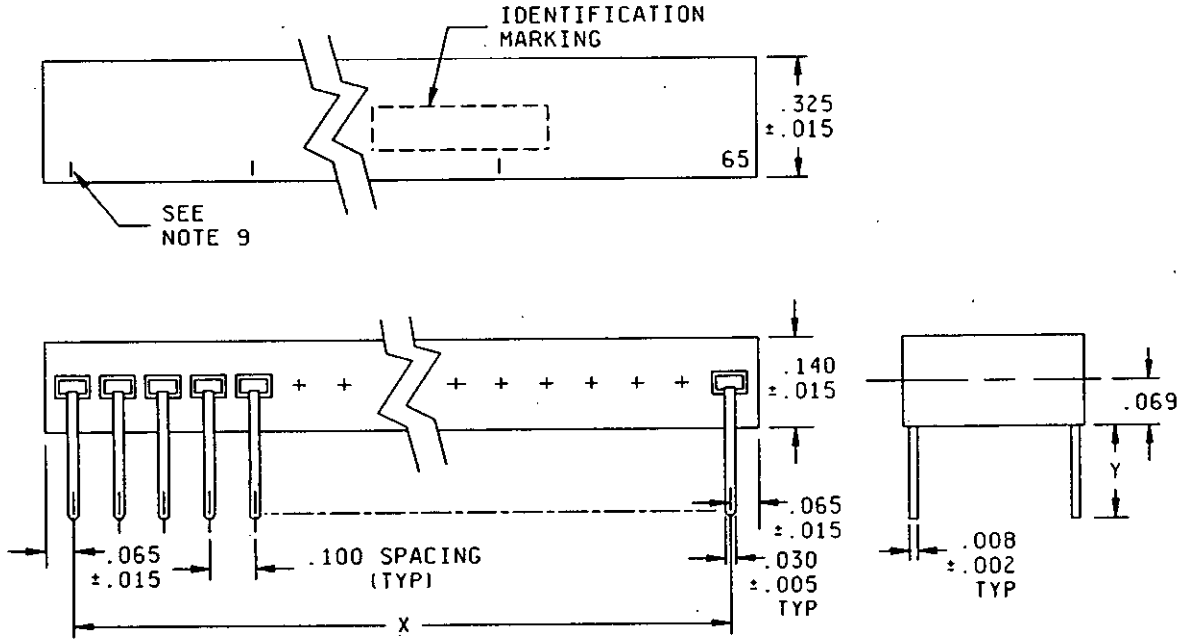


(B) FIGURE 1. Connectors, receptacle, .100 (2.54 mm) spacing.

(B) denotes change


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:51Z
Check the source to verify that this is the current version before use.

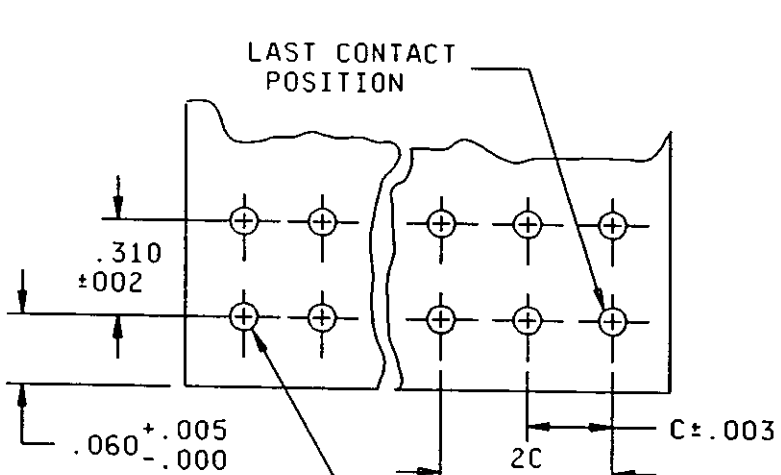

RECOMMENDED PRINTED CIRCUIT BOARD HOLE LAYOUT

C - Contact centerline to be .100 (2.54 mm); ±.003 (.08 mm) tolerances not to accumulate within one connector pattern.

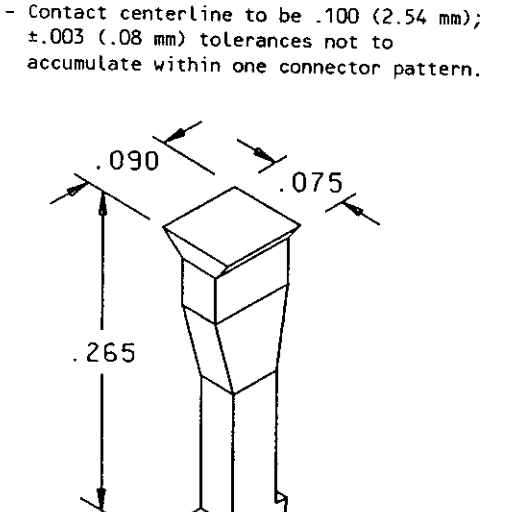

KEY PLUG
P/N M55302/127-00KY

(B) FIGURE 1. Connectors, receptacle, .100 (2.54 mm) spacing - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:51Z
Check the source to verify that this is the current version before use.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.010 (0.25 mm).
4. The mating post array must be maintained on .100 centerline grid spacing.
5. Post engagement length is .390 maximum, .308 minimum from edge of board, when connector is mounted in accordance with figure 1. Total mating positions to be determined by connector size per table I.
6. Post location tolerance not to accumulate.
7. Mating post tips must be maintained within .015 diameter true position allowance (total).
8. Mating posts may consist of post staked directly into printed circuit boards, or mounted in insulator bodies.
9. The first and last circuit shall be numbered and every fifth circuit shall have an identifiable mark on the top surface of the housing beginning with the first circuit on the left (no. 1) looking at the mating face of the connector.

Inches	mm	Inches	mm	Inches	mm
.002	0.05	.035	0.89	.100	2.54
.003	0.08	.060	1.52	.140	3.56
.005	0.13	.065	1.65	.265	6.73
.015	0.38	.069	1.75	.310	7.87
.020	0.51	.075	1.90	.325	8.26
.031	0.79	.090	2.29	.390	9.91

(B) FIGURE 1. Connectors, receptacle, .100 (2.54 mm) spacing - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:51Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions. 1/

Number of contact positions	Dimension X	Number of contact positions	Dimension X	Number of contact positions	Dimension X	Number of contact positions	Dimension X
2	.100 (2.54)	18	1.700 (43.18)	34	3.300 (83.82)	50	4.900 (124.46)
3	.200 (5.08)	19	1.800 (45.72)	35	3.400 (86.36)	51	5.000 (127.00)
4	.300 (7.62)	20	1.900 (48.26)	36	3.500 (88.90)	52	5.100 (129.54)
5	.400 (10.16)	21	2.000 (50.80)	37	3.600 (91.44)	53	5.200 (132.08)
6	.500 (12.70)	22	2.100 (53.34)	38	3.700 (93.98)	54	5.300 (134.62)
7	.600 (15.24)	23	2.200 (55.88)	39	3.800 (96.52)	55	5.400 (137.16)
8	.700 (17.78)	24	2.300 (58.42)	40	3.900 (99.06)	56	5.500 (139.70)
9	.800 (20.32)	25	2.400 (60.96)	41	4.000 (101.60)	57	5.600 (142.24)
10	.900 (22.86)	26	2.500 (63.50)	42	4.100 (104.14)	58	5.700 (144.78)
11	1.000 (25.40)	27	2.600 (66.04)	43	4.200 (106.68)	59	5.800 (147.32)
12	1.100 (27.94)	28	2.700 (68.58)	44	4.300 (109.22)	60	5.900 (149.86)
13	1.200 (30.48)	29	2.800 (71.12)	45	4.400 (111.76)	61	6.000 (152.40)
14	1.300 (33.02)	30	2.900 (73.66)	46	4.500 (114.30)	62	6.100 (154.94)
15	1.400 (35.56)	31	3.000 (76.20)	47	4.600 (116.84)	63	6.200 (157.48)
16	1.500 (38.10)	32	3.100 (78.74)	48	4.700 (119.38)	64	6.300 (160.02)
17	1.600 (40.64)	33	3.200 (81.28)	49	4.800 (121.92)	65	6.400 (162.56)

1/ Metric equivalents are in parentheses.


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:51Z
Check the source to verify that this is the current version before use.

TABLE II. P.C. board thickness.

Type	Board thickness	Y
1	.062	.115
2	.093	.145
3	.125	(B) .175

TABLE III. Contact plating.

Code	Contact area	Remainder
A	Class 1	Flash
B	Class 1	Class 1
(B) C	Class 1	Tin/lead plated or dipped

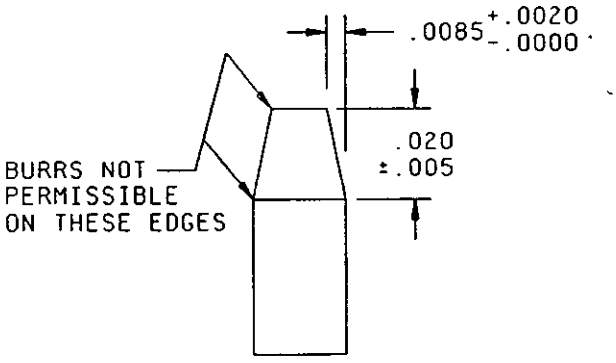

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

Inches	mm
.0020	0.051
.005	0.13
.0085	0.216
.020	0.51

FIGURE 2. Mating post tip configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:51Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configurations: See figures 1 and 2 and tables I, II, and III.

Material:

Body: In accordance with MIL-C-55302.

Plating: The contact plating shall be gold in accordance with MIL-C-55302 as specified in table III, over nickel plating in accordance with MIL-C-55302.

Contact identification: See figure 1.

Mating and unmating: The maximum connector mating force shall be 7 ounces times the number of contact positions, and the minimum connector unmating force shall be .75 ounce times the number of contact positions. For purposes of testing, the mating plug connector shall be considered to be the correct number of .025 wrappost in accordance with MIL-STD-1130, gold plated. Maximum post engagement length is .390 inch and minimum post engagement length is .308 inch, when connector is mounted as shown on figure 1.

Contact resistance: No individual contact pair shall have a resistance exceeding 12 milliohms when mated to a gold plated .025 wrappost in accordance with MIL-STD-1130.

Dielectric withstanding voltage:

Sea level: 750 volts rms.

High altitude: 275 volts rms.

Current rating: 3.0 amperes maximum.

Mating post: See figure 2. For total mating positions, see table I.

Contact engagement and separation force:

Engagement force: Shall be 6 ounces maximum after three insertions of a .0260 +.0000, -.0001 inch square pin.

Separation force: Shall be .75 ounce minimum.

Printed wiring terminations: See figure 1.

Polarization: Connector polarization may be accomplished by use of a keying plug (P/N M55302/127-00KY) which is inserted into the particular contact circuit to be keyed. Keying plug is nylon in accordance with ASTM D-4066.

Color: Natural.

Alignment: To be accomplished by user.

Method of mounting: Not applicable.


Oversize pin exclusion: Applies to sockets only, shall not accept a .050 inch diameter pin.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:51Z
Check the source to verify that this is the current version before use.

Contact bend test: The body of the contact shall be slowly inclined so as to bend the contact through 90° and then return it to the original position. A bend through 90° and return to original position shall be defined as one bend. The test shall include three bending cycles.

Marking: In accordance with MIL-STD-1285. Cavity identification in accordance with figure 1.

Part number: Shall be as shown in the following example:

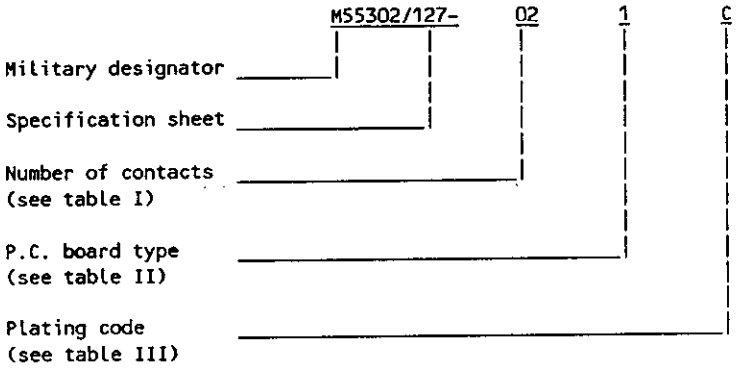

CONCLUDING MATERIAL

Custodian:
Air Force - 17

Review activities:
Air Force - 11, 85, 99
DLA - ES

User activity:
Air Force - 19

Preparing activity:
Air Force - 17

Agent:
DLA - ES

(Project 5935-F400-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:51Z
Check the source to verify that this is the current version before use.