
MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: RECEPTACLE WITH PIN CONTACTS, 2 FEMALE KEYING GUIDES, 3.315 INCHES LENGTH, FOR PRINTED WIRING BOARDS (.100 INCH SPACING)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-55302.

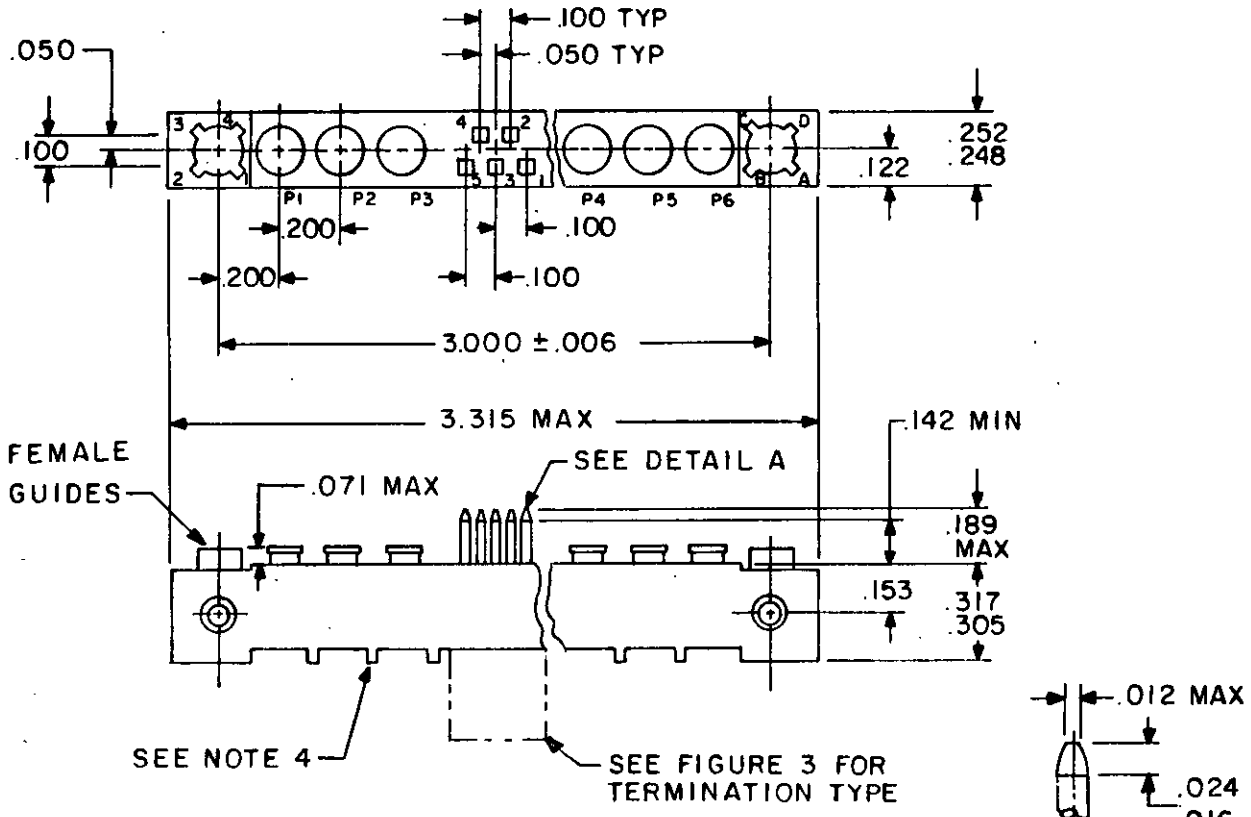


INCHES	MM	INCHES	MM	INCHES	MM
.006	0.15	.071	1.80	.248	6.30
.012	0.30	.100	2.54	.252	6.40
.016	0.41	.122	3.10	.305	7.45
.0229	0.582	.142	3.61	.317	8.05
.024	0.61	.153	3.89	3.000	76.20
.0244	0.620	.189	4.80	3.315	84.20
.050	1.27	.200	5.08		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005(.13 mm).
4. Standoffs are located between each cable hole and between each hole and contact hole set.


FIGURE 1. Connector, plug (.100 inch spacing).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

FSC 5935

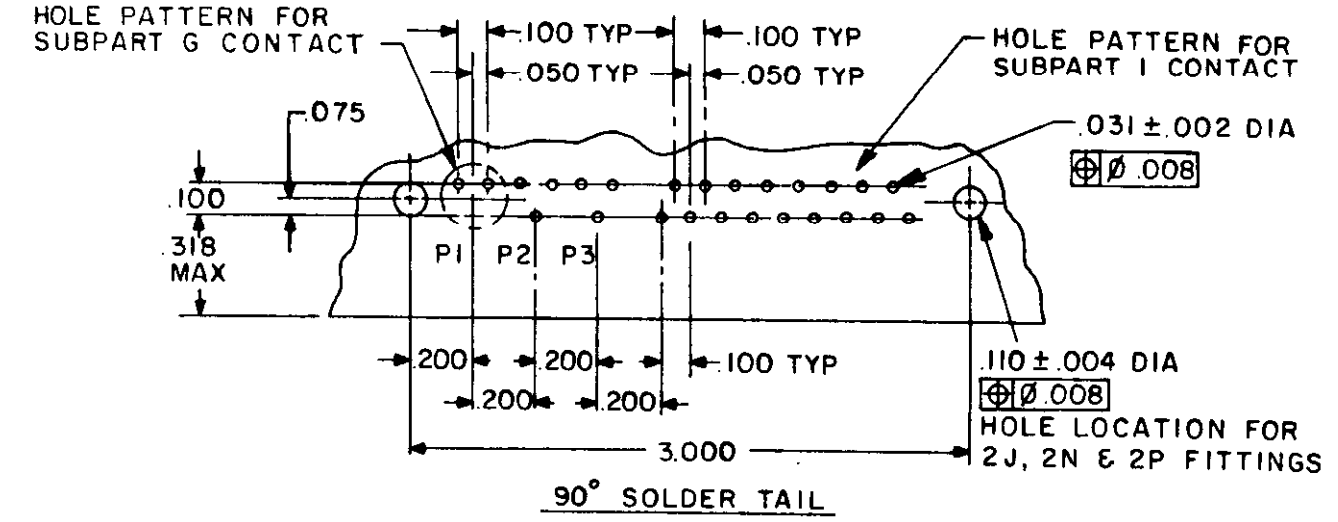

90° SOLDER TAIL

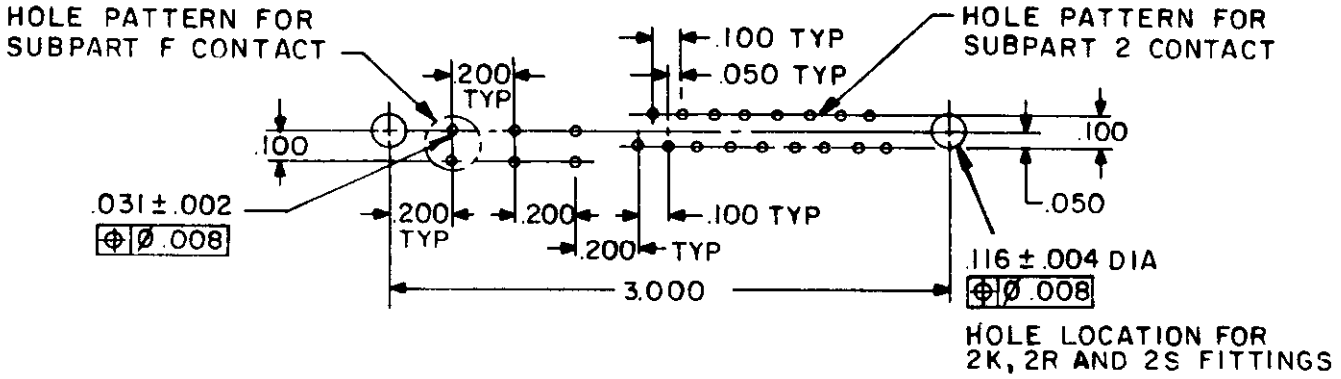


STRAIGHT-THRU SOLDER TAIL


INCHES	MM	INCHES	MM
.002	0.05	.100	2.54
.004	0.10	.110	2.79
.008	0.20	.116	2.95
.031	0.79	.200	5.08
.050	1.27	.318	8.08
.075	1.91	3.000	76.20

FIGURE 2. Recommended hole patterns.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

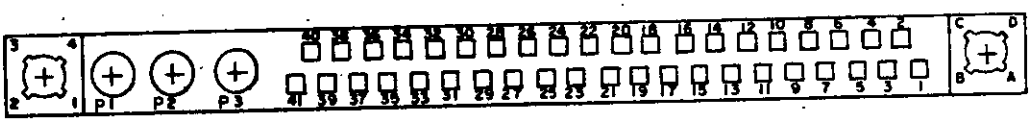


Part number
M55302/147A

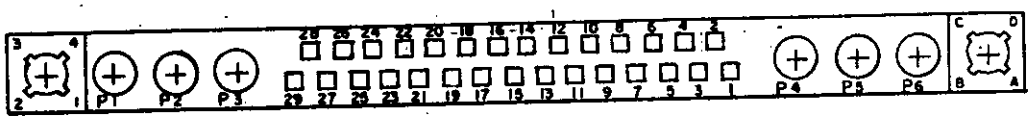

Part number
M55302/147B

FIGURE 3. Contact arrangements and keying arrangements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

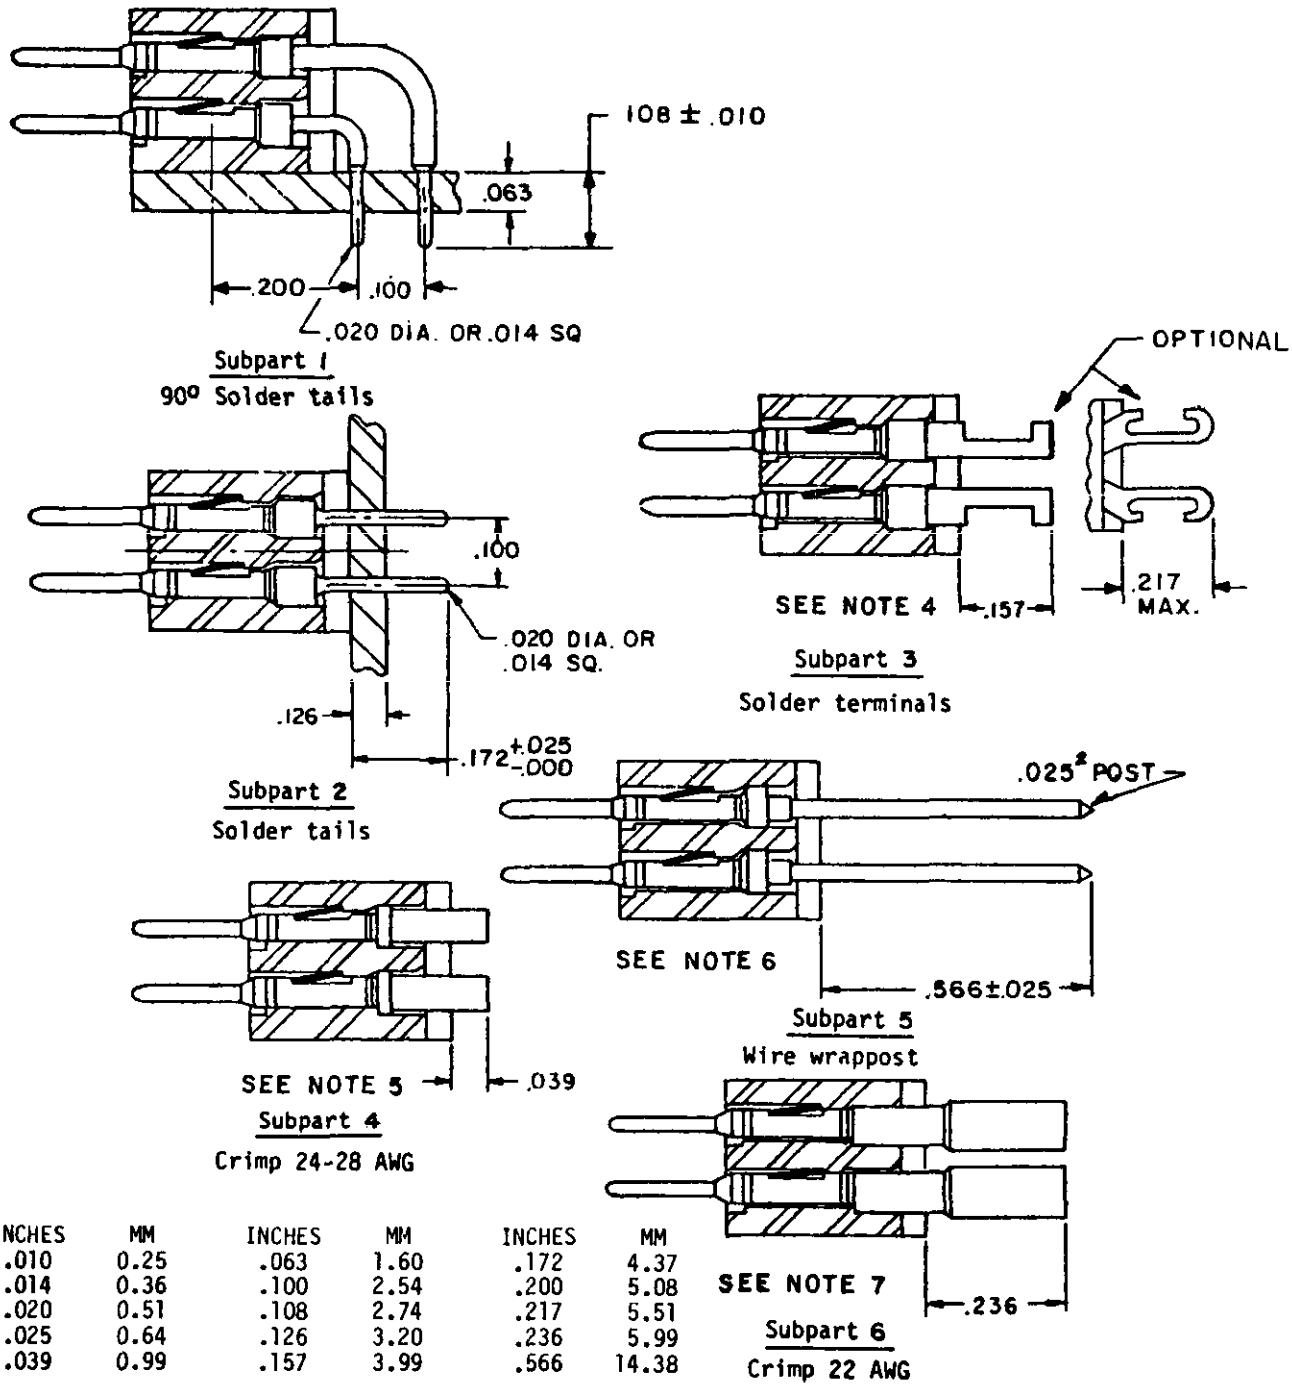


INCHES	MM	INCHES	MM	INCHES	MM
.010	0.25	.063	1.60	.172	4.37
.014	0.36	.100	2.54	.200	5.08
.020	0.51	.108	2.74	.217	5.51
.025	0.64	.126	3.20	.236	5.99
.039	0.99	.157	3.99	.566	14.38


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).
4. Solder tail accepts no. 22 AWG wire.
5. Crimp contact accepts no. 22-26 AWG wire.
6. Contact with .025 in^2 (0.64 mm^2) wrappost per MIL-STD-1130.
7. Crimp contact with insulation support accepts no. 22 AWG wire.

FIGURE 4. Connector terminations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

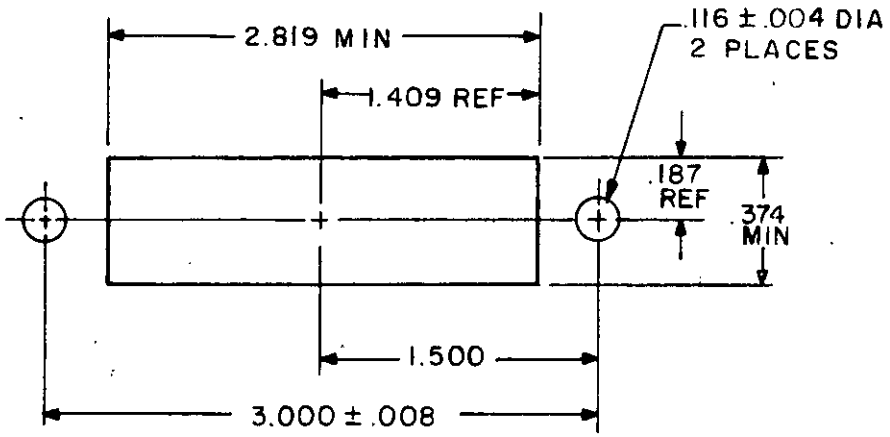

FIXED MOUNT

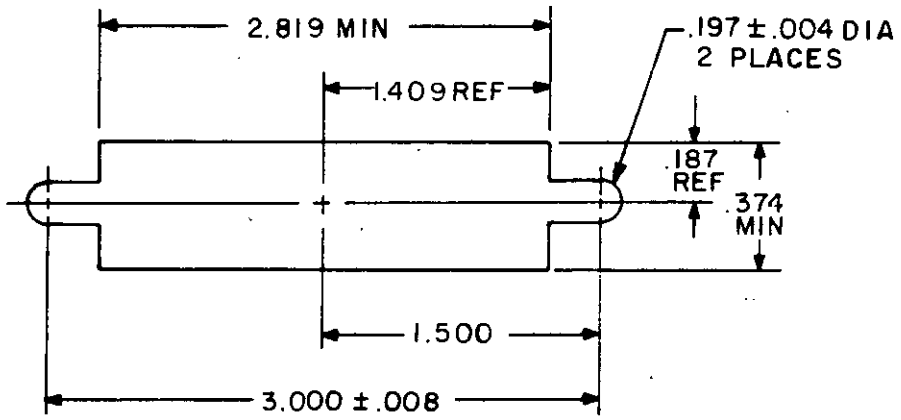

FLOATING MOUNT

INCHES	MM	INCHES	MM
.004	0.10	.374	9.50
.008	0.20	1.409	35.79
.116	2.95	1.500	38.10
.187	4.75	2.819	71.60
.197	5.00	3.000	76.20

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 5. Recommended panel cutouts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figures.

Material and finish:

Insulator: Flame retardant diallyl phthalate, per MIL-M-14, type SDGF.

Contact identification: See figure 3.

Contact retention: 4 pounds minimum per contact.

Contact engagement: 0.7 ounce minimum, 4 ounces maximum.

Contact separation: 3.5 ounces minimum.

Contact resistance: The contact resistance shall not exceed 12 milliohms.

Dielectric withstanding voltage:

Sea level: 1,000 V rms, 60 Hz.

High altitude: 300 V rms, 60 Hz.

Current rating, maximum: 2.5 amperes at 25°C.

Keying pin: Moldings and mounting hardware provide 16 polarizing positions. Keys are constructed per M55302/154. Connectors are supplied with keying pins in the "1" and "A" positions. When required, connectors can be easily keyed to the desired positions by using a standard wrench or screwdriver.

Crimping tools:

Basic tool: M22520/2-01.

Positioner: M22520/2-37.

Removal tools:

Power contacts (for subpart 5 and 7): See M81969/40-01.

RF coax contacts: See M81969/41-01.

Hood types: See MIL-C-55302/155.

Mounting hardware: See MIL-C-55302/154, table I, receptacle.

Mating connectors: Shall conform to MIL-C-55302/152.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

Part number: Consists of the letter M, the basic number of the specification sheet, and a dash number compiled as follows:

Example:

M55302/147 * * * 2 *

Specification sheet number
Receptacle with pin contacts

Contact arrangement
(see figure 3)

Contact type - 2.5 amperes
(see figure 4)
0 - not applicable

Contact type - Coaxial
X - less coaxial contact

Indexing type
2 - Square post (16 positions)

Mounting hardware
(See MIL-C-55302/154)

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - CR
Navy - EC
Air Force - 17

Review activities:
Army - AR, AT, AV, MI
Navy - AS, OS, SH
Air Force - 11, 85, 99
DLA - ES

User activities:
Army - ME
Navy - MC
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Army - CR

(Project 5935-3373-8)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.